
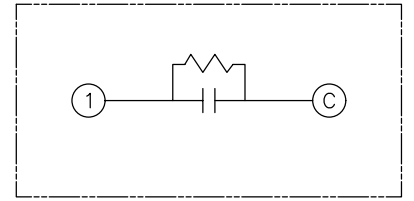


SIZE <b>A</b>	DWG. NO. 16L0006WH3	SH 2	REV
REV			

TOL	+/-
A	.06
B	.12
C	.18
D	.25
E	.04

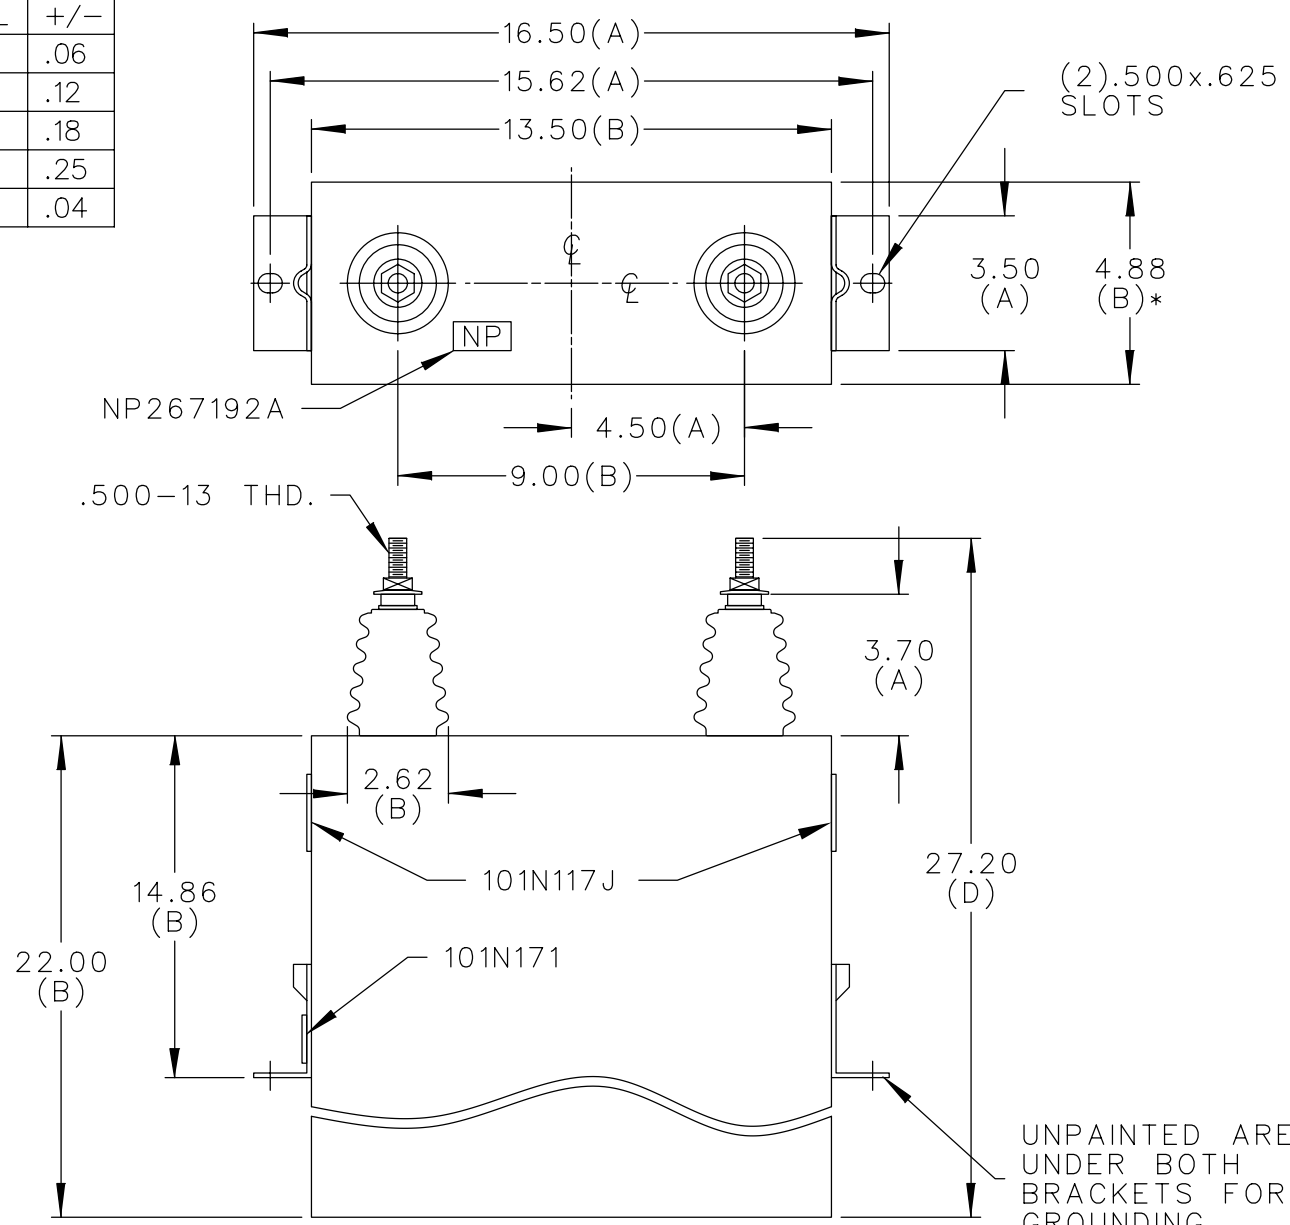

SCHEMATIC DIAGRAM - 102

2800 V 1 PH  
 230 KVAR 60 Hz  
 CAT. 16L0006WH3 SN  
 1.9 GAL.COMBUSTIBLE LIQUID  
 101N171 GEH-2743

UNPAINTED AREA  
 UNDER BOTH  
 BRACKETS FOR  
 GROUNDING

\* UP TO +.50  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

 CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	SIZE	FSCM NO	<b>OUTLINE</b> <b>16L0006WH3</b>	DISTR TO
	<b>A</b>	87 / 40 LB/KG		
DRAWN TMO	MAR 14, 1997	SCALE	SHEET 2	CONT ON 3
ISSUED				