



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

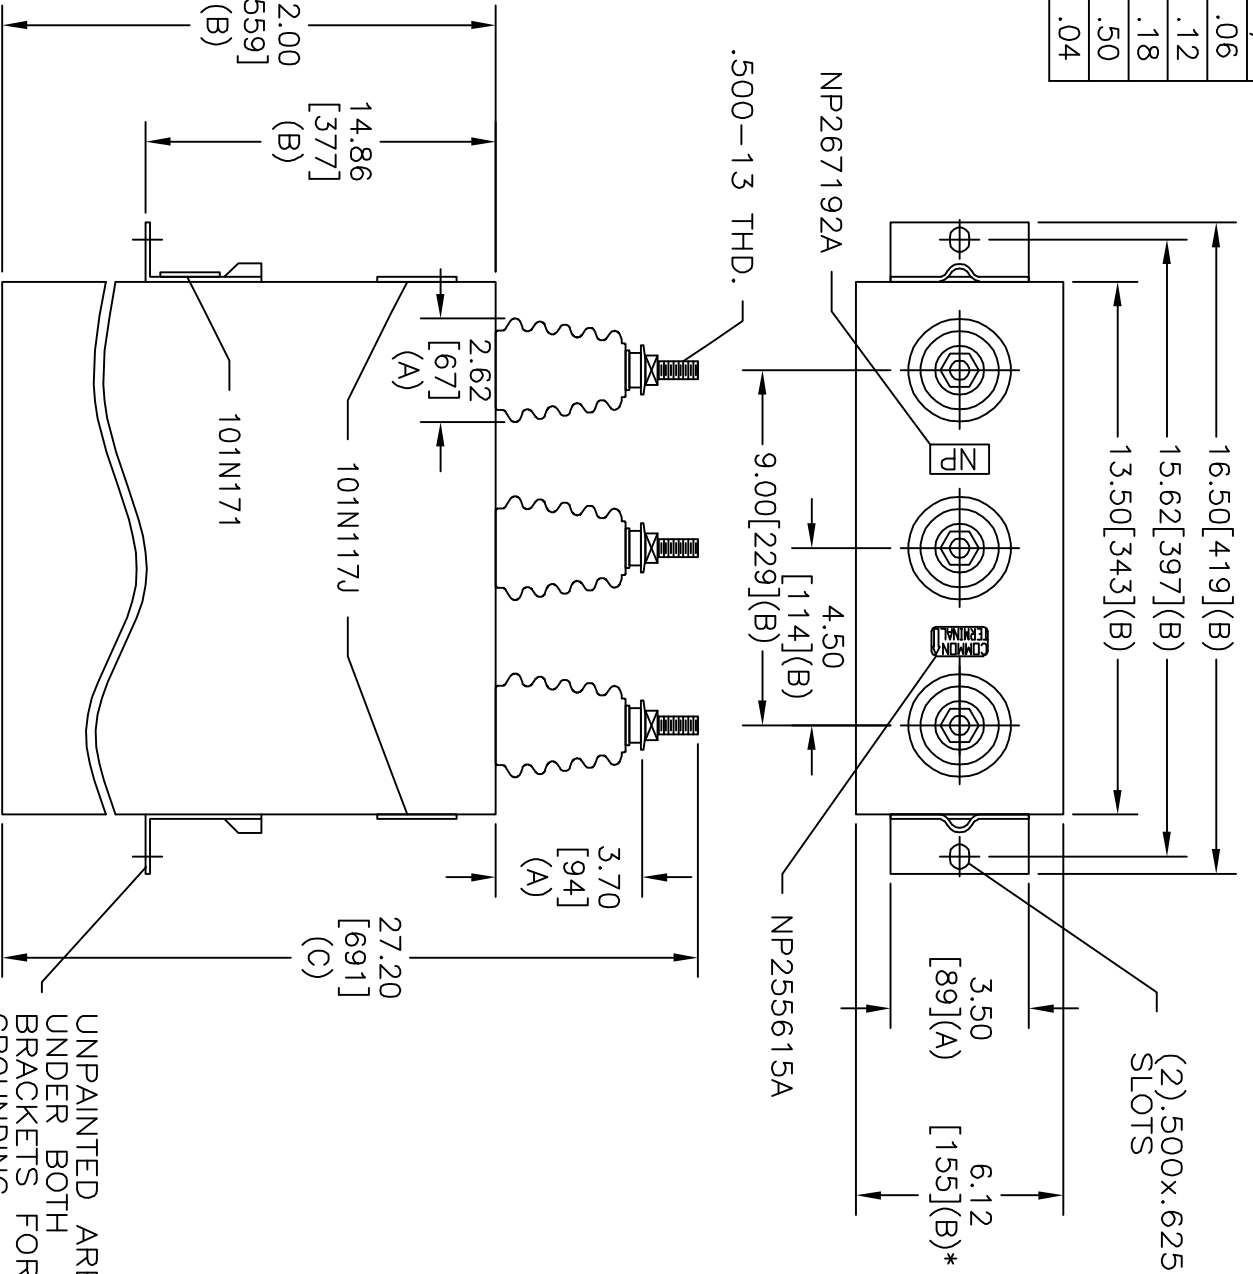

UNPAINTED AREA
UNDER BOTH
BRACKETS FOR
GROUNDING

TERM	UF	KVAR
1	67.7	200
2	67.7	200

SIZE	DWG NO	SHT	REV
A	16L0027WH3	2	
REV	DESCRIPTION	DATE	APPROVED

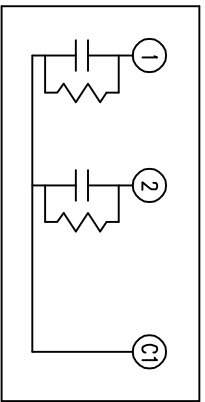

SCHEMATIC DIAGRAM - 212

2800V	1 PH	KVBIL
400	KVAR	60 Hz
CAT	16L0027WH3	SN
	3.0 GAL.	
101N171	MFG DATE	READ GEH-2743

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS
NP267192A

INDUSTRIAL SYSTEMS
FORT EDWARD, N.Y., U.S.A.
DRAWN B. ROSS
DATE JAN 20, 2005
ISSUED DATE 1/26/05

SIZE A
SCALE
OUTLINE
16L0027WH3
SHEET 2 CONT 3