



SIZE	DWG NO	SHT	REV
A	16L0029WH3	2	2
REV	DESCRIPTION	DATE	APPROVED
2	UPDATE TO AUTOCAD	7-21-04	EJM

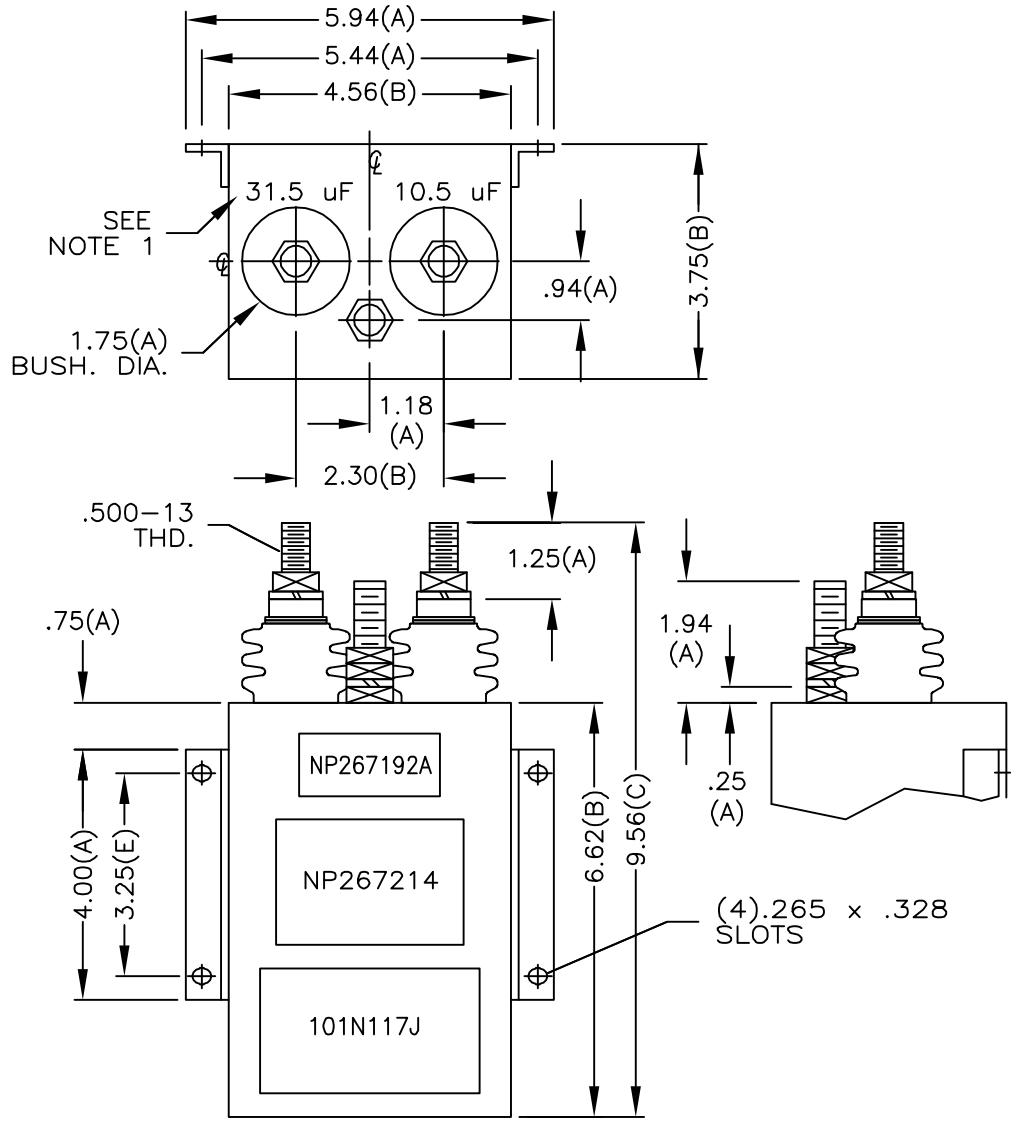

NOTE 1 - INK STAMP uF VALUES.

TOL	+/-
A	.06
B	.12
C	.18
D	.25
E	.02

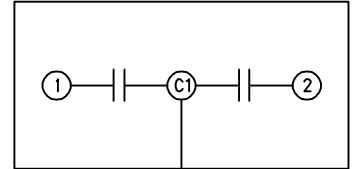

SCHEMATIC DIAGRAM - 226


TERM	uF	KVAR	VOLTS	KHZ
1	31.5	11.1	75	10
2	10.5	14.8	150	10

NO INTERNAL DISCH. RESISTORS
 CAT. 16L0029WH3 SN
 14.8KVAR 150V 10KHz 1PH
 11.1KVAR 75V 10KHz 1PH
 .22 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2743

NP267214

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

 INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.		SIZE A
DRAWN	E. McGinn	DATE 8-10-00
ISSUED		DATE 8-16-00

OUTLINE
16L0029WH3

SHEET 2 CONT ON -

DISTR. TO