


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

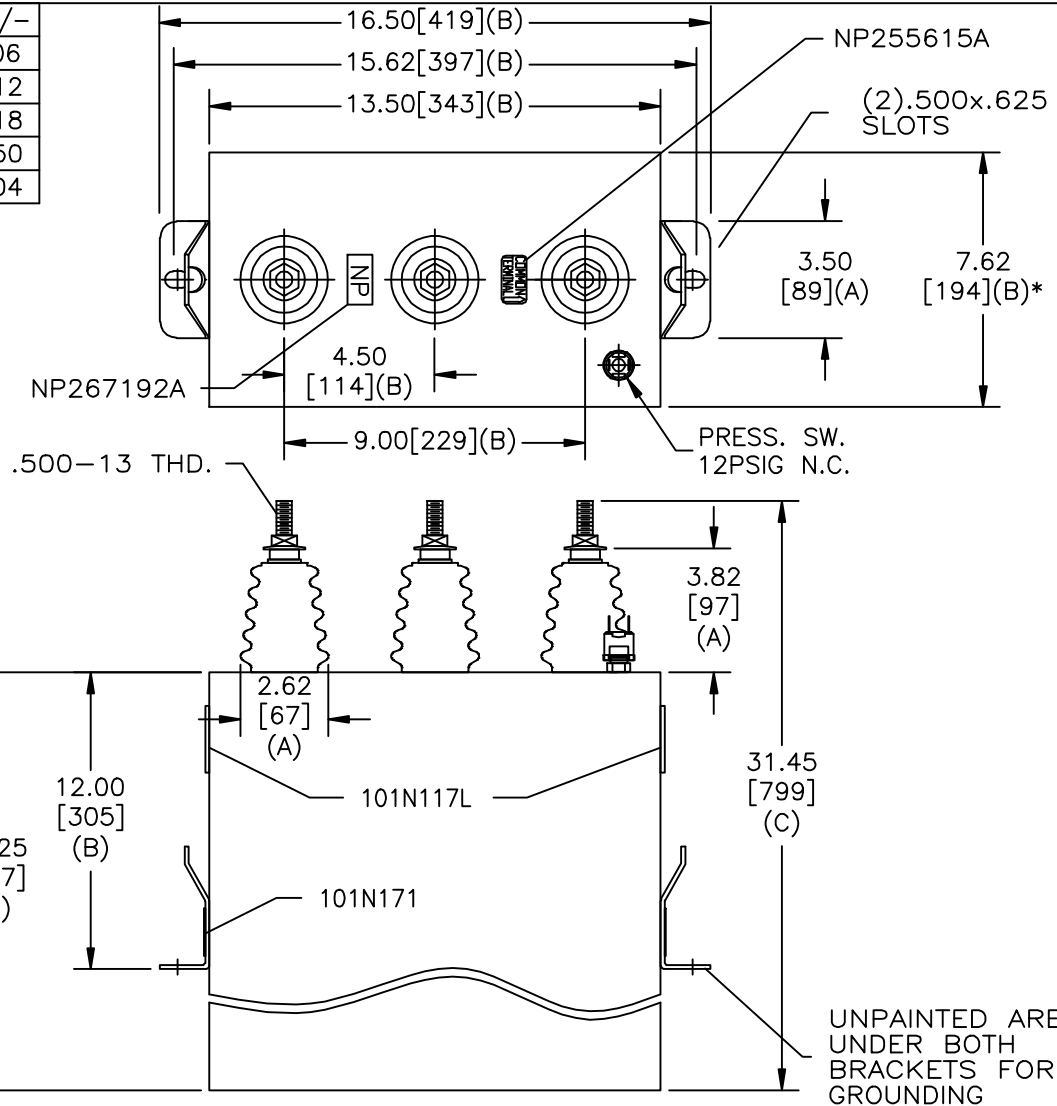


* UP TO +.50[13] CASE BULGE

SIZE	DWG NO 16L0041WH4	SHT 2	REV 2
REV	DESCRIPTION	DATE	APPROVED
2	UPDATE BRACKET TYPE	2/7/2011	DMR

TERM	uF	kVAR
1	70.74	200
2	70.74	200

kVAR	VOLTS	FREQ	PH
400	3000	50	1
400	1500	200	1

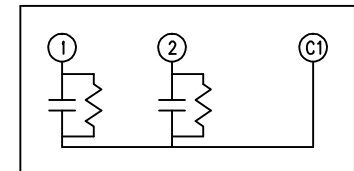

SCHEMATIC DIAGRAM - 212

3000/1500V 1 PH kVBIL
 400 KVAR 50/200Hz
 CAT 16L0041WH4 SN
 3.15 GAL.
 MFG DATE
 101N171 READ GEH- 2743

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS
 NP267192A

GE ENERGY FORT EDWARD, N.Y., U.S.A.		SIZE A
DRAWN B.ROSS	DATE MAR 6, 2003	SCALE
ISSUED	DATE	

OUTLINE 16L0041WH4

SHEET 2 CONT ON 3

DISTR. TO