
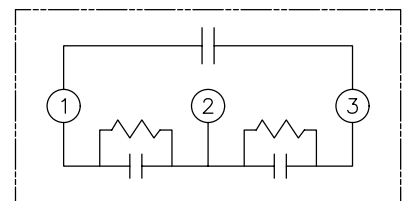


| TOL | +/- |
|-----|-----|
| A   | .06 |
| B   | .12 |
| C   | .18 |
| D   | .25 |
| E   | .04 |

|                  |                         |         |     |
|------------------|-------------------------|---------|-----|
| SIZE<br><b>A</b> | DWG NO.<br>16L0178WH3   | SH<br>2 | REV |
| REV<br>1         | MCGINN BRKT WAS 3.50 WD |         |     |

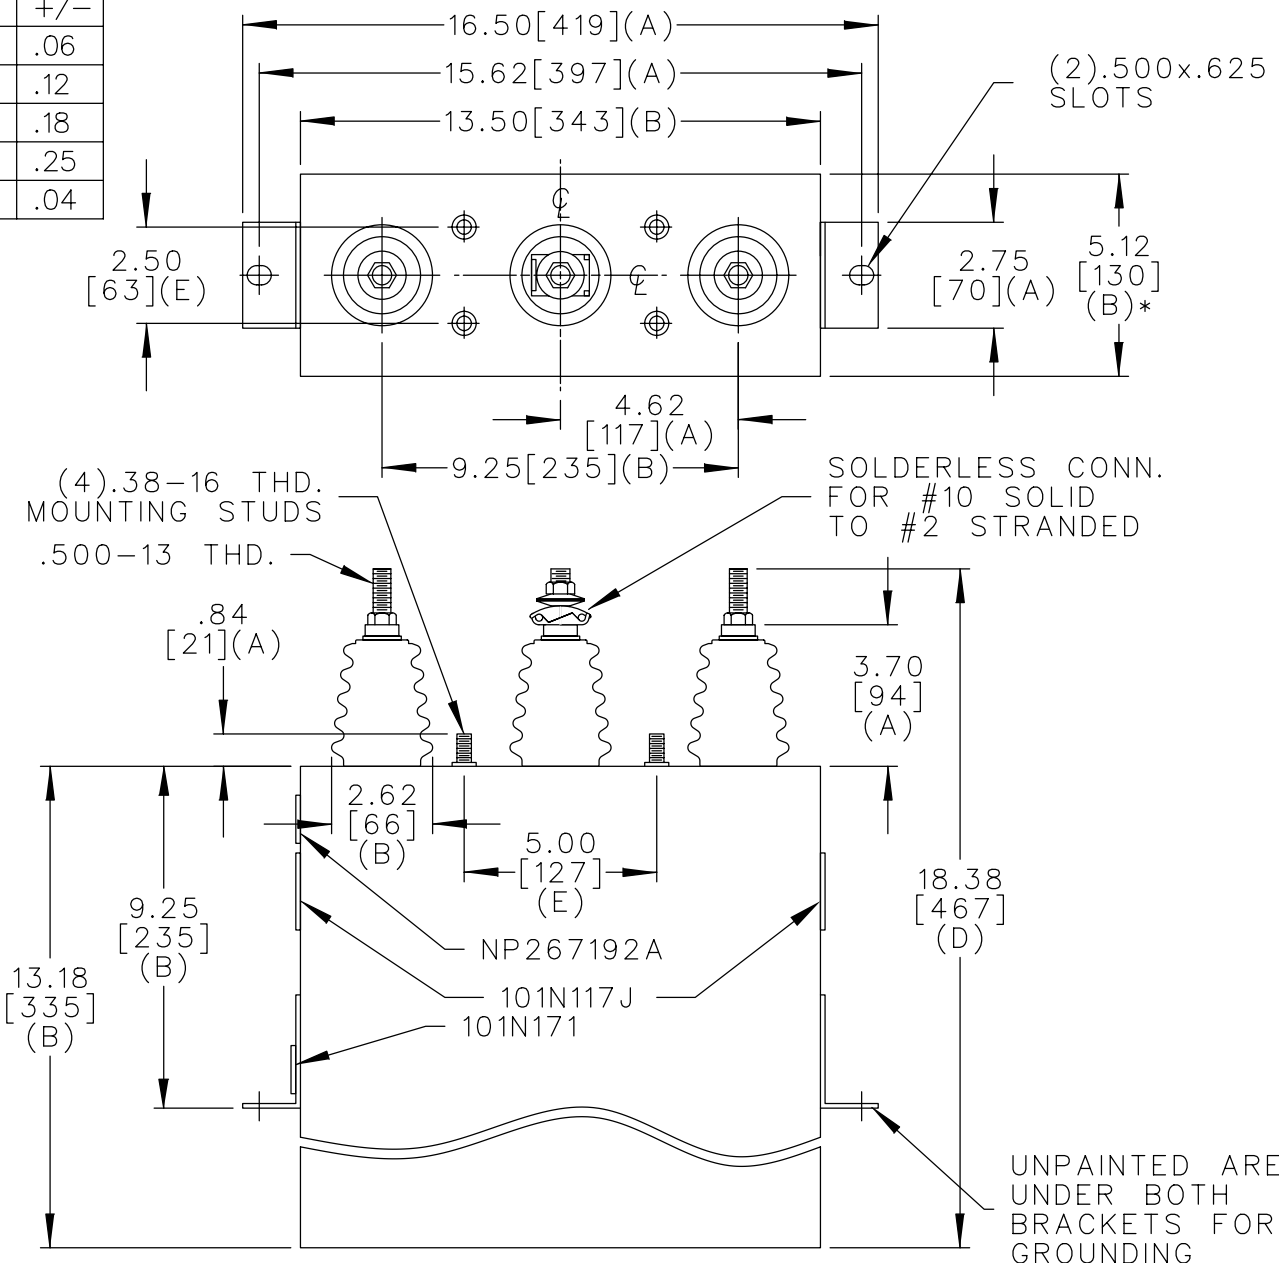

SCHEMATIC DIAGRAM - 304

1200V 3PH  
 125KVAR 60HZ 60KVBIL  
 CAT. 16L0178WH3 NO.  
 1.36 GAL. MFG DATE  
 GEH-2743

101N171

\* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

|        |   |              |                  |         |                                     |                |
|--------|---|--------------|------------------|---------|-------------------------------------|----------------|
|        | CAPACITOR & POWER PROTECTION<br>FORT EDWARD, N.Y., U.S.A. |              | SIZE<br><b>A</b> | FSCM NO | <b>OUTLINE</b><br><b>16L0178WH3</b> | SHEET 2 CONT 3 |
|        | DRAWN E.McGINN  | OCT. 9, 1997 | SCALE            |         |                                     |                |
| ISSUED | 10-15-97  |              |                  |         |                                     |                |

DISTR TO