
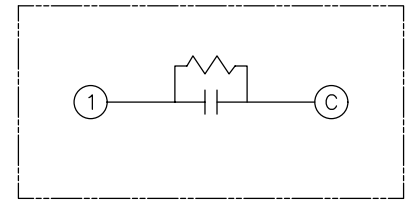


| | | | |
|------------------|-----------------------|---------|-----|
| SIZE A | DWG NO. 16L0219WH3 | SH 2 | REV |
| REV | | | |

| | |
|-----|-----|
| TOL | +/- |
| A | .06 |
| B | .12 |
| C | .18 |
| D | .04 |

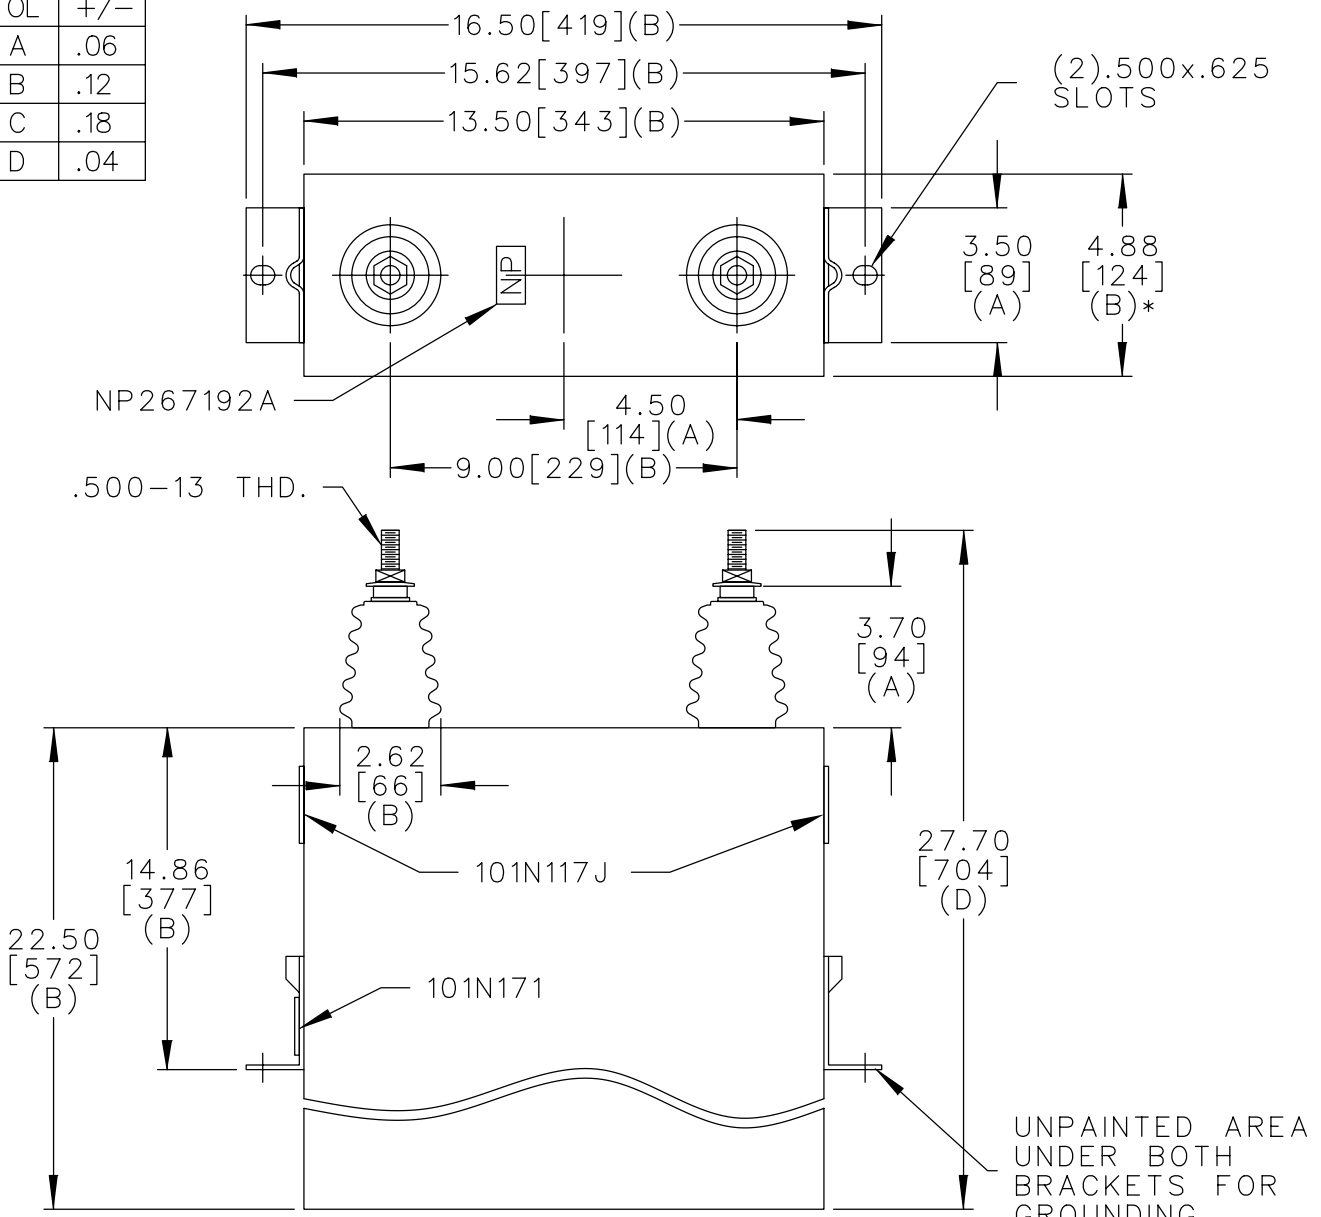

SCHEMATIC DIAGRAM - 102

3380V 1 PH
 242KVAR 60Hz KVBIL
 CAT. 16L0219WH3
 2.40 GAL.
 MFG DATE
 101N171 READ GEH-2743

* UP TO +.50
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

| | | | | |
|---|---------------------------------------|---------|-------------------------------------|----------|
| CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A. | SIZE A | FSCM NO | OUTLINE 16L0219WH3 | DISTR TO |
| | DRAWN E.McGINN APR. 4, 2000 ISSUED | SCALE | | |