



| TOL | +/- |
|-----|-----|
| A   | .06 |
| B   | .12 |
| C   | .18 |
| D   | .25 |
| E   | .04 |

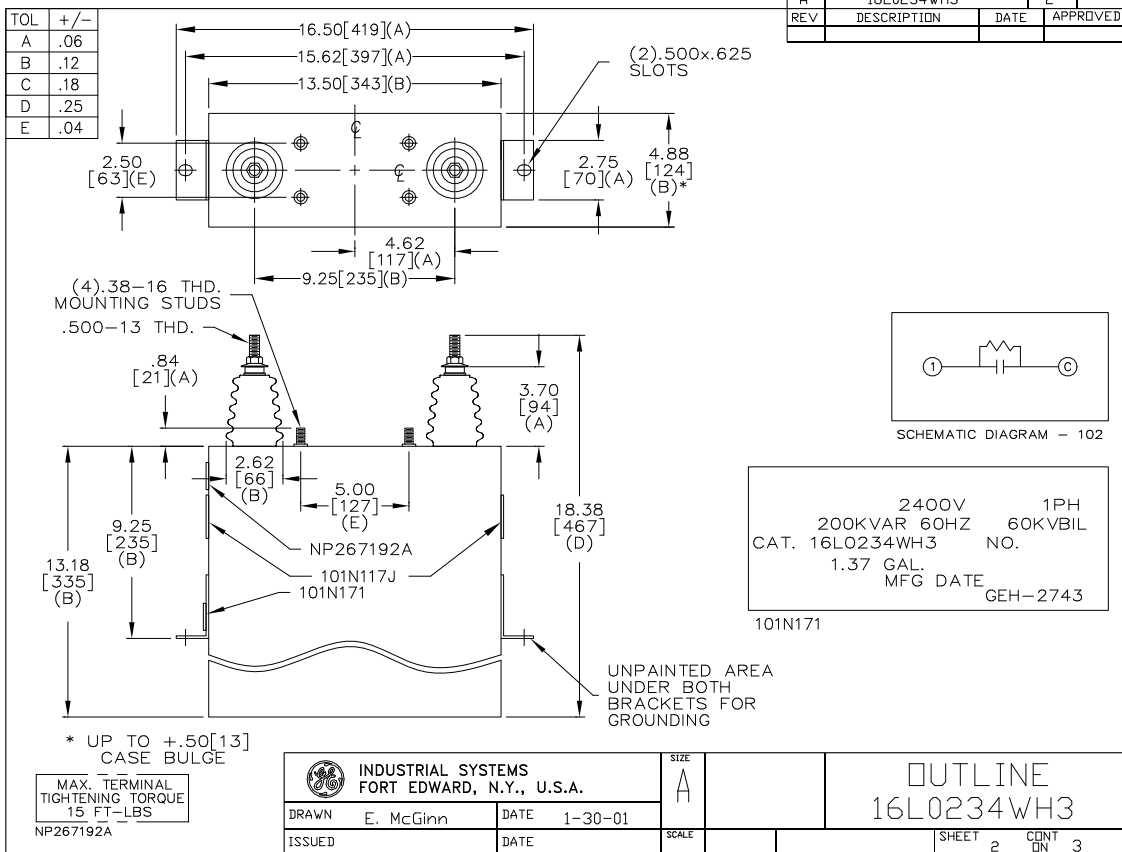

|           |                      |          |          |
|-----------|----------------------|----------|----------|
| SIZE<br>A | DWG NO<br>16L0234WH3 | SHT<br>2 | REV      |
| REV       | DESCRIPTION          | DATE     | APPROVED |
|           |                      |          |          |



SCHEMATIC DIAGRAM - 102

2400V 1PH  
200KVAR 60HZ 60KV BIL  
CAT. 16LQ234WH3 NO.  
1.37 GAL.  
MFG DATE  
GEH-2743

101N171

UNPAINTED AREA  
UNDER BOTH  
BRACKETS FOR  
GROUNDING

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS  
NP267192A

|                                                                                                                                                   |           |
|---------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
|  <b>INDUSTRIAL SYSTEMS</b><br><b>FORT EDWARD, N.Y., U.S.A.</b> |           |
| <b>DRAWN</b>                                                                                                                                      | E. McGinn |
| <b>ISSUED</b>                                                                                                                                     |           |
| <b>DATE</b>                                                                                                                                       | 1-30-01   |
| <b>DATE</b>                                                                                                                                       |           |

SIZE



OUTLINE  
16L0234WH3

|       |   |      |   |
|-------|---|------|---|
| SHEET | 2 | CONT | 3 |
|       |   | ON   |   |

DISTR. TO