


|     |     |
|-----|-----|
| TOL | +/- |
| A   | .06 |
| B   | .12 |
| C   | .18 |
| D   | .50 |
| E   | .04 |

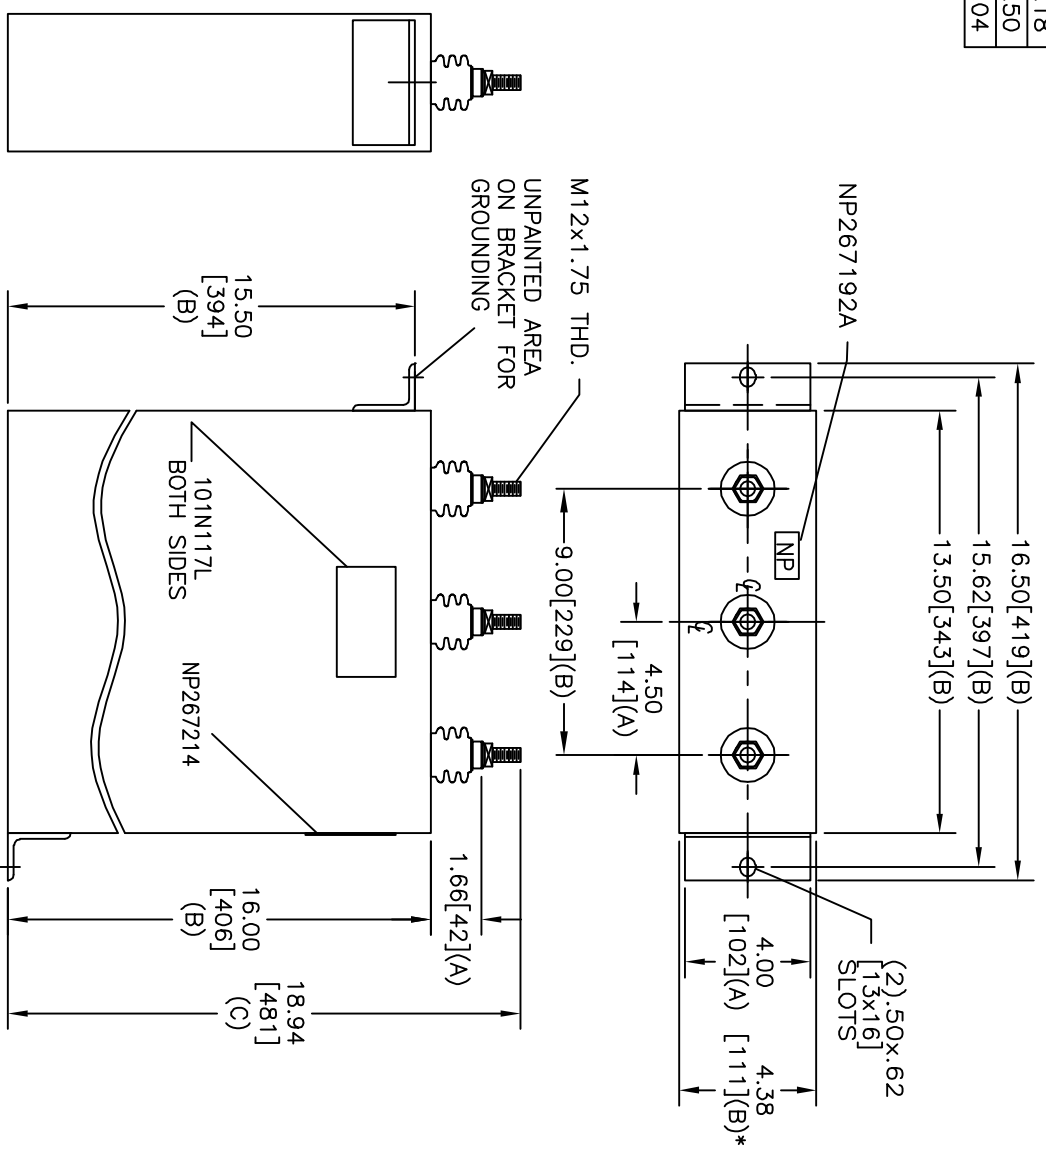


\* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

|      |                |           |          |
|------|----------------|-----------|----------|
| SIZE | DWG. NO.       | SHT       | REV      |
| A    | 16L0333WH3     | 2         | 5        |
| REV  | DESCRIPTION    | DATE      | APPROVED |
| 5    | CHG. NP & 117A | 2/23/2007 | BTR      |



**CAPACITOR**  
WITH INTERNAL DISCHARGE RESISTORS

CAT. 16L0333WH3 SN  
151X1228FG01PC02B

|           |                    |      |     |
|-----------|--------------------|------|-----|
| 71.8KVAR  | 690V               | 50HZ | 3PH |
| 86.1KVAR  | 690V               | 60HZ | 3PH |
| 65.0KVAR  | 600V               | 60HZ | 3PH |
| 1.53 GAL. | COMBUSTIBLE LIQUID |      |     |

CAUTION! BEFORE INSTALLING OR OPERATING READ GEH-2743

MADE IN U.S.A. NP267214

GE ENERGY  
FORT EDWARD, N.Y., U.S.A.

|        |         |      |             |
|--------|---------|------|-------------|
| DRAWN  | B. ROSS | DATE | APR 2, 2004 |
| ISSUED |         | DATE | 4/7/04      |

SIZE A  
SCALE

OUTLINE  
16L0333WH3

SHEET 2 CONT 3

DISTR. TO