

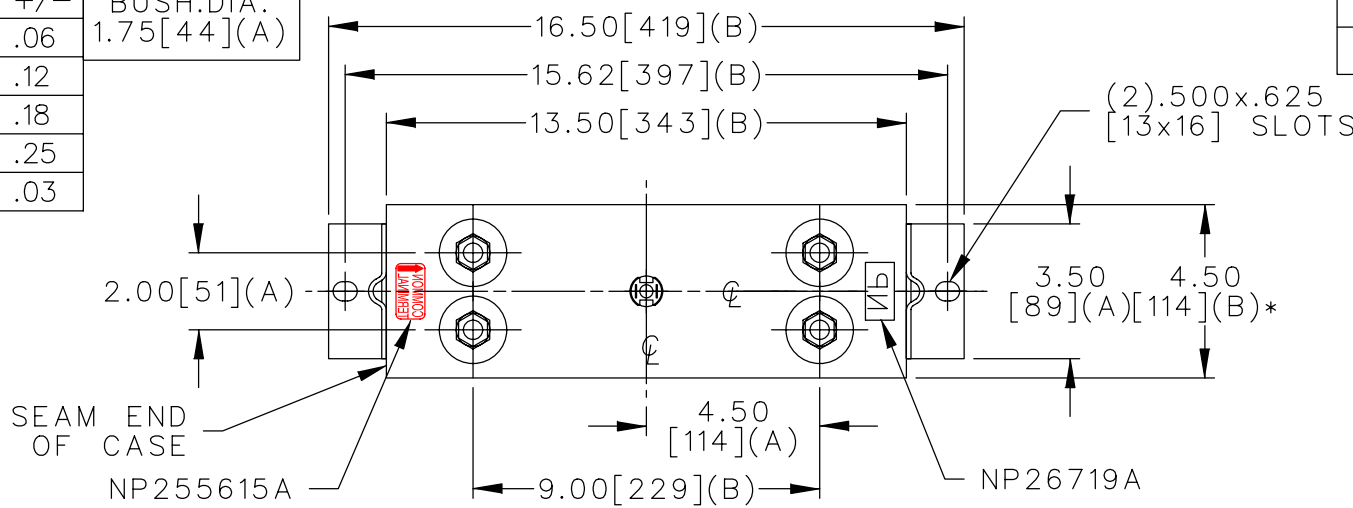


TOL	+/-	BUSH.DIA.
A	.06	1.75[44](A)
B	.12	
C	.18	
D	.25	
E	.03	

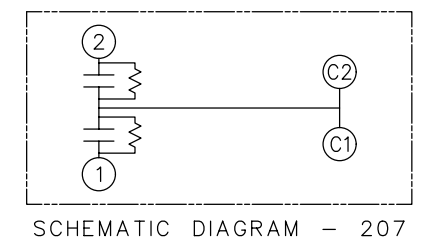

TERM	uF	kVAR
1	736.8	100
2	736.8	100

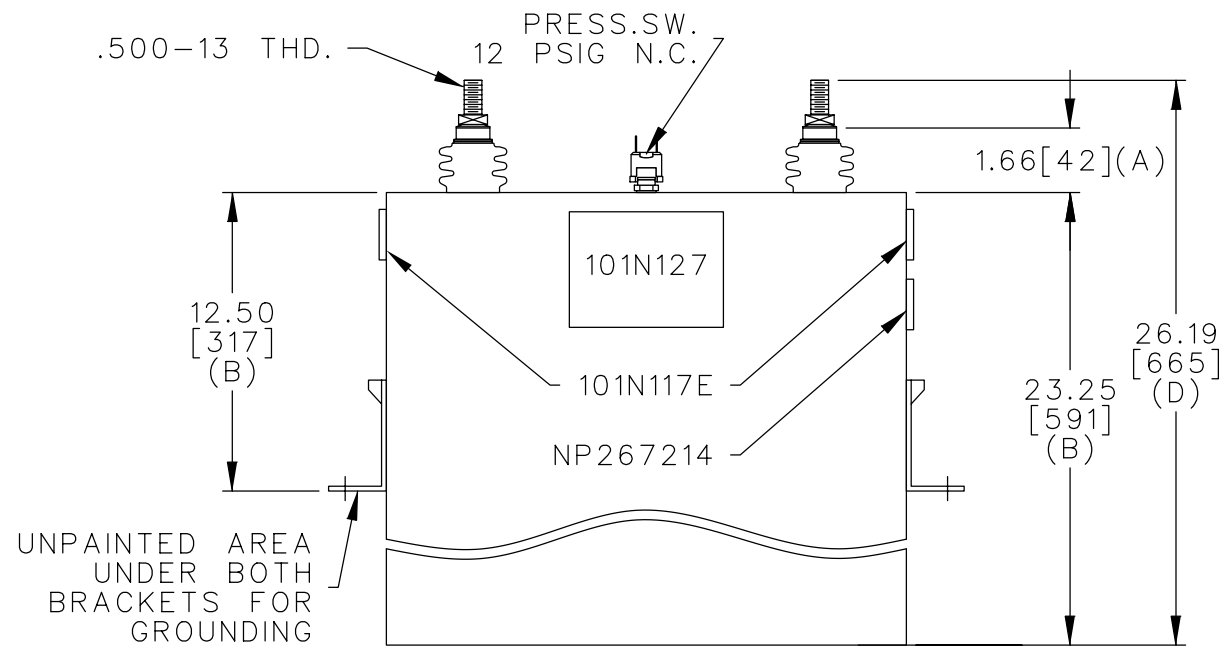

WITH INTERNAL DISCH RESISTORS
 CAT. 16L0546TH4 SN
 200KVAR 600V 60HZ 1PH
 2 x 736.8 UF
 2.3 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2743
 MADE IN MEXICO
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	FSCM NO	OUTLINE 16L0546TH4	DISTR TO
	DRAWN E.McGINN	JULY 21, 1999	SCALE	SHEET 2		
ISSUED	7-28-99					