



TOL	+/-	BUSH DIA
A	.06	1.75(A)
B	.12	
C	.18	
D	.50	
E	.04	

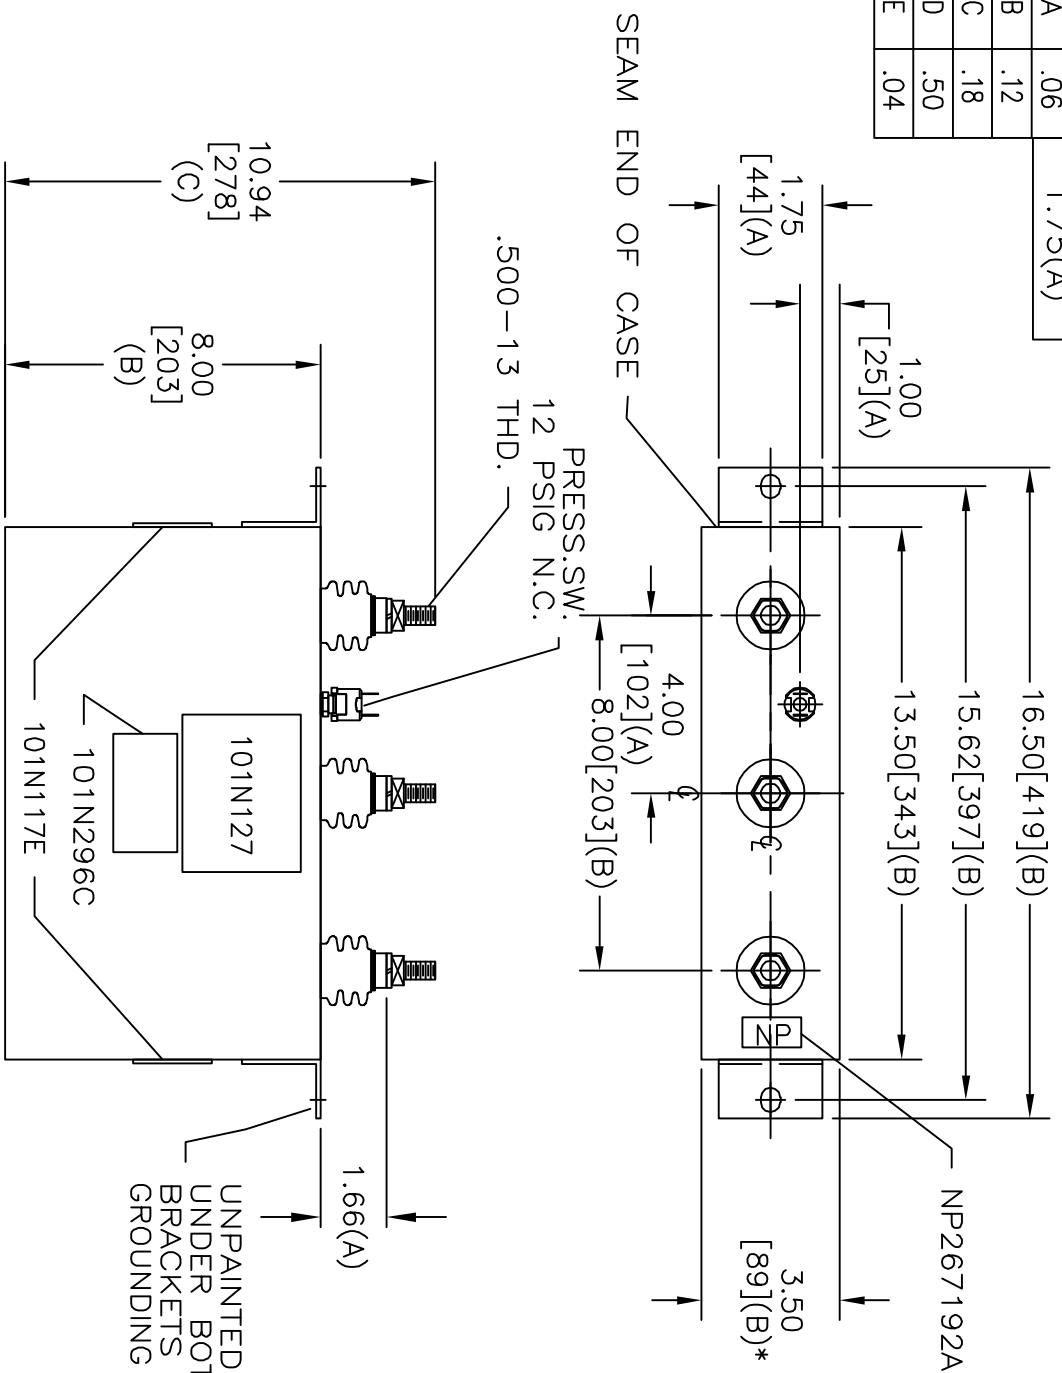

SIZE	DWG NO	SHT	REV
A	16L1522TH4	2	1
REV	DESCRIPTION	DATE	APPROVED
1	CHG NP	5-18-05	EJM

UNPAINTED AREA UNDER BOTH BRACKETS FOR GROUNDING

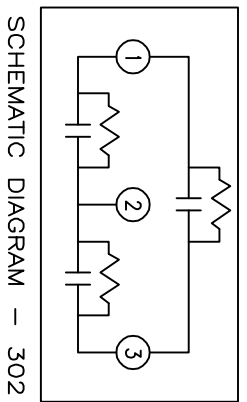

POWER FACTOR CORRECTION
 WITH INTERNAL DISCHARGE RESISTORS
 CAT. 16L1522TH4 SN
 25KVAR 240V 60HZ 3PH
 DELTA CONN
 CONTAINS .79 GAL. COMBUSTIBLE LIQUID WITH LESS THAN ONE PART PER MILLION PCB ON MFG DATE MM/YY
 CAUTION! BEFORE INSTALLING OR OPERATING READ GEH-2743+2741
 101N296C
 MADE IN USA

* UP TO +.50 CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A



INDUSTRIAL SYSTEMS
 FORT EDWARD, N.Y., U.S.A.

DRAWN	E. McGinn	DATE	9-6-01
ISSUED		DATE	9-12-01

SIZE A SCALE

OUTLINE
 16L1522TH4
 SHEET 2 CONT ON 3