



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

BUSH DIA
1.75(A)

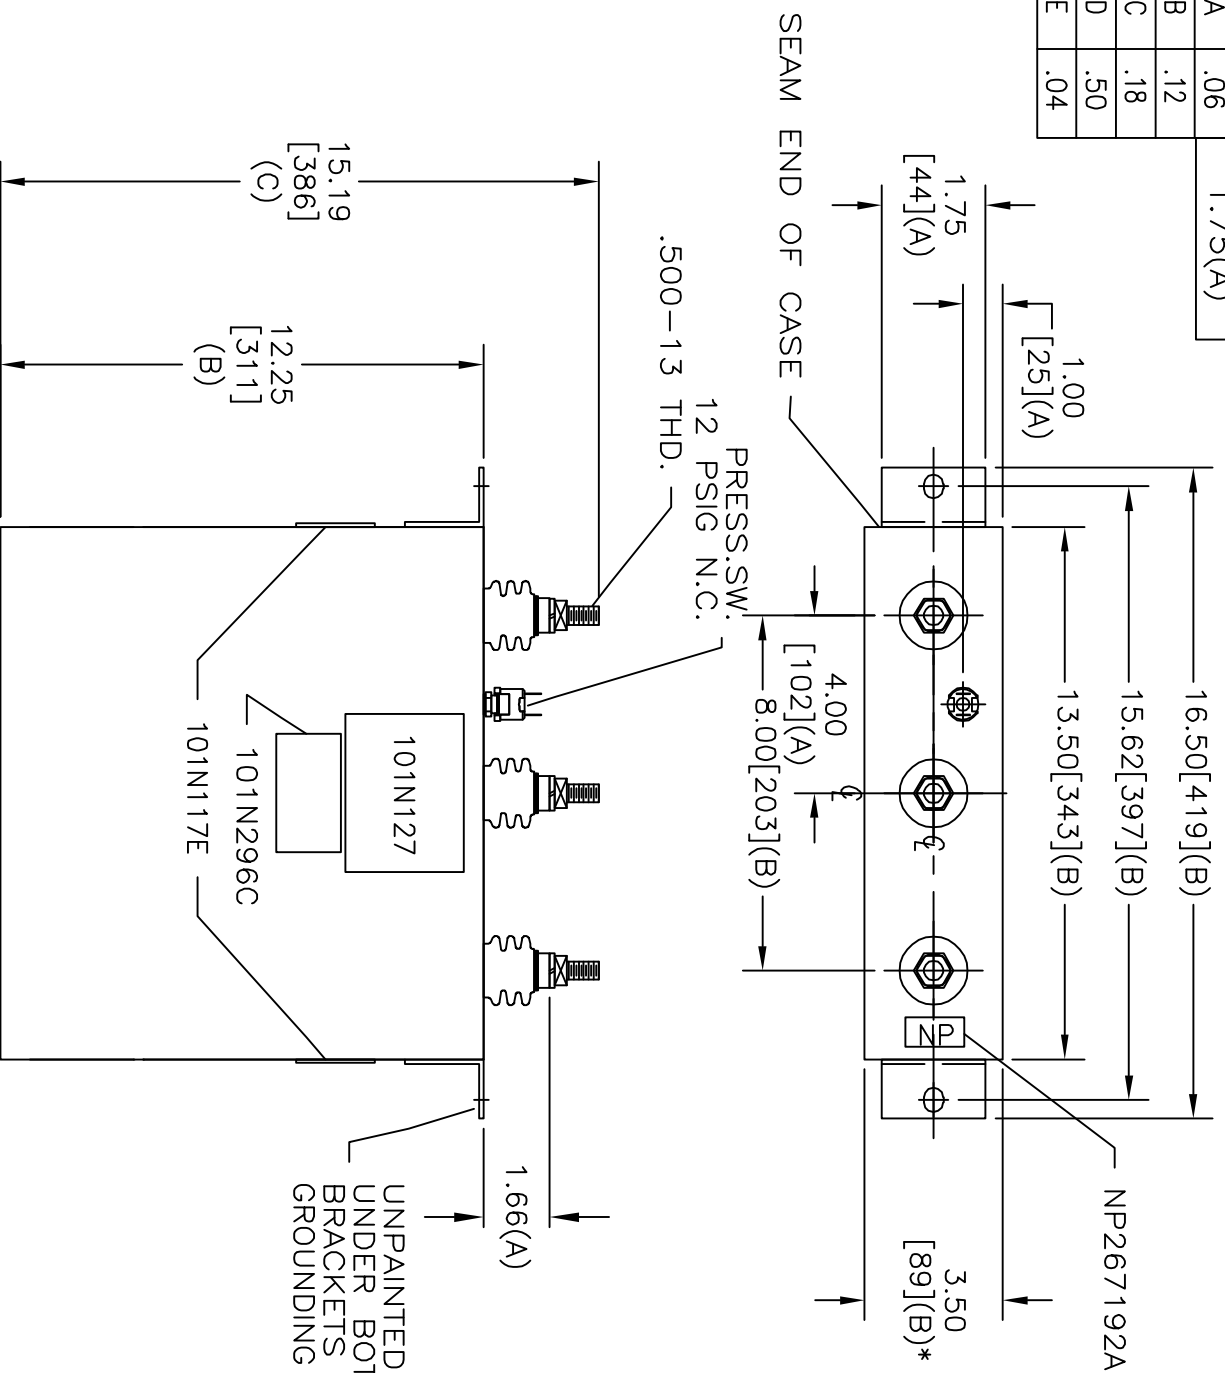

SIZE	DWG NO	SHT	REV
A	16L1525TH4	2	1
REV	DESCRIPTION	DATE	APPROVED
1	CHG NP	5-18-05	EJM

UNPAINTED AREA
UNDER BOTH
BRACKETS FOR
GROUNDING

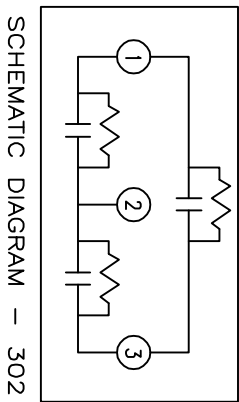

SCHEMATIC DIAGRAM - 302

POWER FACTOR CORRECTION
WITH INTERNAL DISCHARGE RESISTORS
CAT. 16L1525TH4 SN
50KVAR 240V 60HZ 3PH
DELTA CONN
CONTAINS .89 GAL. COMBUSTIBLE LIQUID WITH LESS THAN
ONE PART PER MILLION PCB ON MFG DATE M/M/Y
CAUTION! BEFORE INSTALLING OR OPERATING READ GEH-2743+2741
101N296C



MADE IN USA

* UP TO +.50
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

INDUSTRIAL SYSTEMS
FORT EDWARD, N.Y., U.S.A.

DRAWN	B. ROSS	DATE	10-14-02
ISSUED		DATE	10-16-02

SIZE
SCALE
A

OUTLINE
16L1525TH4

SHEET	2	CONT	3
ON			