



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

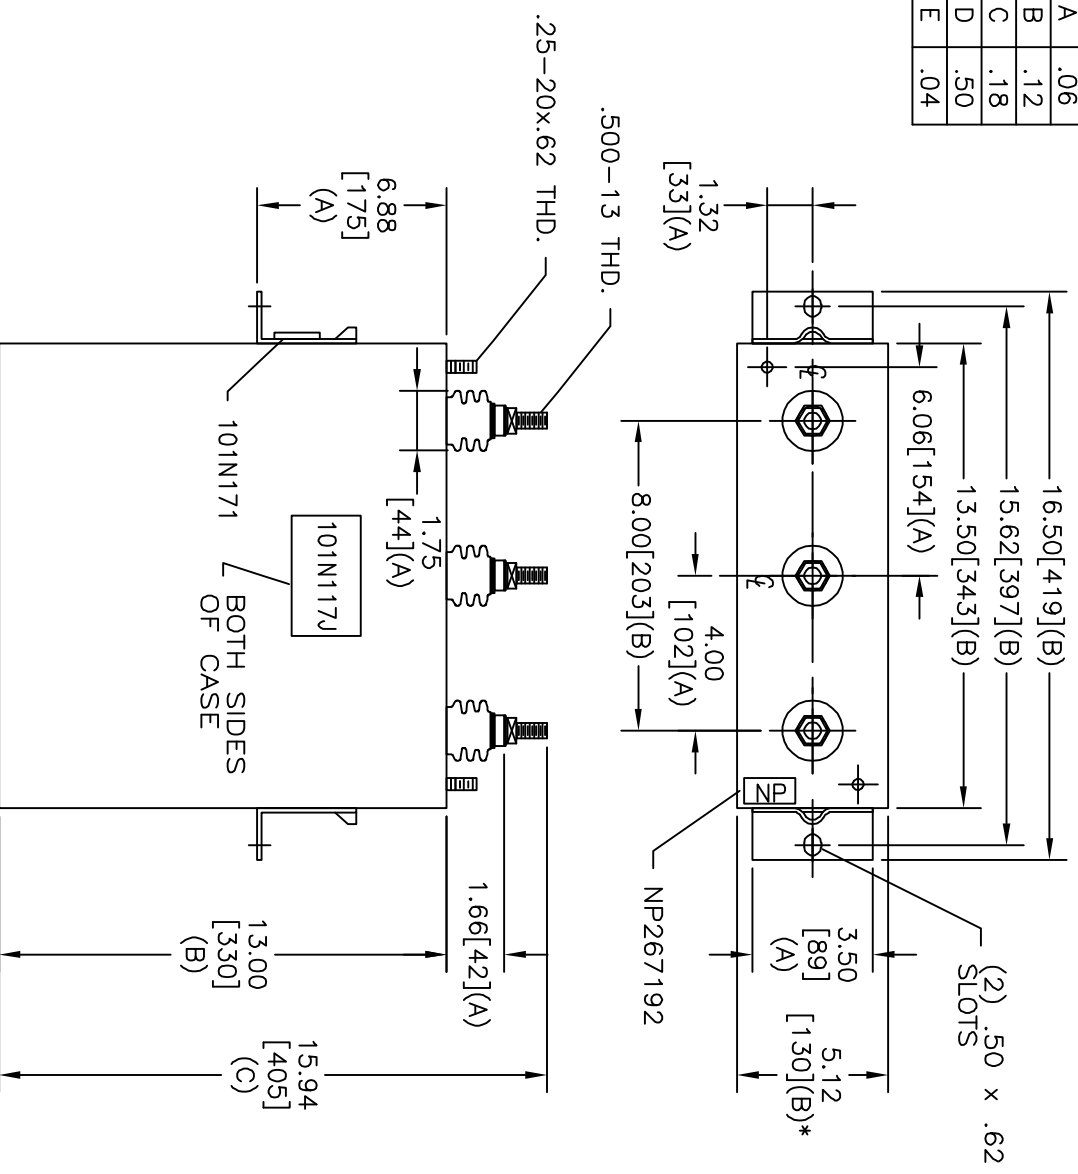

\* UP TO +.50  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS  
NP267192A

SIZE	DWG. NO.	SHT	REV
A	16L0332WH3	2	
REV	DESCRIPTION	DATE	APPROVED
			BTR



SCHEMATIC DIAGRAM - 302

750V 3 PH DELTA 30 KVBL  
75 KVAR 60 HZ  
CAT 16L0332WH3 SN  
1.39 GAL. MFG DATE  
101N171 READ GEH-2743

<b>INDUSTRIAL SYSTEMS</b> FORT EDWARD, N.Y., U.S.A.		DATE	4/14/04
		DATE	APR 12, 2004
ISSUED	B. ROSS	DATE	4/14/04

SIZE	A
SCALE	
<h1>OUTLINE</h1> <h2>16L0332WH3</h2>	
SHEET	2
CONT	3

DISTR. TO