



|     |     |             |
|-----|-----|-------------|
| TOL | +/- | BUSH. DIA.  |
| A   | .06 | 1.75[44](B) |
| B   | .12 |             |
| C   | .18 |             |
| D   | .50 |             |
| E   | .04 |             |

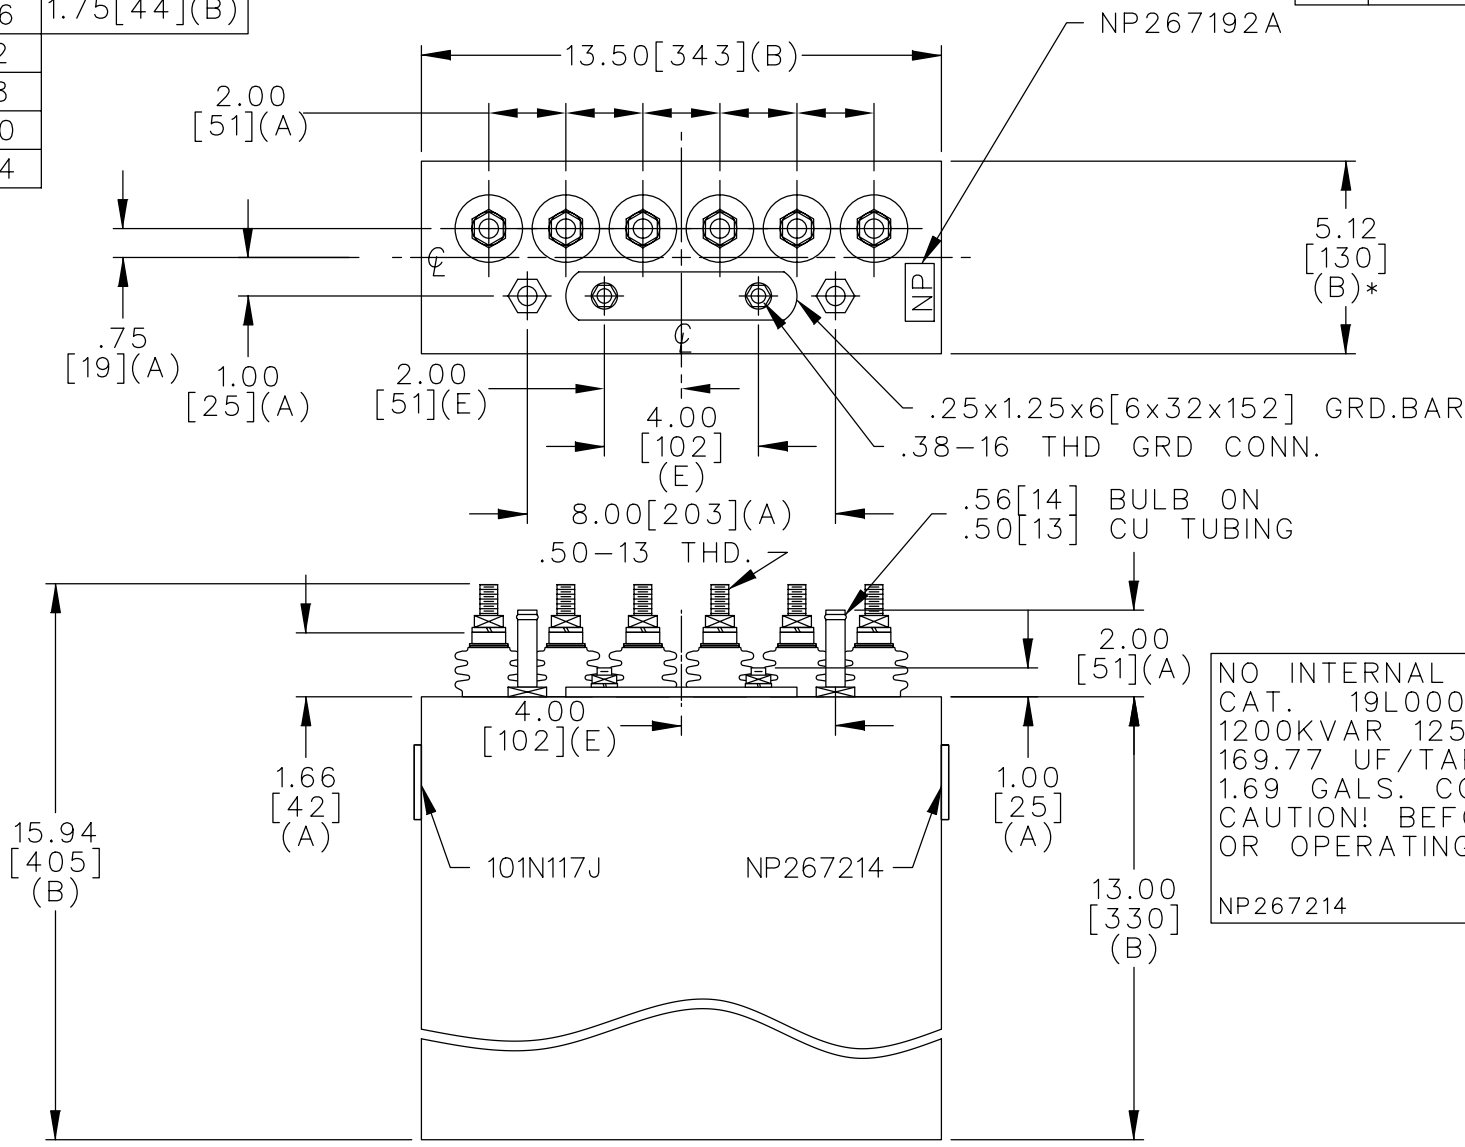

| TERM | uF | kVAR |
|------|----|------|
| 1    | 17 | 200  |
| 2    | 17 | 200  |
| 3    | 17 | 200  |
| 4    | 17 | 200  |
| 5    | 17 | 200  |
| 6    | 17 | 200  |

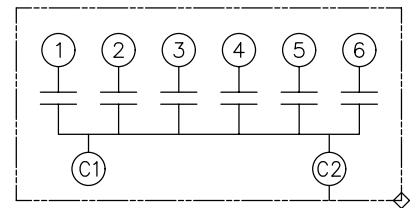

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0006WH9 SN  
 1200KVAR 1250V 1200HZ 1PH  
 169.77 UF/TAP  
 1.69 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING  
 OR OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

|        |   |                |                  |                       |  |
|--------|---|----------------|------------------|-----------------------|--|
|        | CAPACITOR & POWER PROTECTION<br>FORT EDWARD, N.Y., U.S.A. |                | SIZE<br><b>A</b> | OUTLINE<br>19L0006WH9 |  |
|        | DRAWN E.McGINN  | SEPT. 26, 2001 | SCALE            |                       |  |
| ISSUED | SHEET 2 CONT. ON -  |                | DISTR TO         |                       |  |