



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

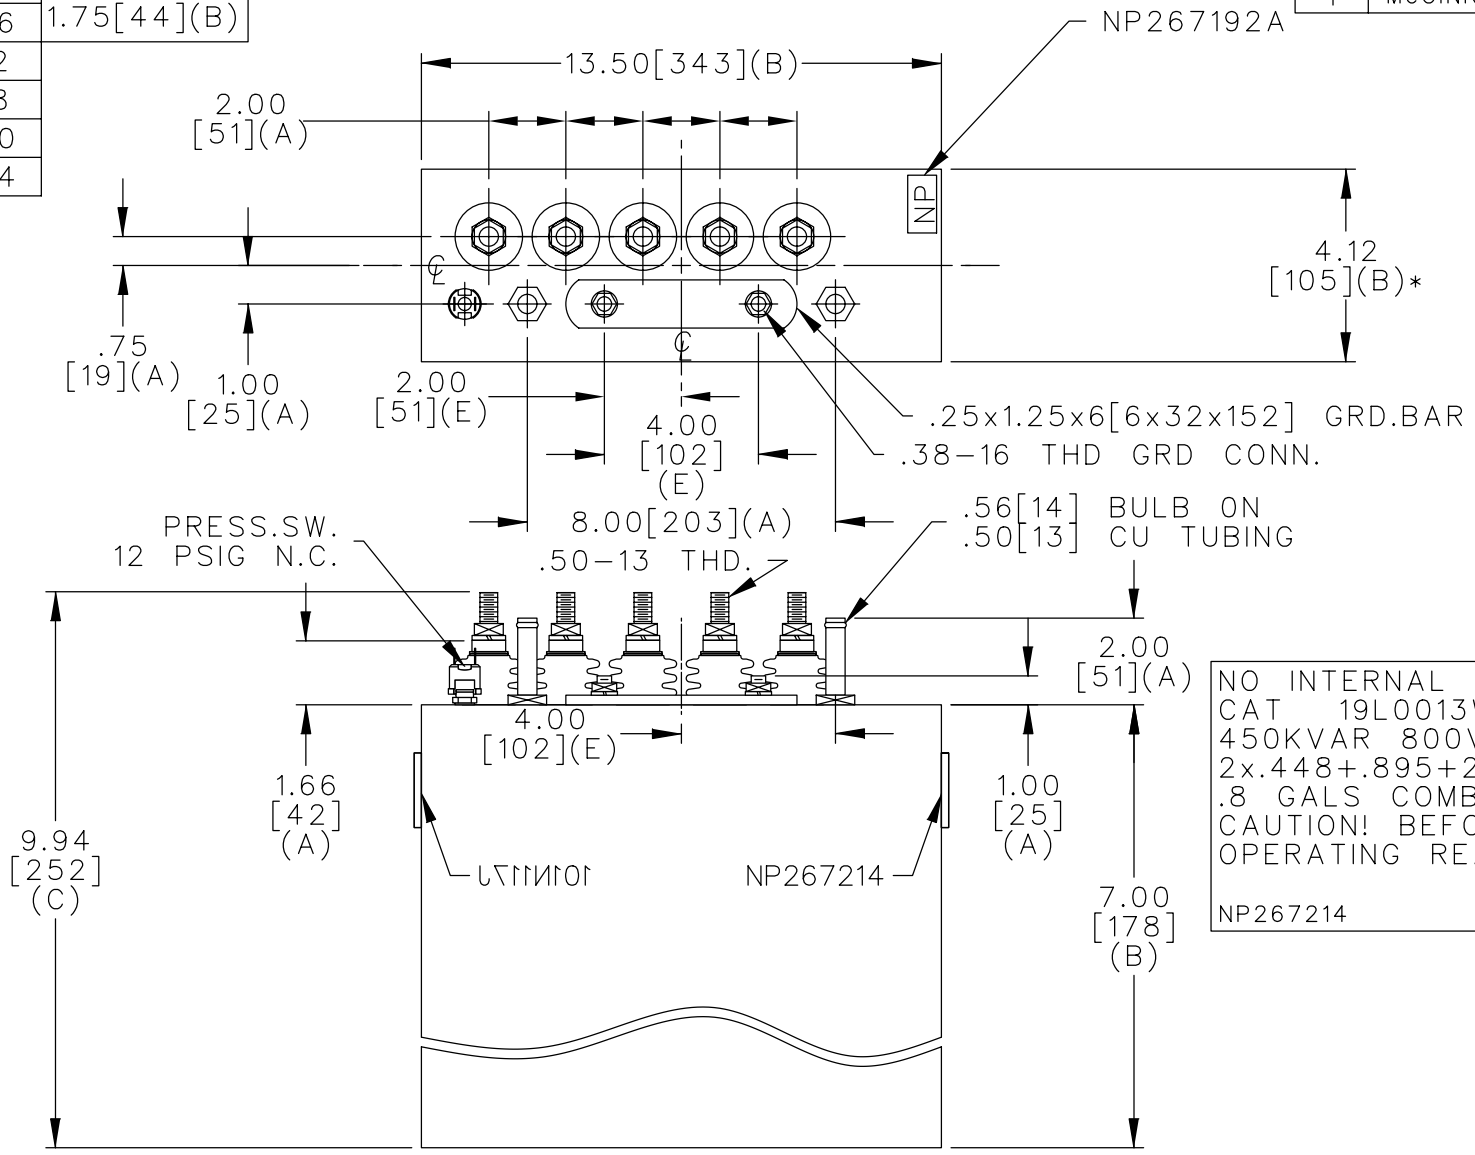

TERM	uF	kVAR
1	0.448	45
2	0.448	45
3	0.895	90
4	1.343	135
5	1.343	135

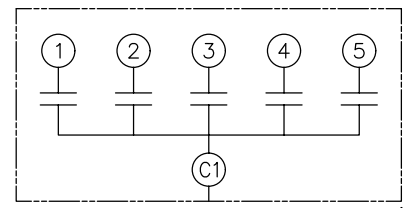

SCHEMATIC DIAGRAM - 501

NO INTERNAL DISCH RESISTORS  
 CAT 19L0013WH2 SN  
 450KVAR 800V 25000HZ 1PH  
 2x.448+.895+2x1.343 UF/TAP  
 .8 GALS COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0013WH2	
	DRAWN E.McGINN	JAN. 29, 1999	SCALE		
ISSUED	2-3-99	SHEET 2	CONT. ON -	DISTR TO	