



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

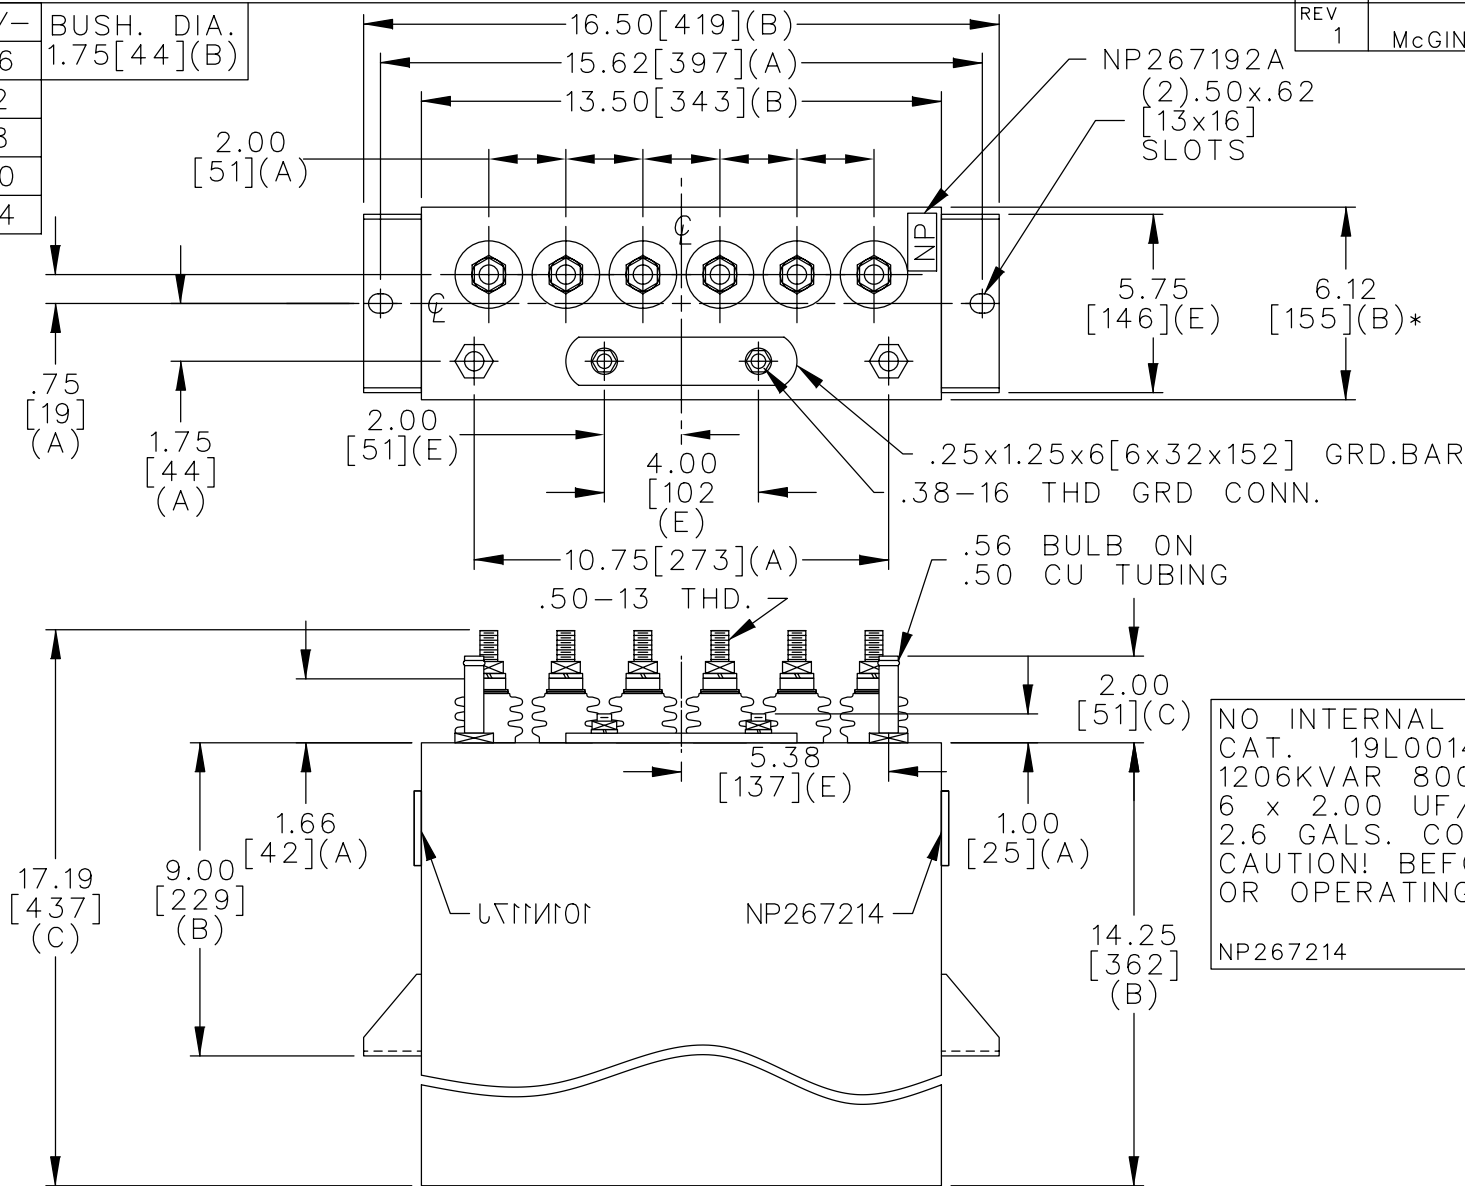

TERM	uF	kVAR
1	2.00	201
2	2.00	201
3	2.00	201
4	2.00	201
5	2.00	201
6	2.00	201

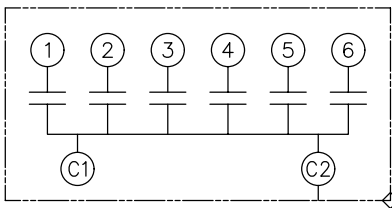

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0014WH3 SN
 1206KVAR 800V 25000HZ 1PH
 6 x 2.00 UF/TAP
 2.6 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1>OUTLINE</h1> <h2>19L0014WH3</h2>		SHEET 2 CONT. ON -
	DRAWN E.McGINN JULY 2, 1999	ISSUED 7-14-99	SCALE			