




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

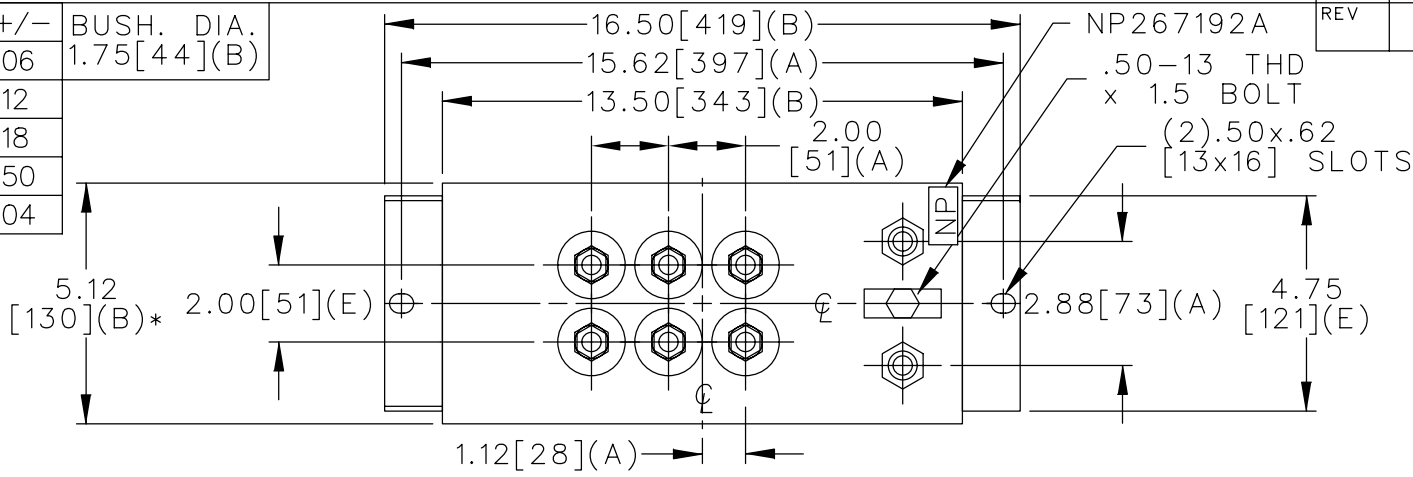

TERM	uF	kVAR
1	36.86	177.83
2	36.86	177.83
3	36.86	177.83
4	36.86	177.83
5	36.86	177.83
6	36.86	177.83

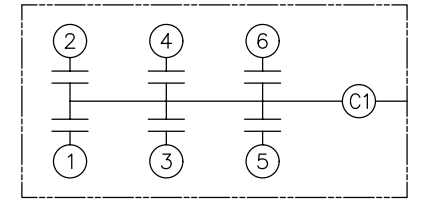

SCHEMATIC DIAGRAM - 606

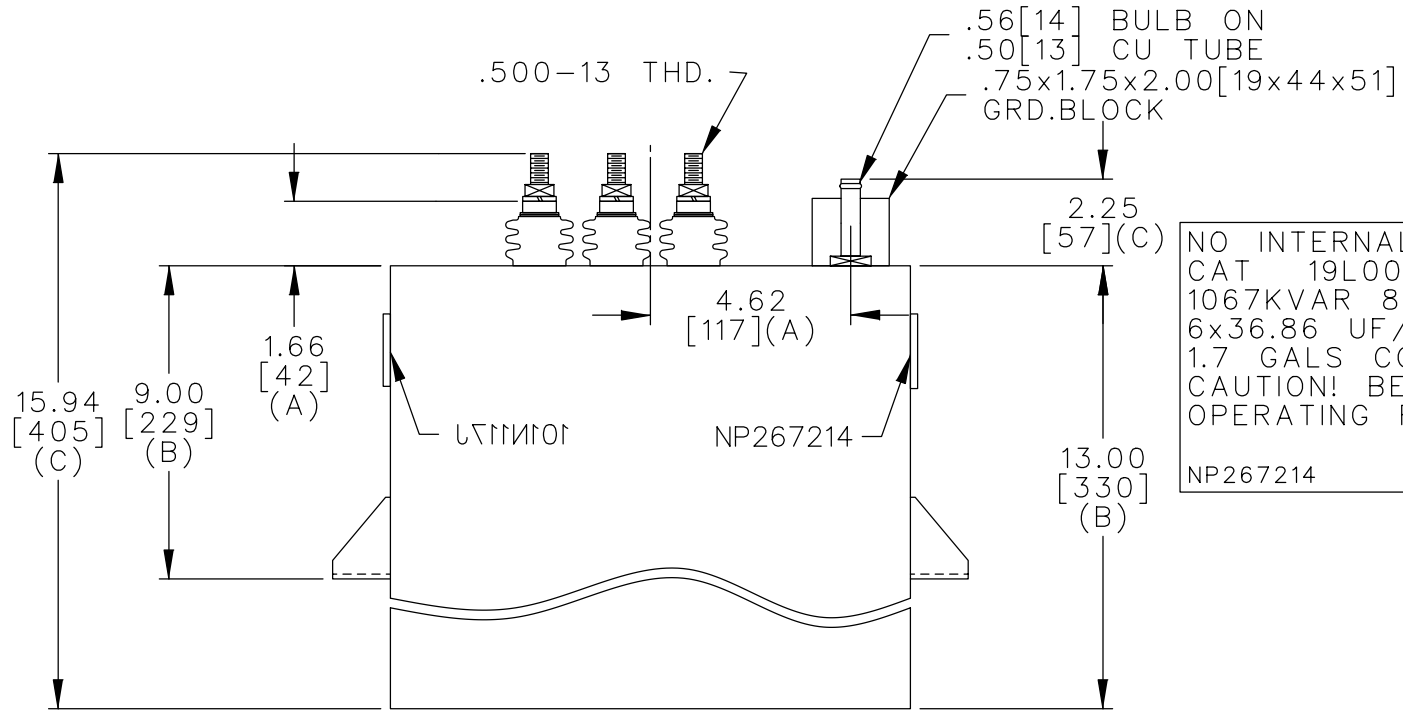

NO INTERNAL DISCH RESISTORS  
 CAT 19L0020WH3 SN  
 1067KVAR 800V 1200HZ 1PH  
 6x36.86 UF/TAP  
 1.7 GALS COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0020WH3	
	DRAWN E.McGINN	MAY 2, 2001	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO