

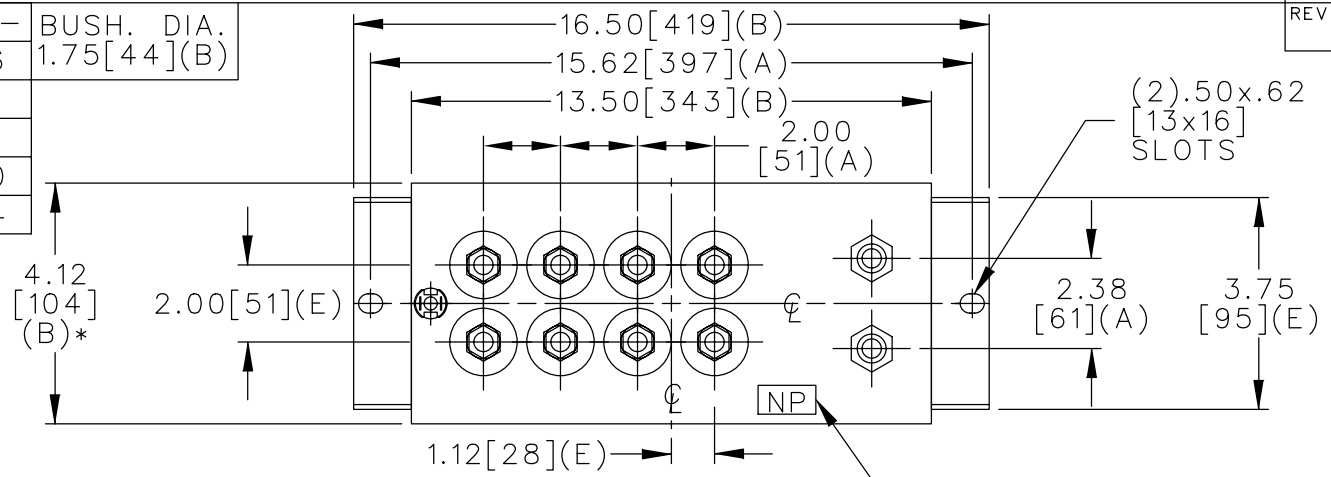


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

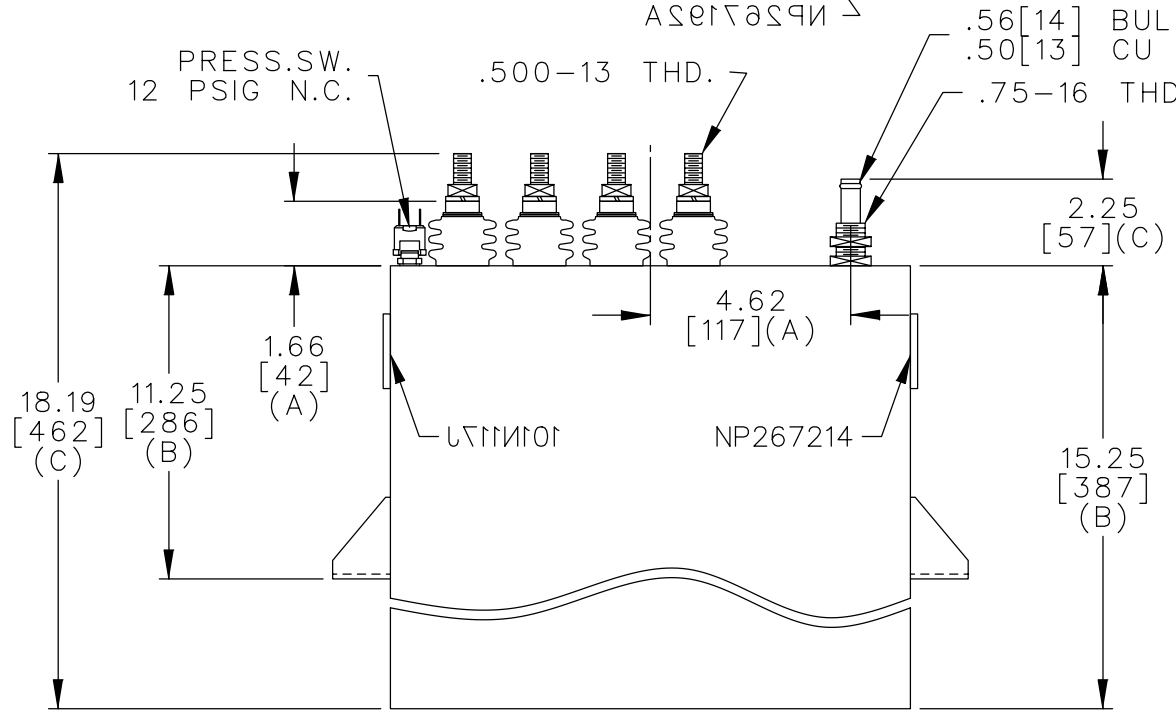

TERM	uF	kVAR
1	5.31	750
2	5.31	750
3	5.31	750
4	5.31	750

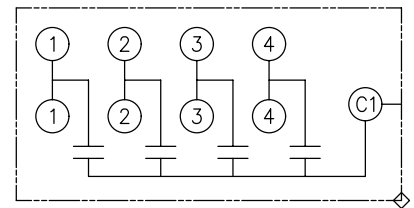

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0041WH4 SN  
 3000KVAR 1500V 10KHZ 1PH  
 4 x 5.31 uF/TAP  
 1.6 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING  
 OR OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0041WH4</b>	SHEET 2 CONT. ON
	DRAWN E.McGINN	SEPT. 24, 1997	SCALE		
ISSUED	9-24-97	DISTR TO			