

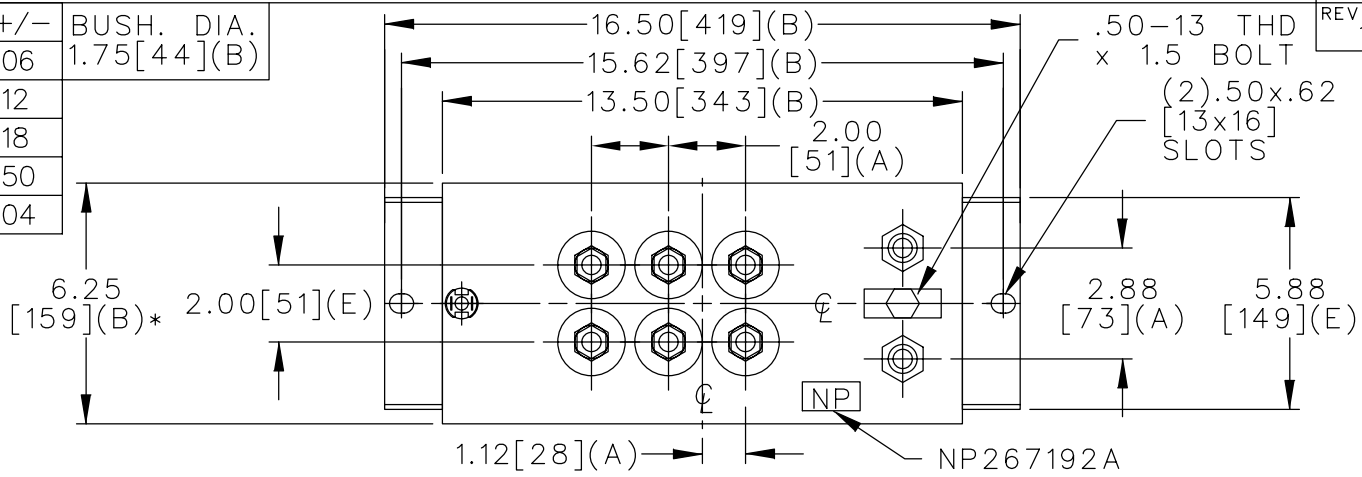


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

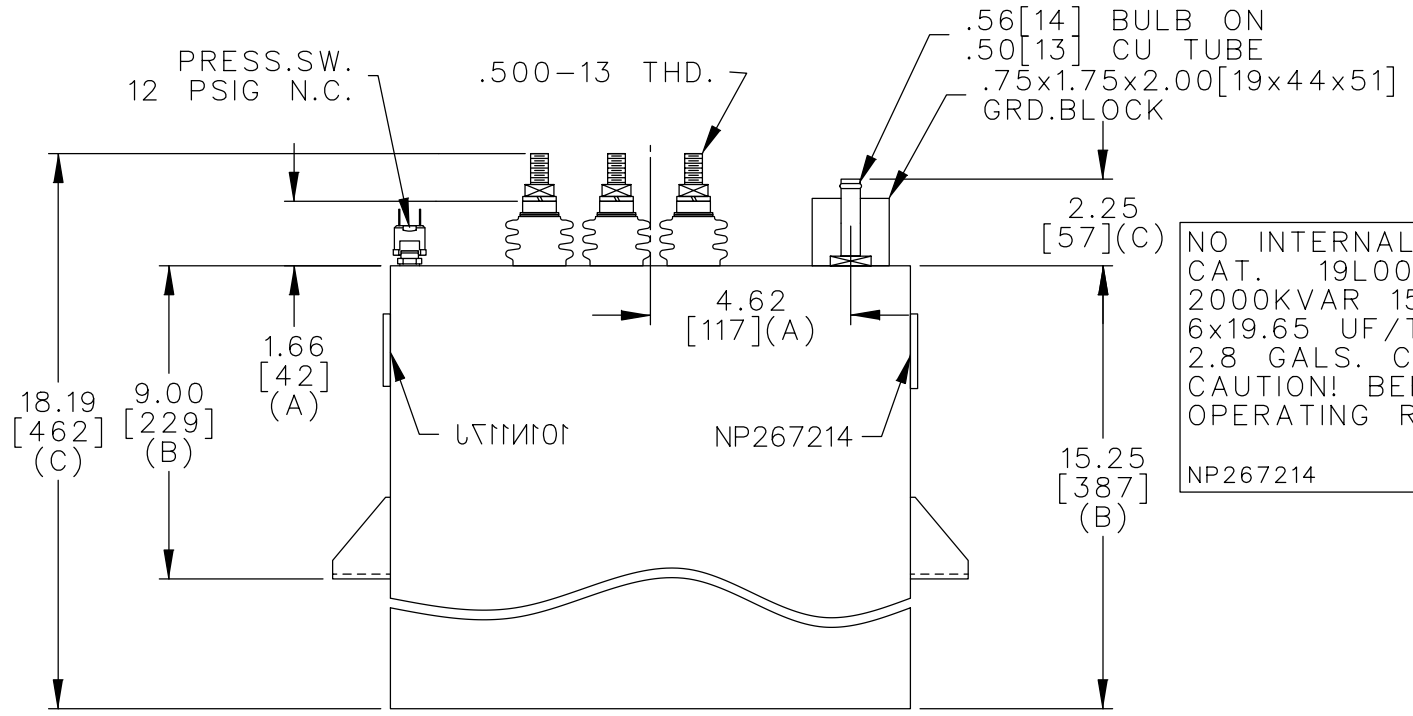

TERM	uF	kVAR
1	19.65	333.3
2	19.65	333.3
3	19.65	333.3
4	19.65	333.3
5	19.65	333.3
6	19.65	333.3

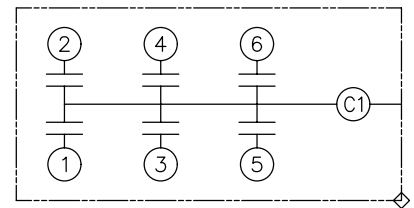

NO INTERNAL DISCH RESISTORS
 CAT. 19L0055WH4 SN
 2000KVAR 1500V 1200HZ 1PH
 6x19.65 UF/TAP
 2.8 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0055WH4		SHEET 2 CONT. ON 3
	DRAWN E.McGINN	JUNE 18, 1997	SCALE			
ISSUED 6-25-97						

DISTR TO