



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

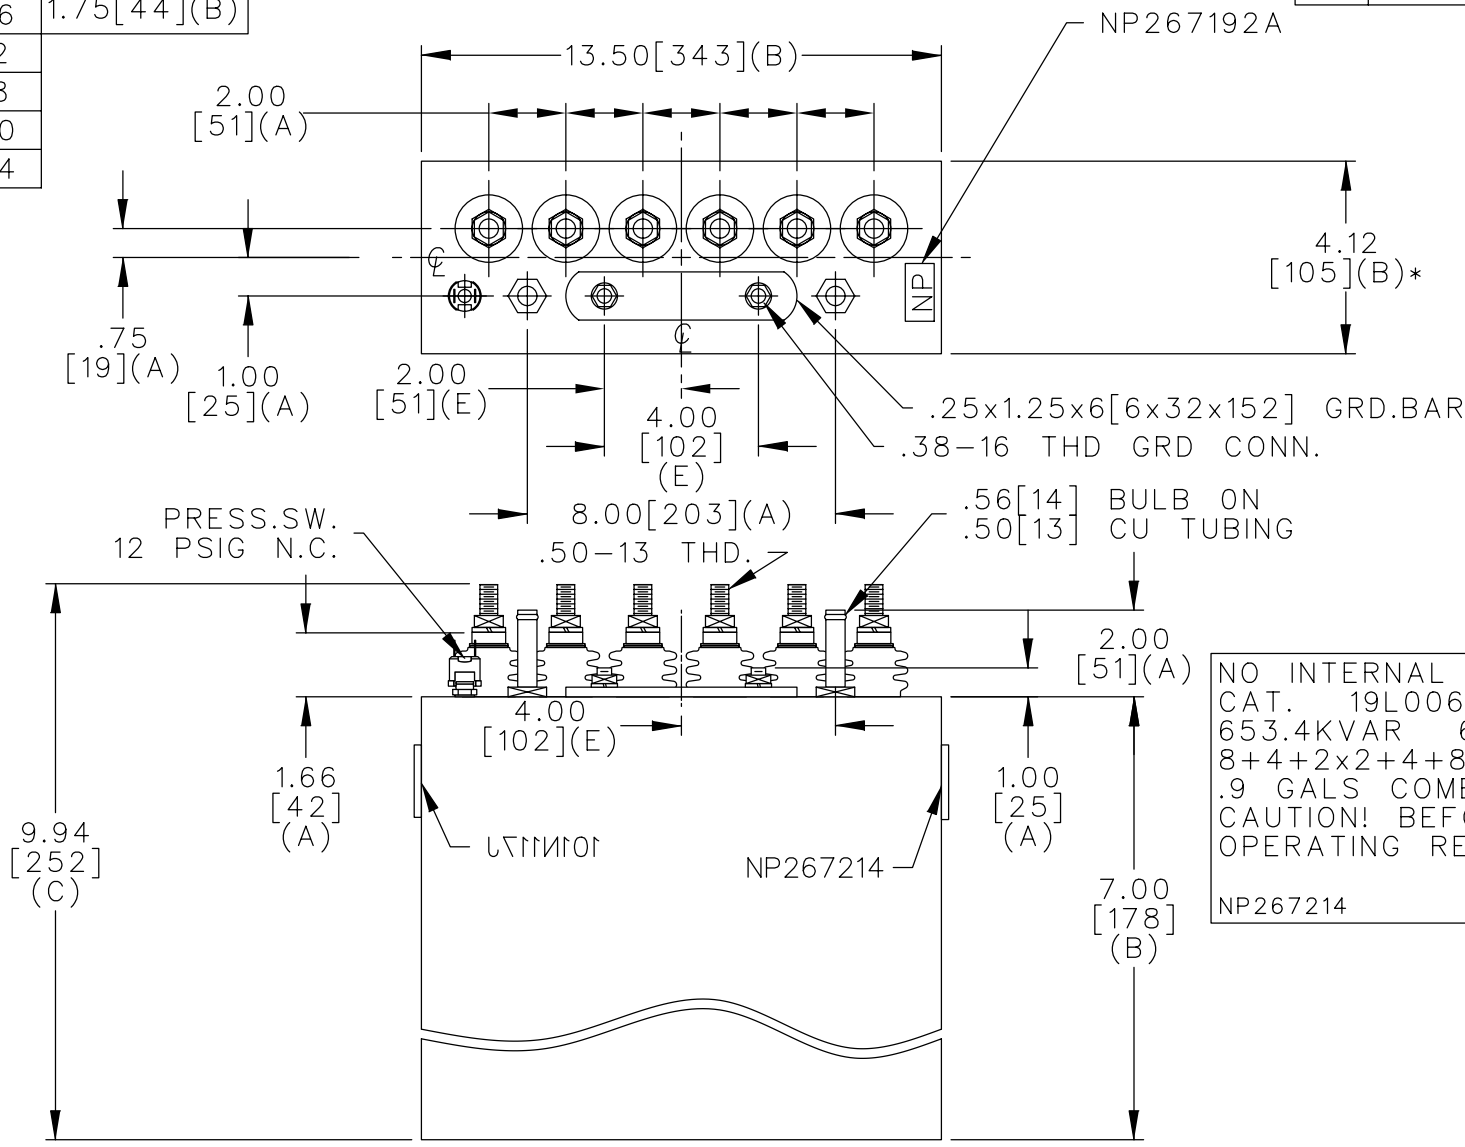

TERM	uF	kVAR
1	8	186.6
2	4	93.3
3	2	46.6
4	2	46.6
5	4	93.3
6	8	186.6

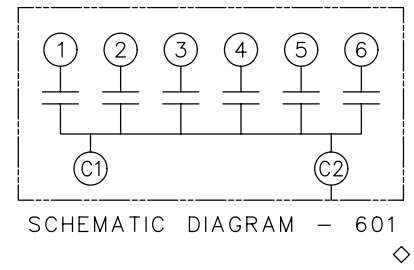

NO INTERNAL DISCH RESISTOR  
 CAT. 19L0061WH2 SN  
 653.4KVAR 622V 9600HZ 1PH  
 8+4+2x2+4+8 UF/TAP  
 .9 GALS COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0061WH2</b>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	DEC. 14, 1998	SCALE		
ISSUED					