



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

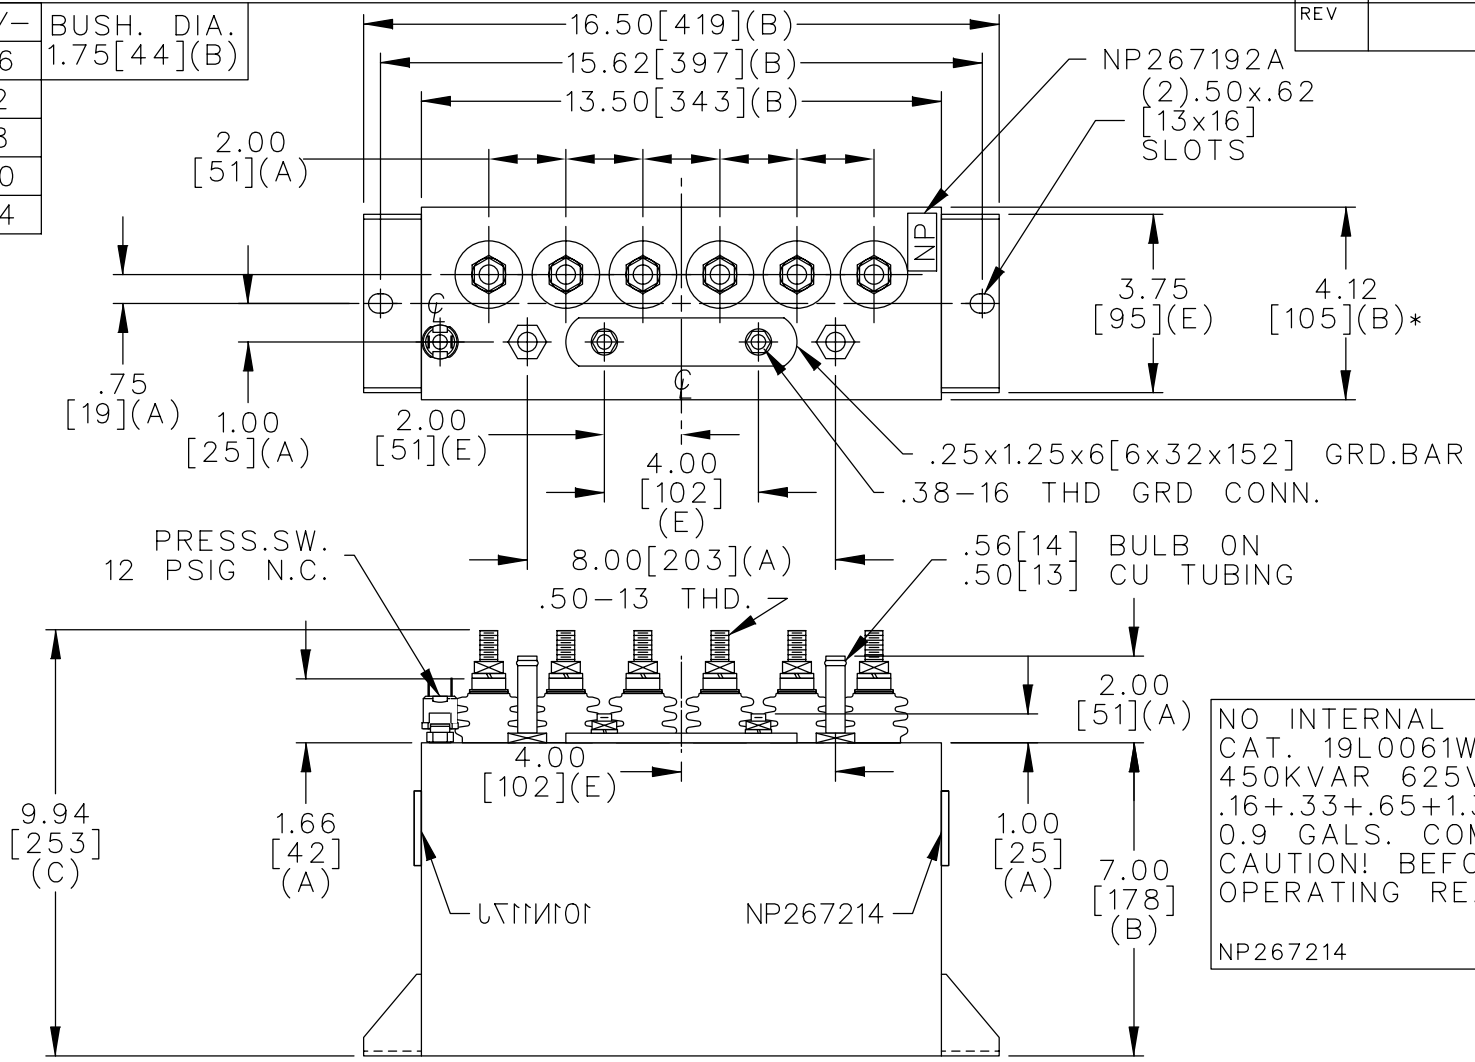

TERM	uF	kVAR
1	8	186.6
2	4	93.3
3	2	46.6
4	2	46.6
5	4	93.3
6	8	186.6

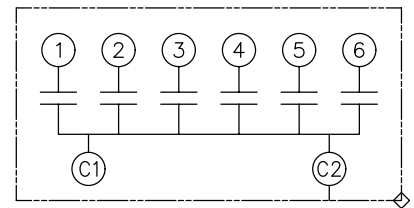

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0061WH4 SN
 450KVAR 625V 25000HZ 1PH
 .16+.33+.65+1.3+2x2.4 UF/TAP
 0.9 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0061WH4	
	DRAWN E.McGINN	DEC. 23, 1998	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO