



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

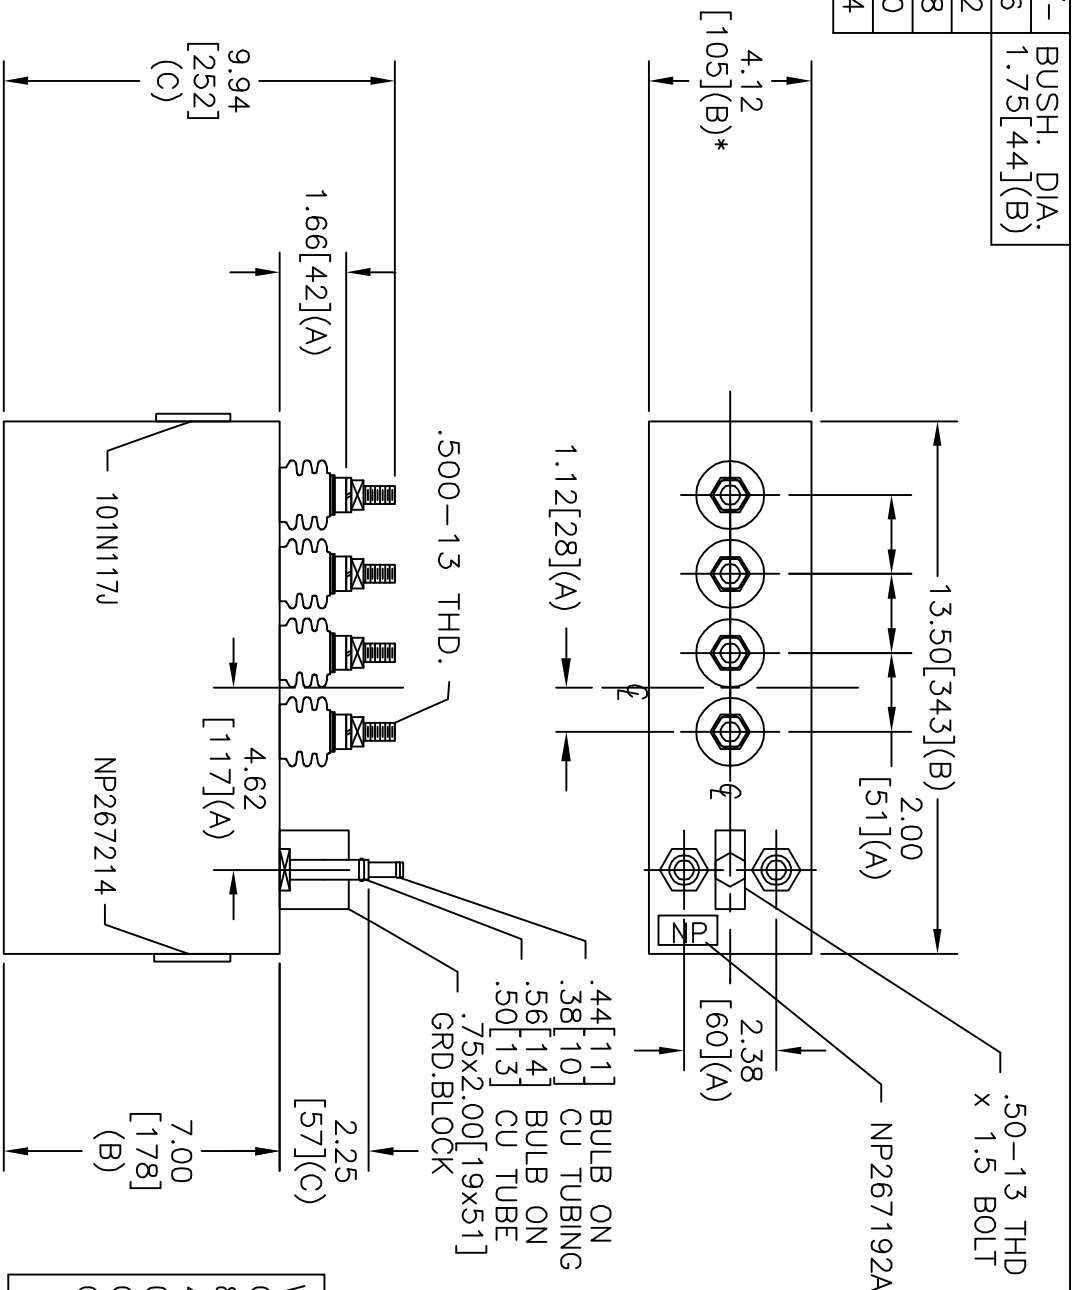

SIZE	DWG NO	SHT	REV
A	19L0063WH1	2	1
REV	DESCRIPTION	DATE	APPROVED
1	UPDATE CAT NO.	5/25/05	BTR

TERM	UF	KVAR
1	13.34	200
2	13.34	200
3	13.34	200
4	13.34	200

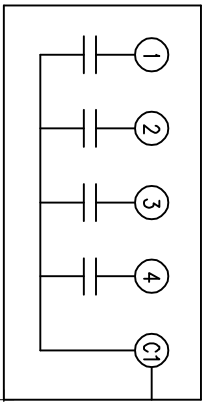

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0063WH1 SN
 800KVAR 940V 2700HZ PH
 4X13.34 UF/TAP
 0.87 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

		INDUSTRIAL SYSTEMS		SCALE	SHEET	CONT
		FORT EDWARD, N.Y., U.S.A.				
DRAWN	E. McGinn	DATE	DEC 10, 1997		2	ON
ISSUED		DATE	12/10/97			

OUTLINE
 19L0063WH1