

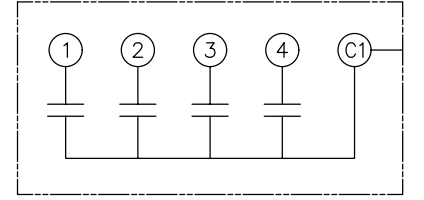


TOL	+/-	BUSH. DIA.
A	.06	1.75(B)
B	.12	
C	.18	
D	.50	
E	.04	

TERM	uF
1	10
2	30
3	60
4	60

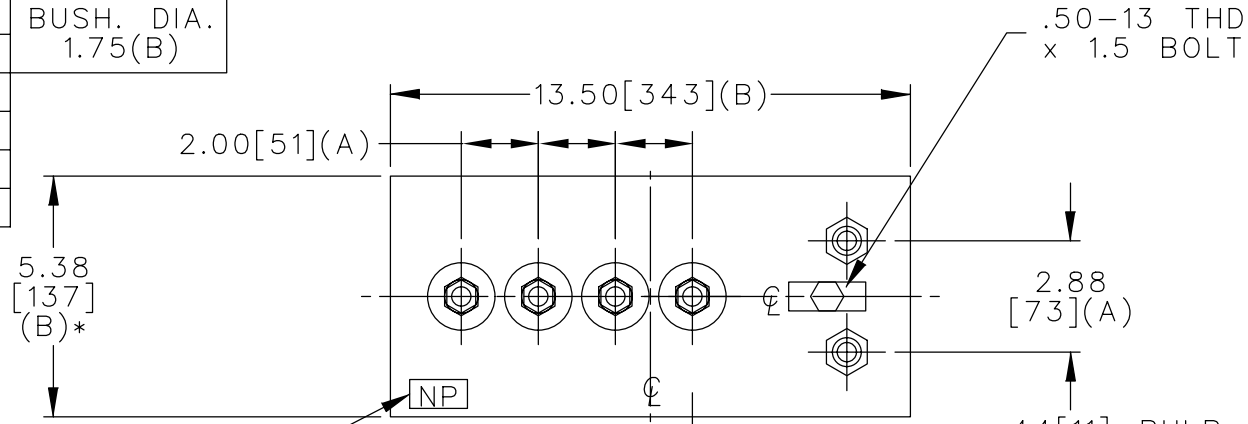

SCHEMATIC DIAGRAM - 401 ◊

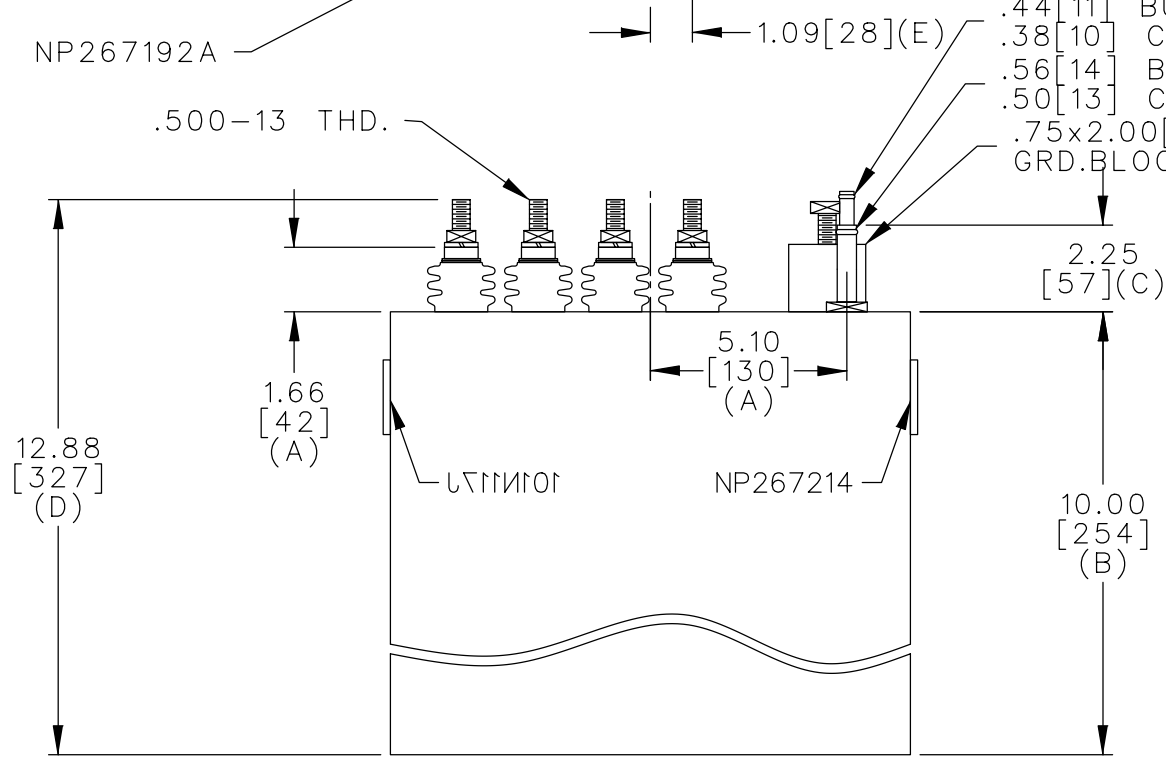

NO INTERNAL DISCH RESISTORS
 CAT. 19L0064WH1 SN
 380 PEAK 160UF 2.7KHZ
 10+30+60+60 UF/TAP
 1.3 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ INSTR. GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0064WH1		SHEET 2	CONT. ON 3
	DRAWN E.McGINN	JUNE 6, 2001	SCALE				
ISSUED							