



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

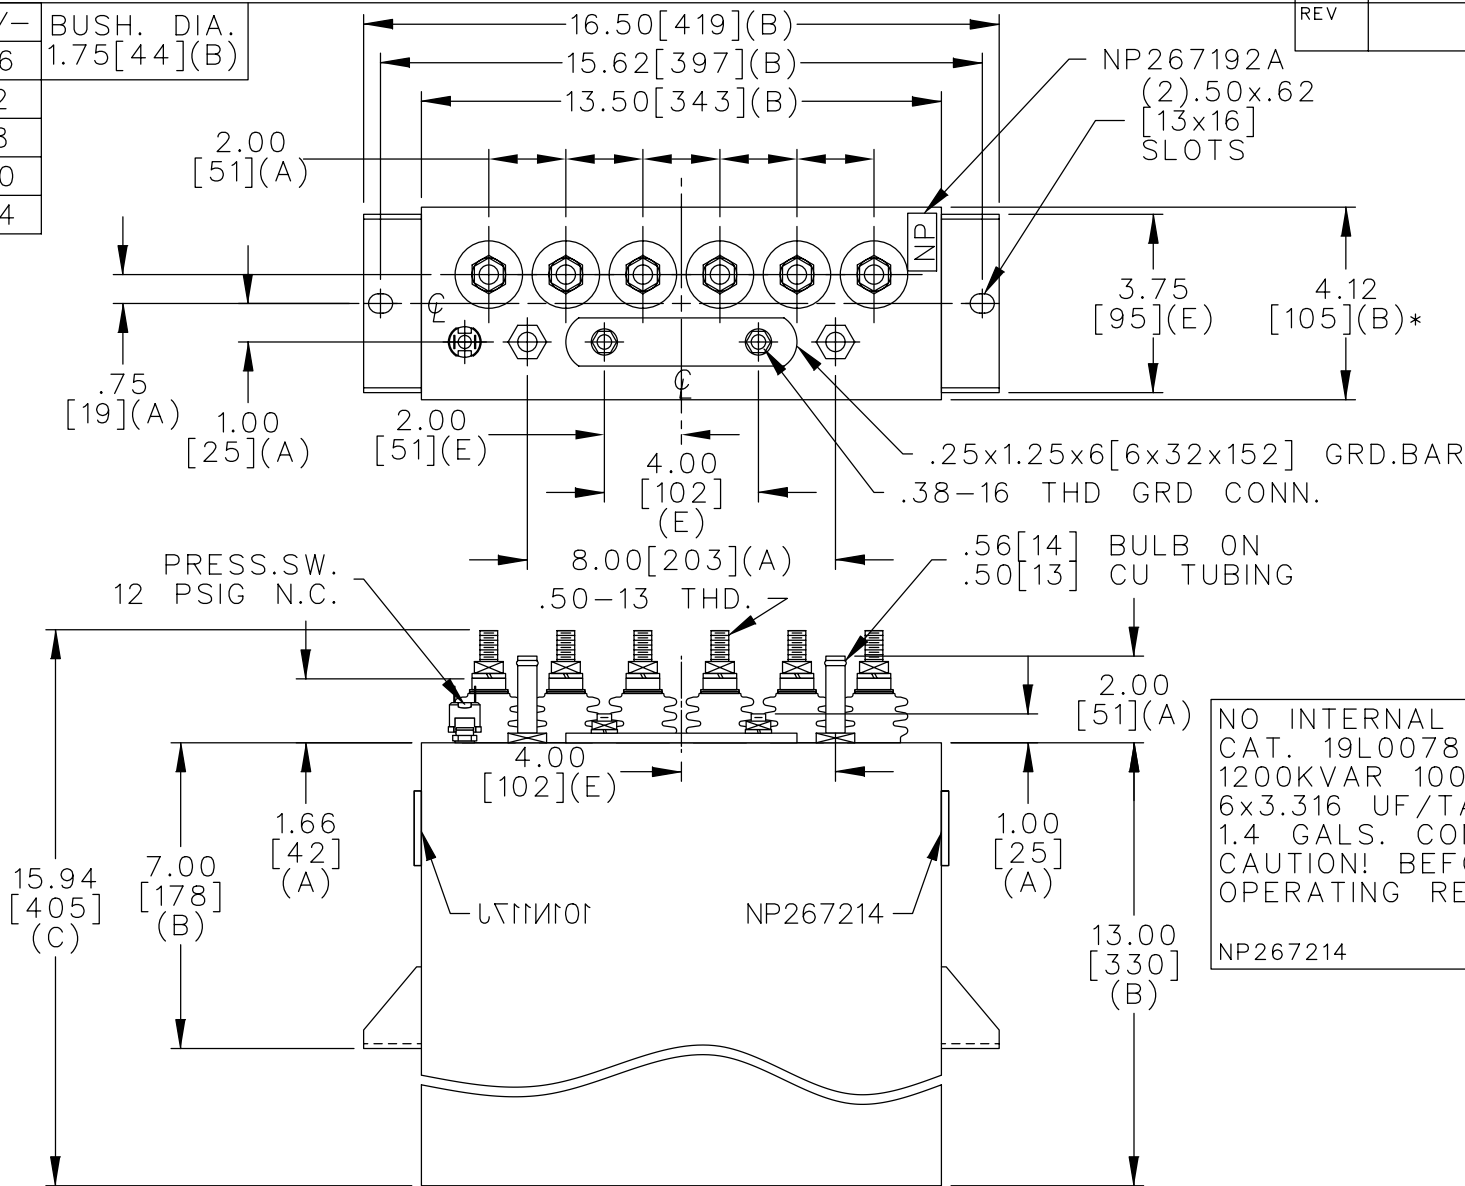

TERM	uF	kVAR
1	3.316	200
2	3.316	200
3	3.316	200
4	3.316	200
5	3.316	200
6	3.316	200

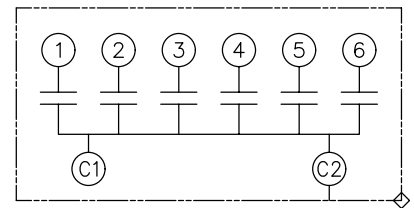

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0078WH4 SN
 1200KVAR 1000V 9600HZ 1PH
 6x3.316 UF/TAP
 1.4 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0078WH4	
	DRAWN E.McGINN	MAY 8, 1998	SCALE		
ISSUED	SHEET 2 CONT. ON -		DISTR TO		