

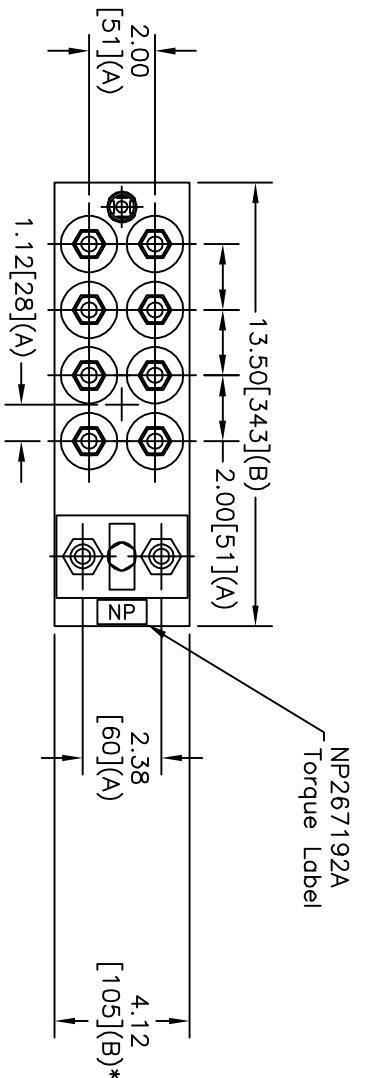



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04
BUSH, DIA.	1.75[.44](B)



TERM	UF	KVAR
1	1.81	22
2	1.81	22
3	3.63	44
4	7.25	88
5	10.88	132
6	10.88	132
7	10.88	132
8	10.88	132

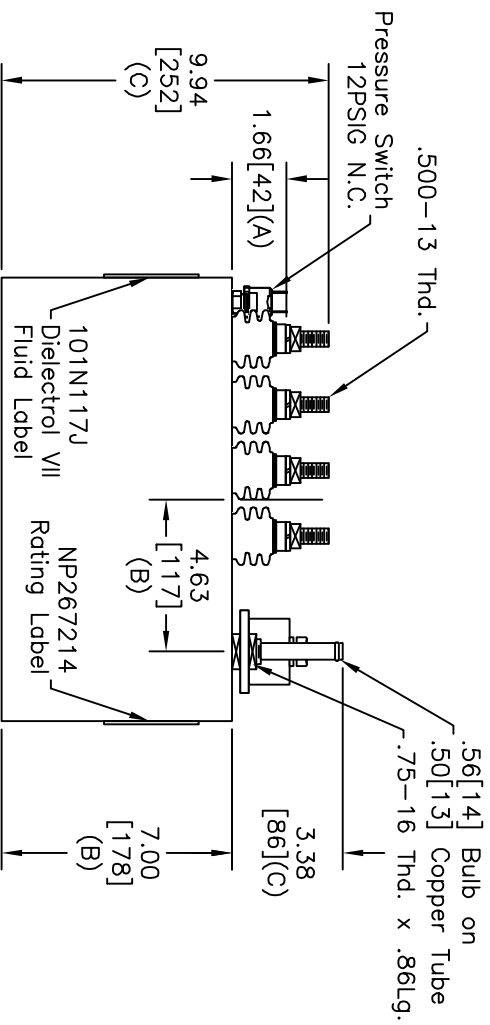

NO INTERNAL DISCH RESISTORS
 CAT. 19L0082WH2 SN
 706KVAR 440V 10000HZ 1PH
 2x1.81+3.63+7.25+4x10.88UF/TAP
 0.8 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 MADE IN USA NP267214

* UP TO +.50[.13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT.-LBS.
 NP267192A

INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.		SIZE	A
		SCALE	
DRAWN	B.ROSS	DATE	9/20/2005
ISSUED		DATE	9/20/2005
OUTLINE 19L0082WH2		SHEET	2
		CONT	ON

SIZE	DWG NO	SHT	REV
A	19L0082WH2	2	0
REV	DESCRIPTION	DATE	APPROVED
0	NEW	9/20/2005	BTR