
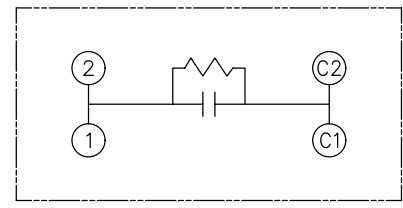


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

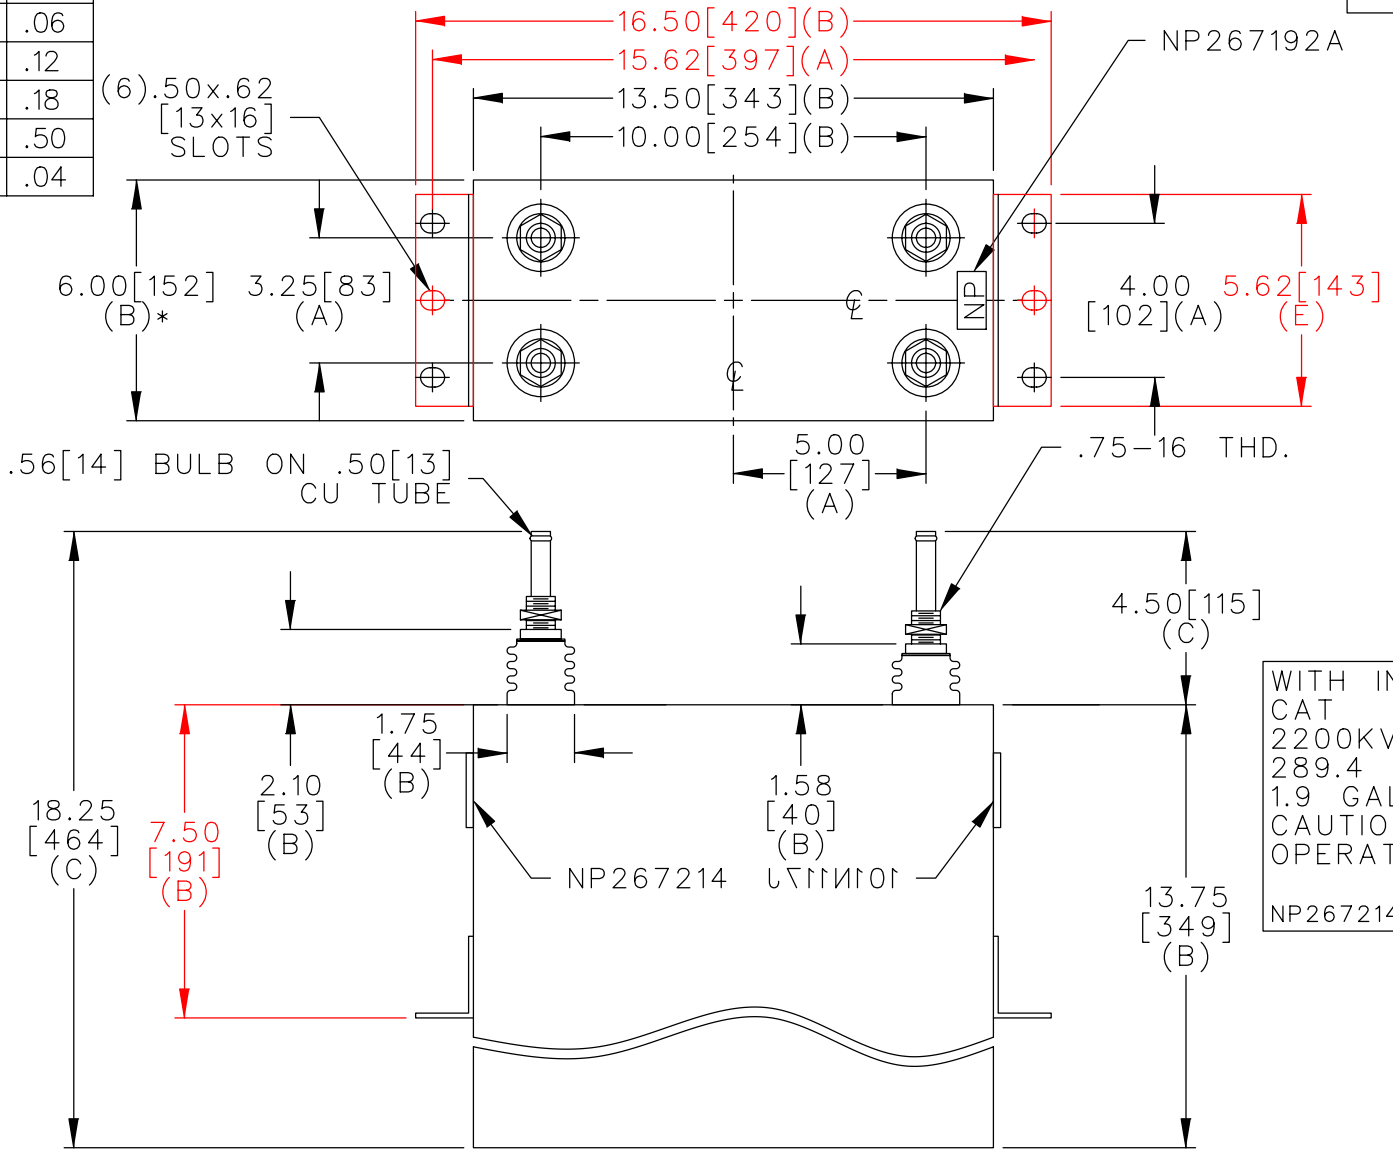

SCHEMATIC DIAGRAM - 107

WITH INTERNAL DISCH RESISTORS
 CAT 19L0095WH3 SN
 2200KVAR 1100V 1000HZ 1PH
 289.4 UF/TAP
 1.9 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	SIZE A	UNIT WEIGHT 62 / 28 LB/KG	OUTLINE 19L0095WH3		DISTR TO
	DRAWN E.McGINN	APR. 11, 1997	SCALE	SHEET 2	CONT. ON 3	
ISSUED	4-16-97					