



TOL	+/-	BUSH. DIA.
A	.06	1.75 [44] (B)
B	.12	
C	.18	
D	.50	
E	.04	

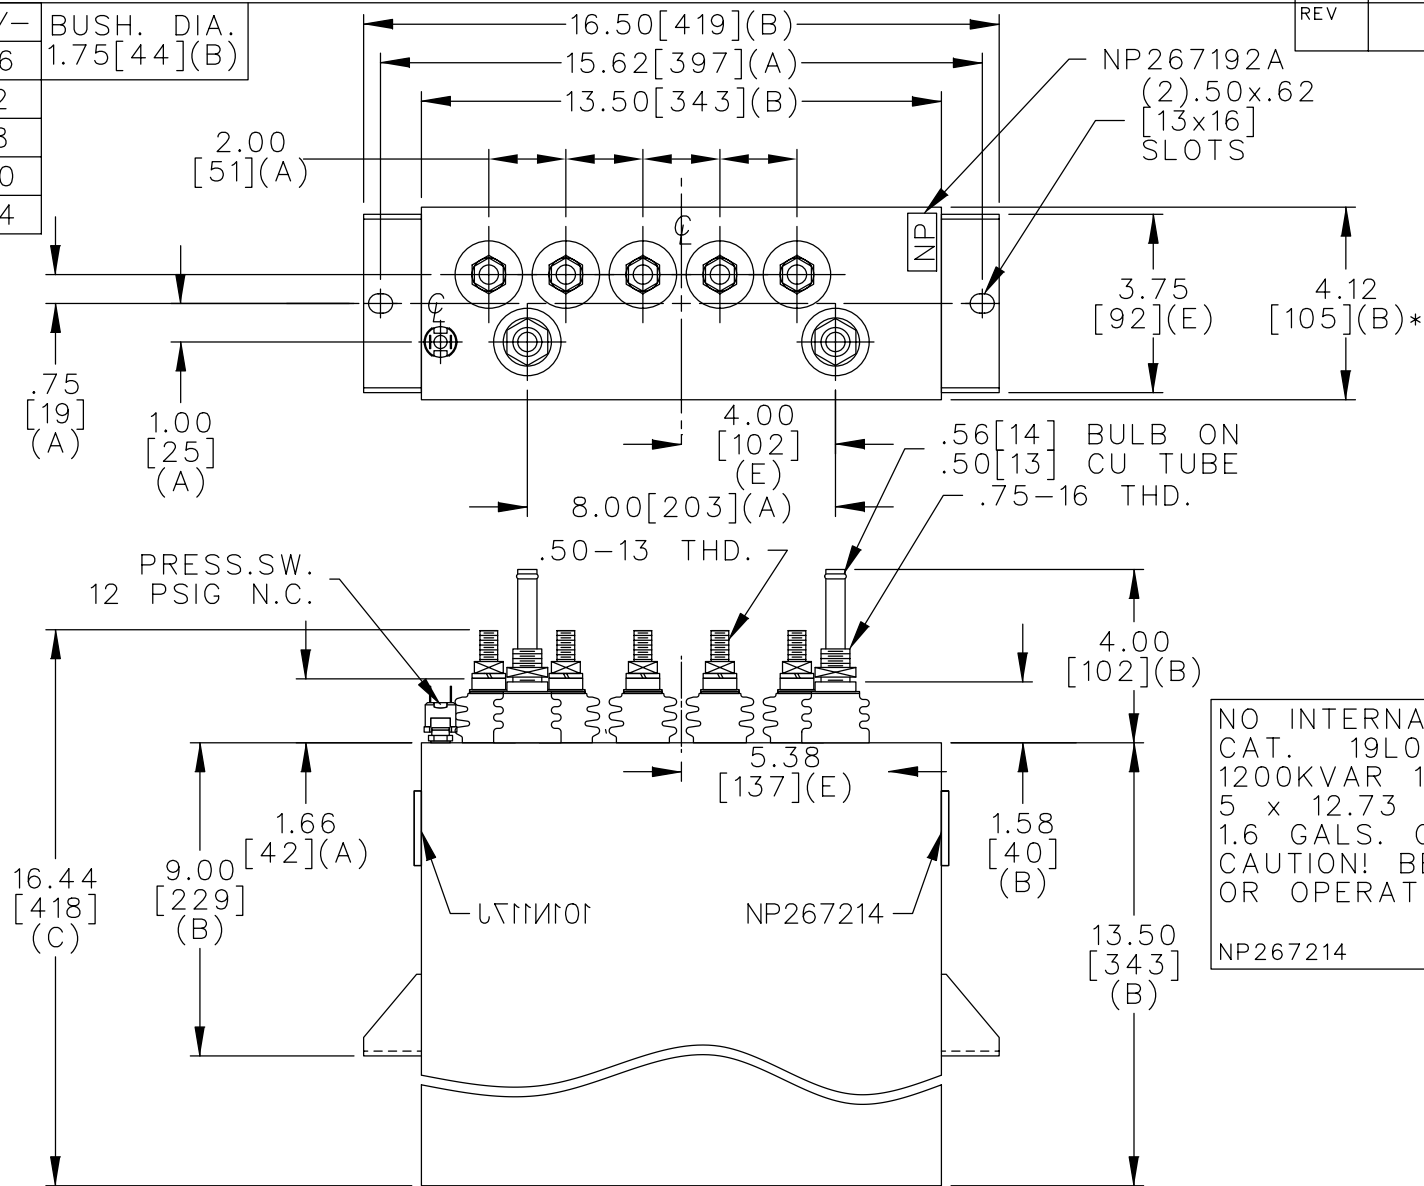

TERM	uF	kVAR
1	12.73	240
2	12.73	240
3	12.73	240
4	12.73	240
5	12.73	240

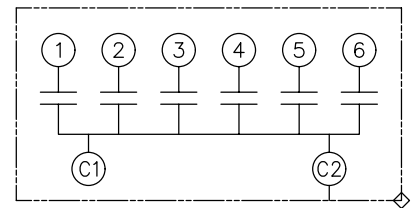

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0101WH4 SN
 1200KVAR 1000V 3000HZ 1PH
 5 x 12.73 UF/TAP
 1.6 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0101WH4	
	DRAWN E.McGINN	OCT. 30, 2000	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO