



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

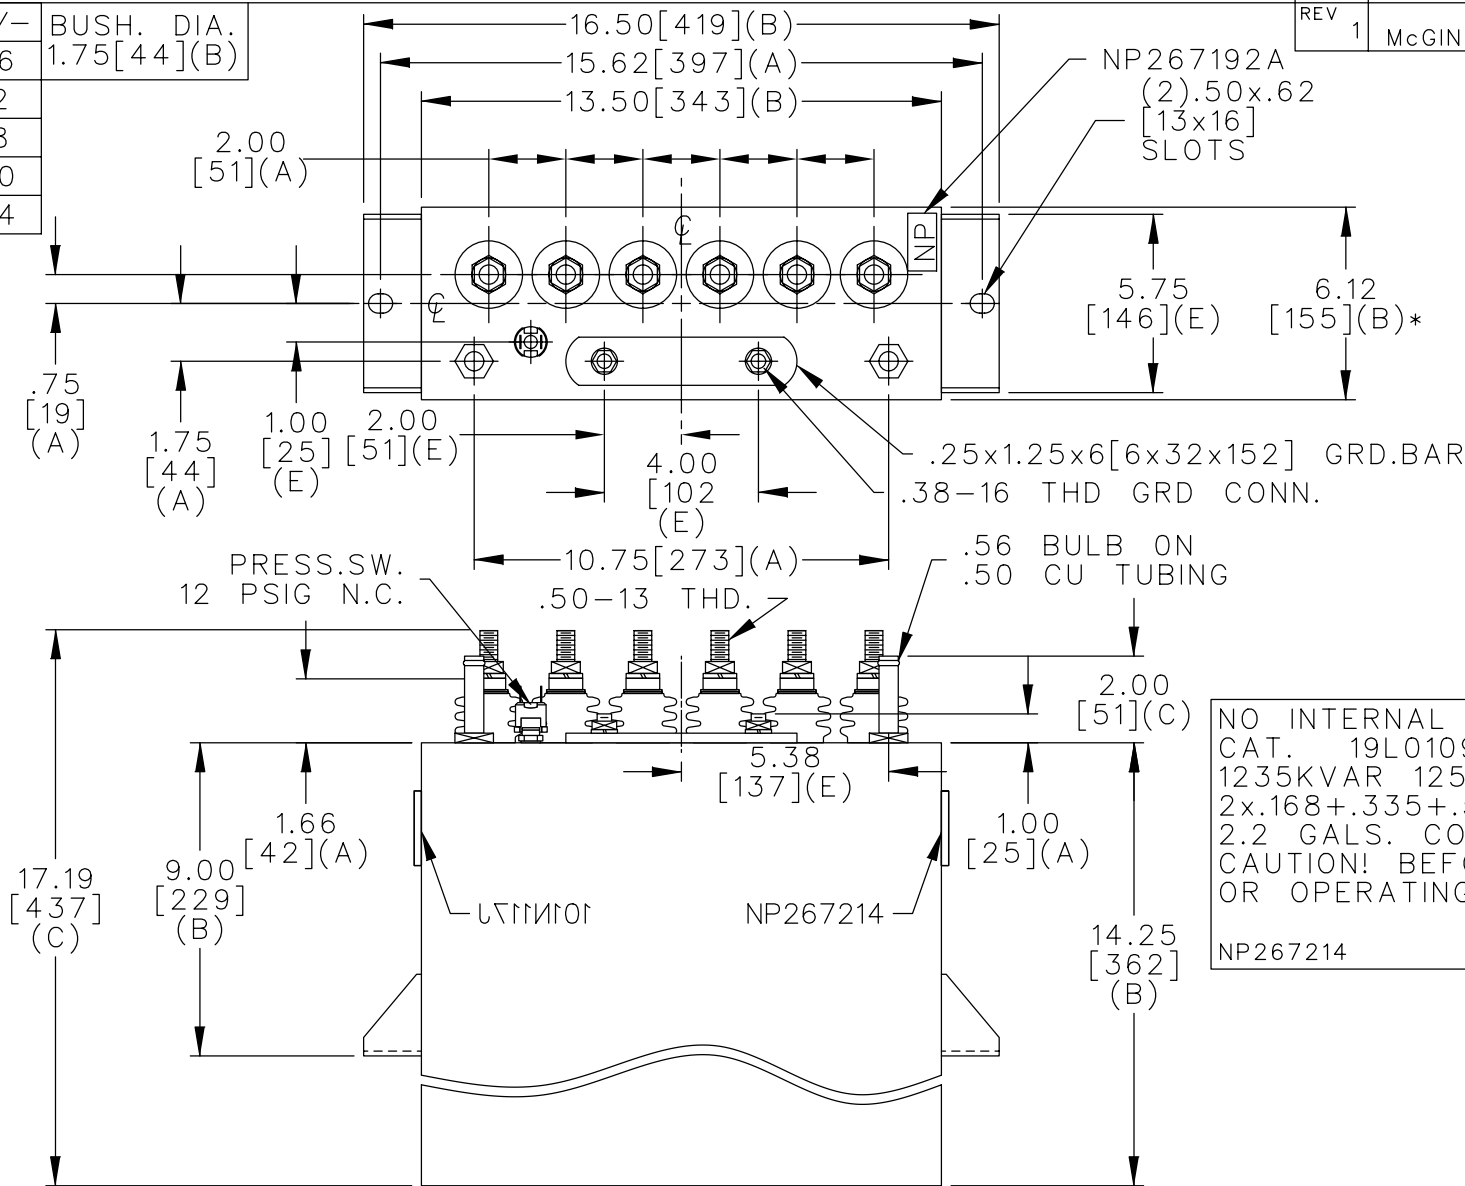

TERM	uF	kVAR
1	.168	82.3
2	.168	82.3
3	.335	164.7
4	.503	247.0
5	.671	329.3
6	.671	329.3

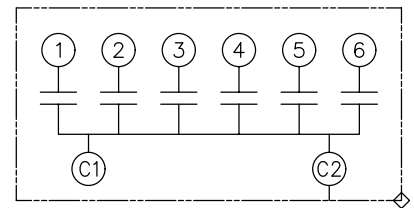

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0109WH4 SN
 1235KVAR 1250V 50000HZ 1PH
 2x.168+.335+.503+2x.67 UF/TAP
 2.2 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0109WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN DEC. 20, 1996	ISSUED 1-8-97	SCALE		