
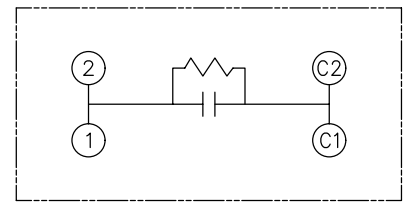


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

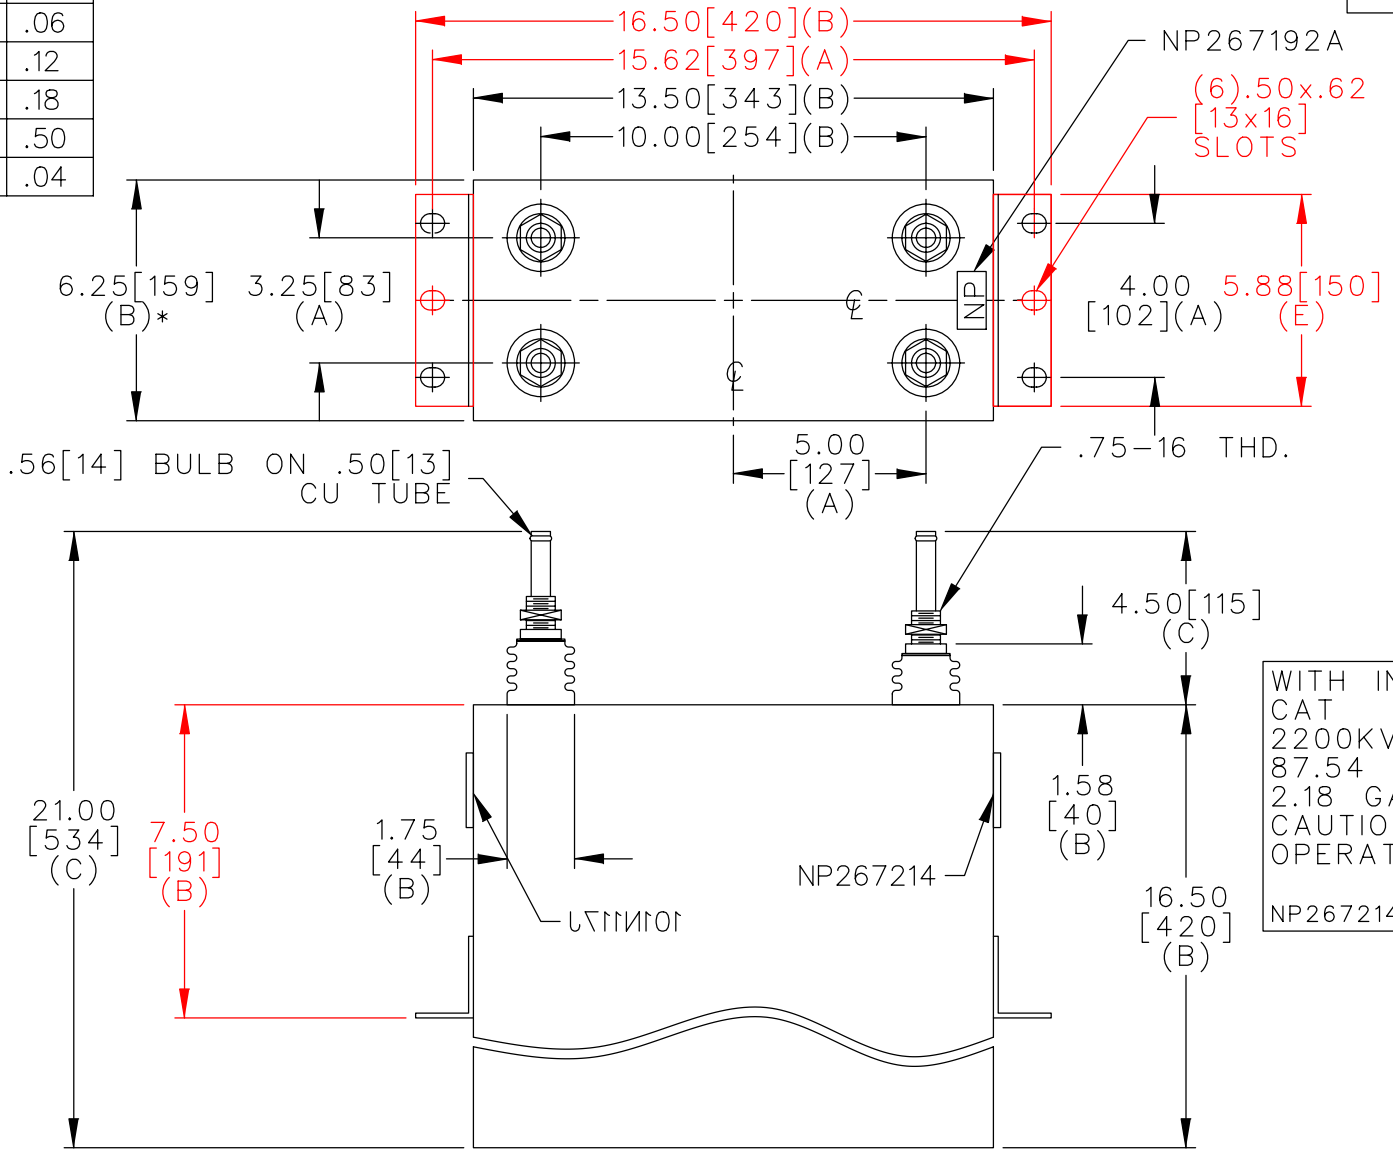

SCHEMATIC DIAGRAM - 107

WITH INTERNAL DISCH RESISTOR
 CAT 19L0117WH3 SN
 2200KVAR 2000V 1000HZ 1PH
 87.54 UF/TAP
 2.18 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 66 / 30 LB/KG	<h1>OUTLINE</h1> <h1>19L0117WH3</h1>	SHEET 2 CONT. 3 ON ON
	DRAWN E.McGINN	APR. 10, 1997	SCALE	DISTR TO		
ISSUED	4-16-97					