



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

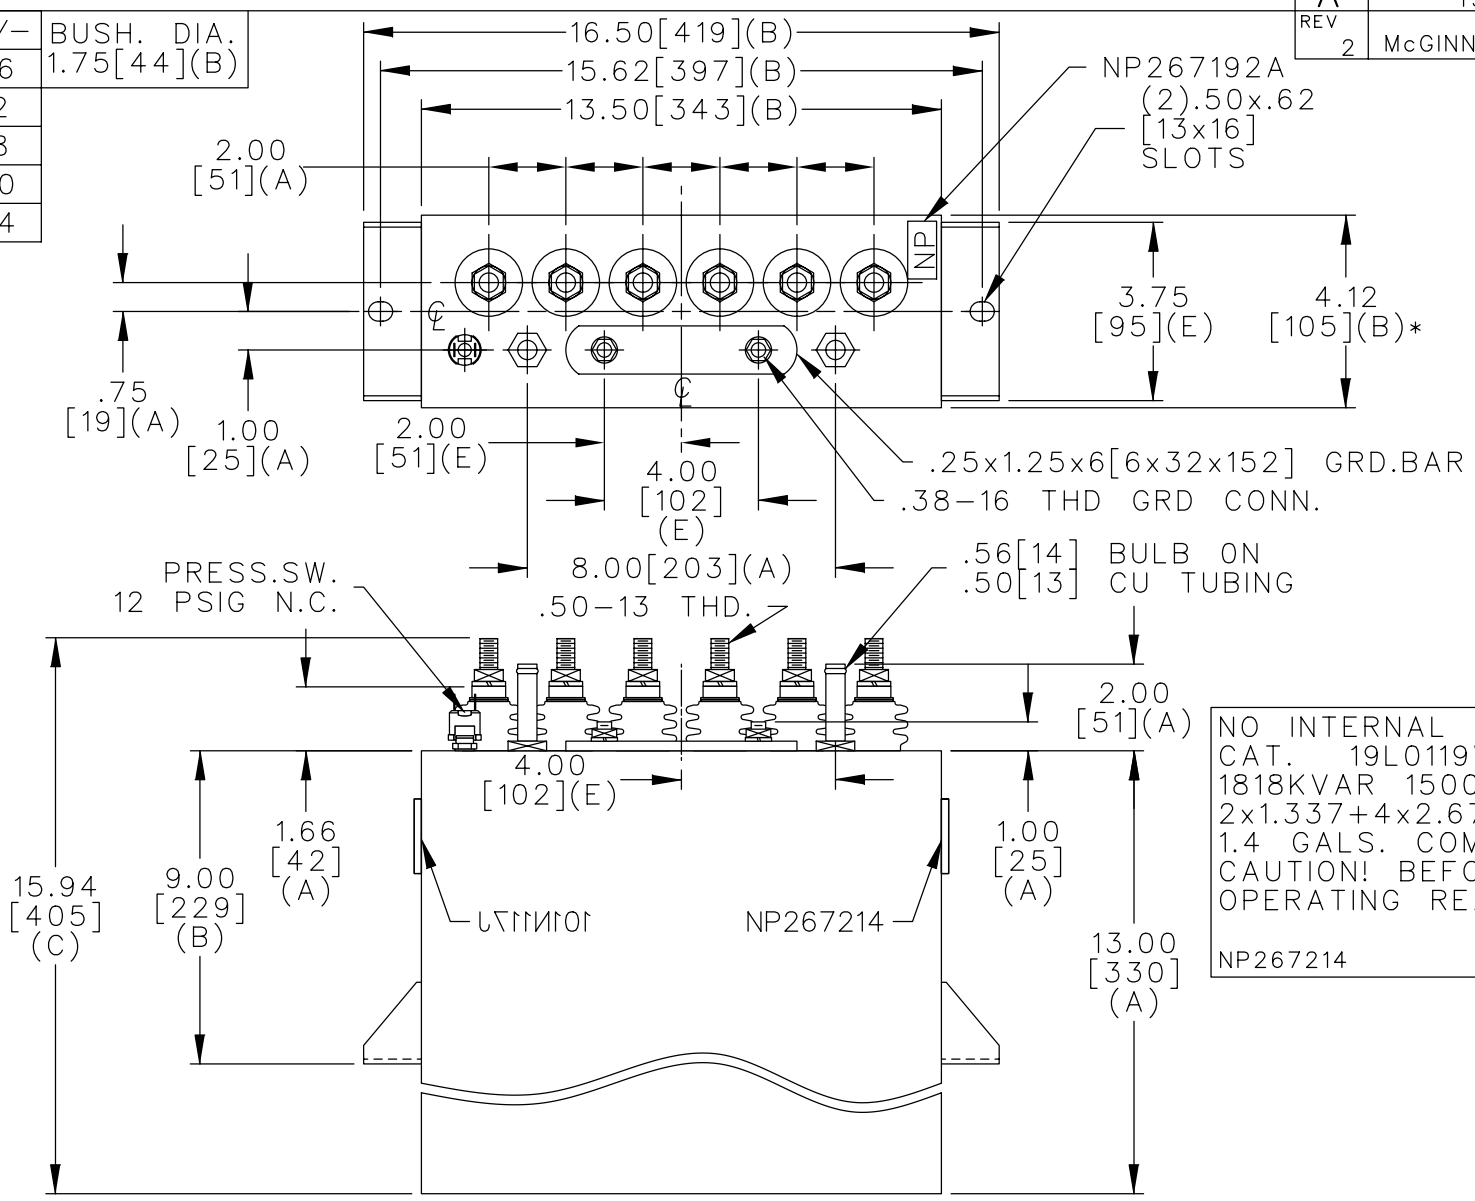

TERM	uF	kVAR
1	1.337	181.9
2	1.337	181.9
3	2.674	363.7
4	2.674	363.7
5	2.674	363.7
6	2.674	363.7

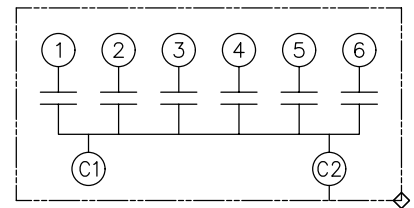

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0119WH4 SN
 1818KVAR 1500V 9600HZ 1PH
 2x1.337+4x2.674 UF/TAP
 1.4 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0119WH4	SHEET 2 CONT. ON -
	DRAWN EPC	OCT. 25, 1984	SCALE		
ISSUED	10/25/84	DISTR TO			