



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

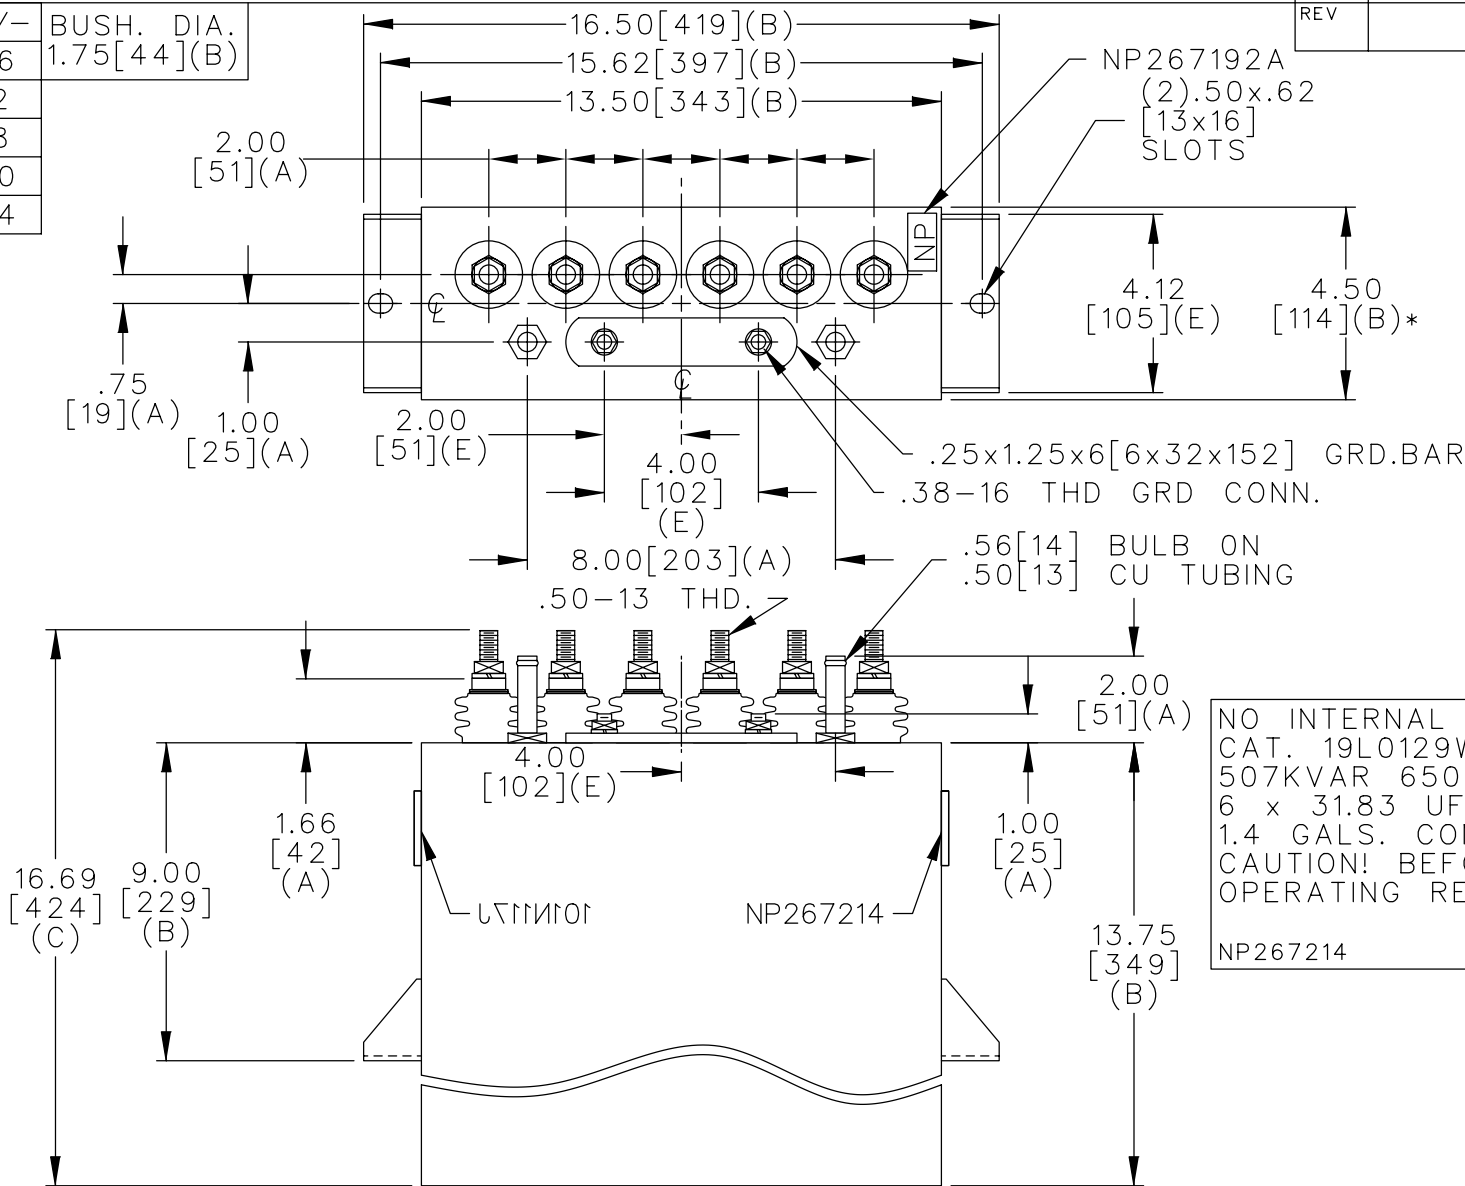

TERM	uF	kVAR
1	31.83	84.5
2	31.83	84.5
3	31.83	84.5
4	31.83	84.5
5	31.83	84.5
6	31.83	84.5

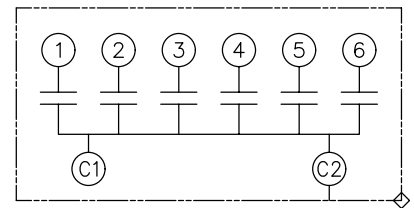

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0129WH3 SN  
 507KVAR 650VAC 1000HZ 1PH  
 6 x 31.83 UF/TAP  
 1.4 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0129WH3	
	DRAWN E.McGINN	JAN. 9, 2002	SCALE		
ISSUED	SHEET 2 CONT. 3		ON 3	DISTR TO	