

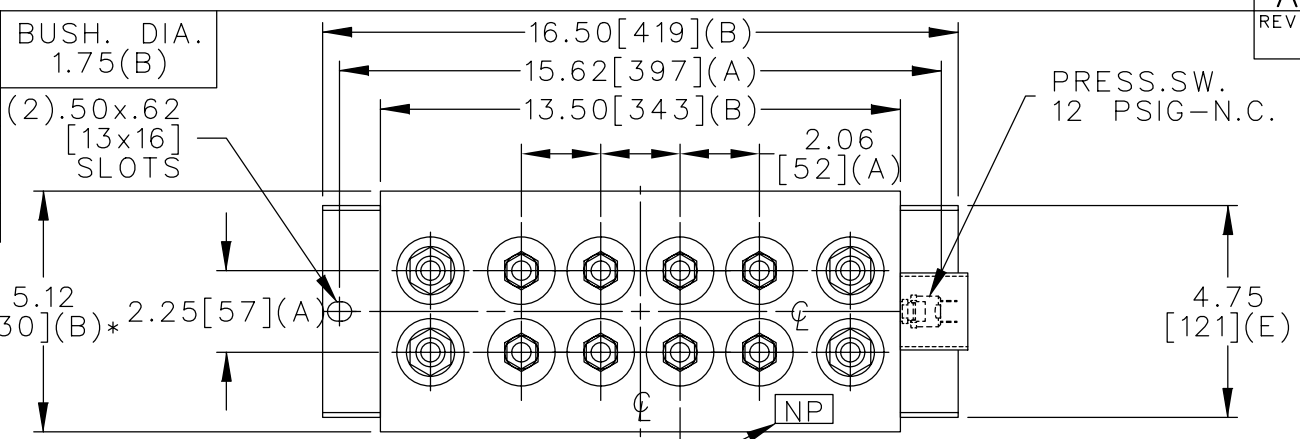


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

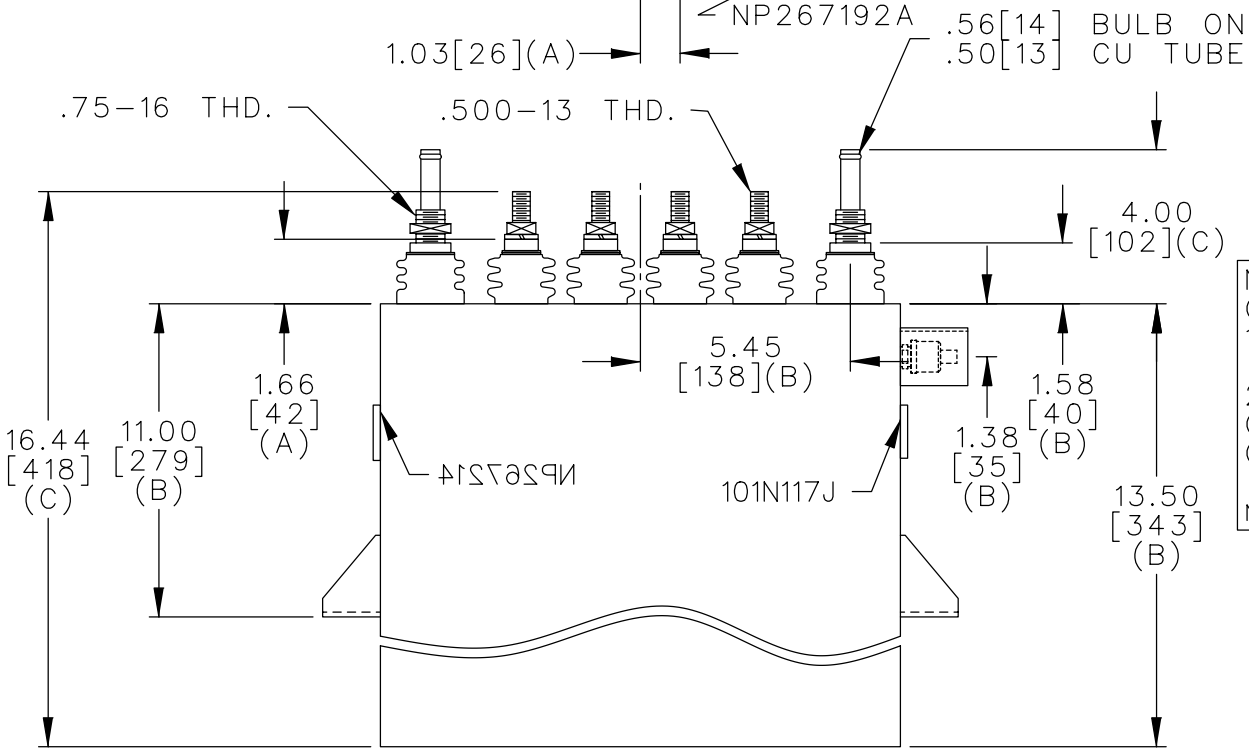

TERM	uF	kVAR
1	4.5	33
2	27.0	199
3	13.5	99
4	27.0	199
5	27.0	199
6	13.5	99
7	27.0	199
8	4.5	33

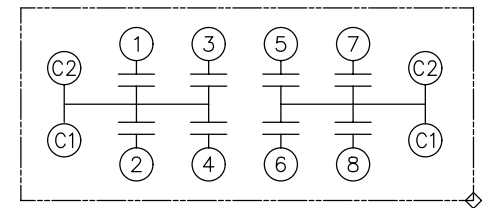

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0131WH4 SN  
 1060KVAR 625V 3000HZ 1PH  
 2.1 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING  
 OR OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0131WH4</b>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	DEC. 16, 1996	SCALE		
ISSUED	12-18-96	DISTR TO			