

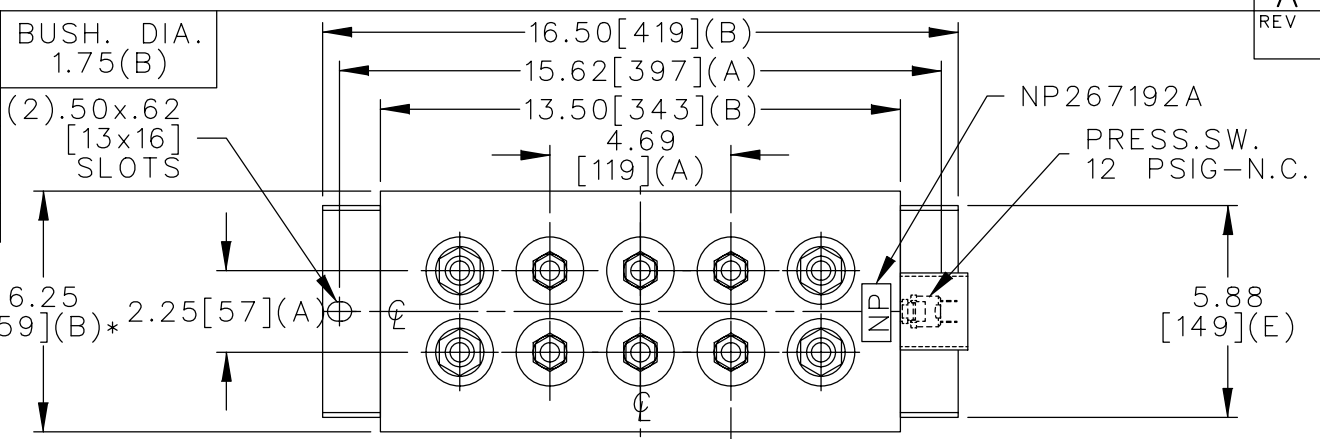



TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04

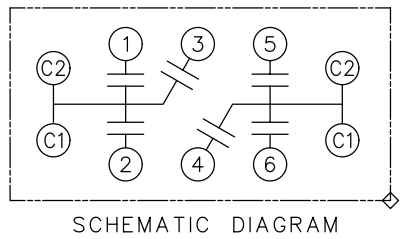

TERM	uF	kVAR
1	49.76	113.5
2	99.52	227
3	8.284	18.9
4	8.284	18.9
5	99.52	227
6	49.76	113.5

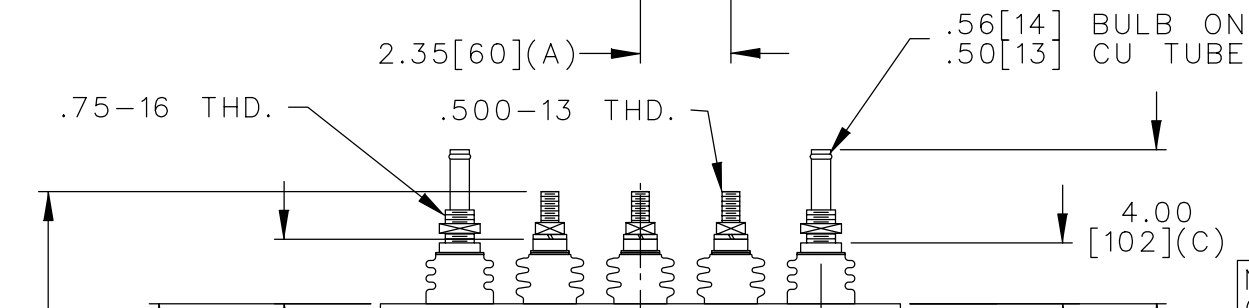

NO INTERNAL DISCH RESISTORS
 CAT. 19L0132WH4 SN
 594KVAR 500V 1200HZ 1PH
 2x99.5+2x49.76+2x8.3UF/TAP
 2.9 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

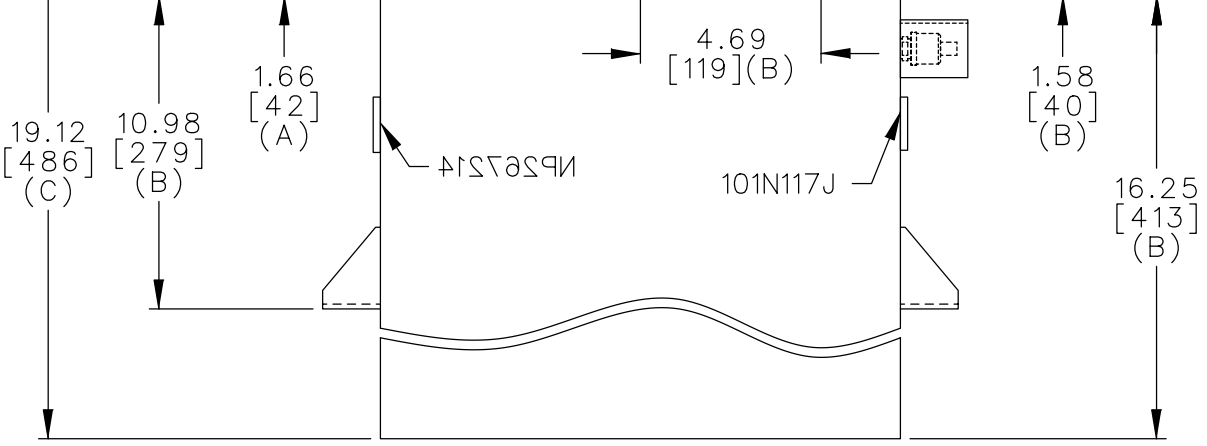

* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0132WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	AUG. 4, 1997	SCALE		
ISSUED					

DISTR TO