



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

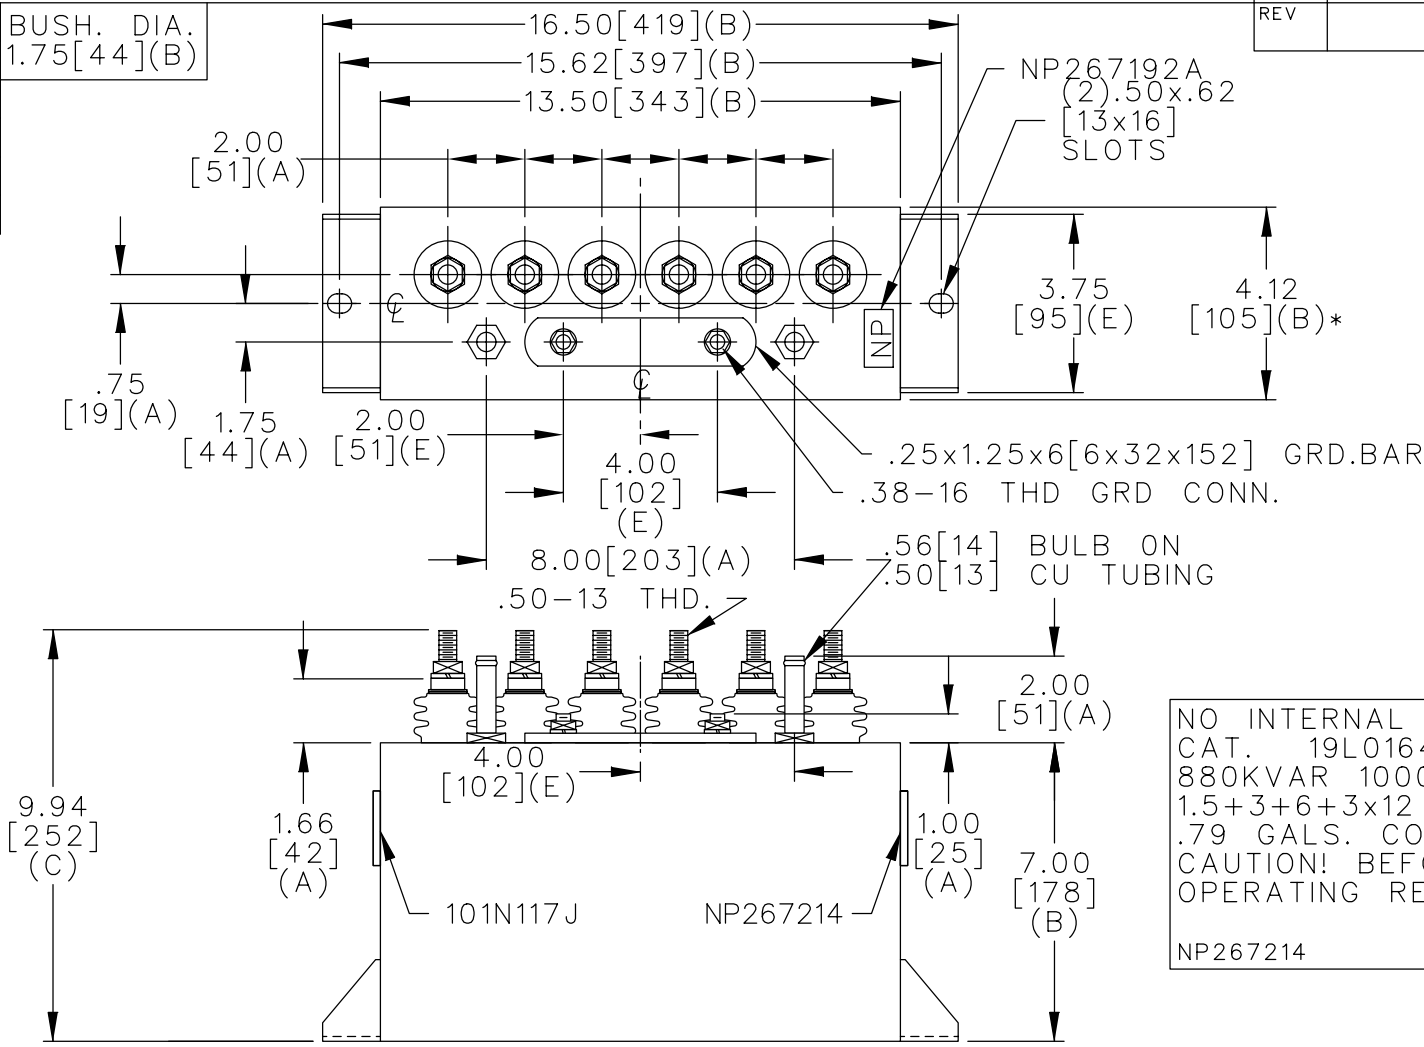

TERM	uF	kVAR
1	1.5	28
2	3	57
3	6	114
4	12	227
5	12	227
6	12	227

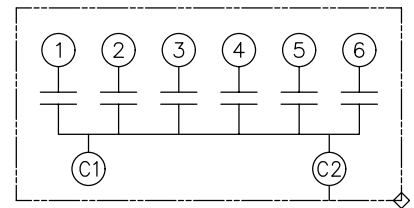

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0164WH3 SN  
 880KVAR 1000V 3000HZ 1PH  
 1.5+3+6+3x12 UF/TAP  
 .79 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0164WH3	
	DRAWN E.McGINN	SEPT. 20, 2000	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO