



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

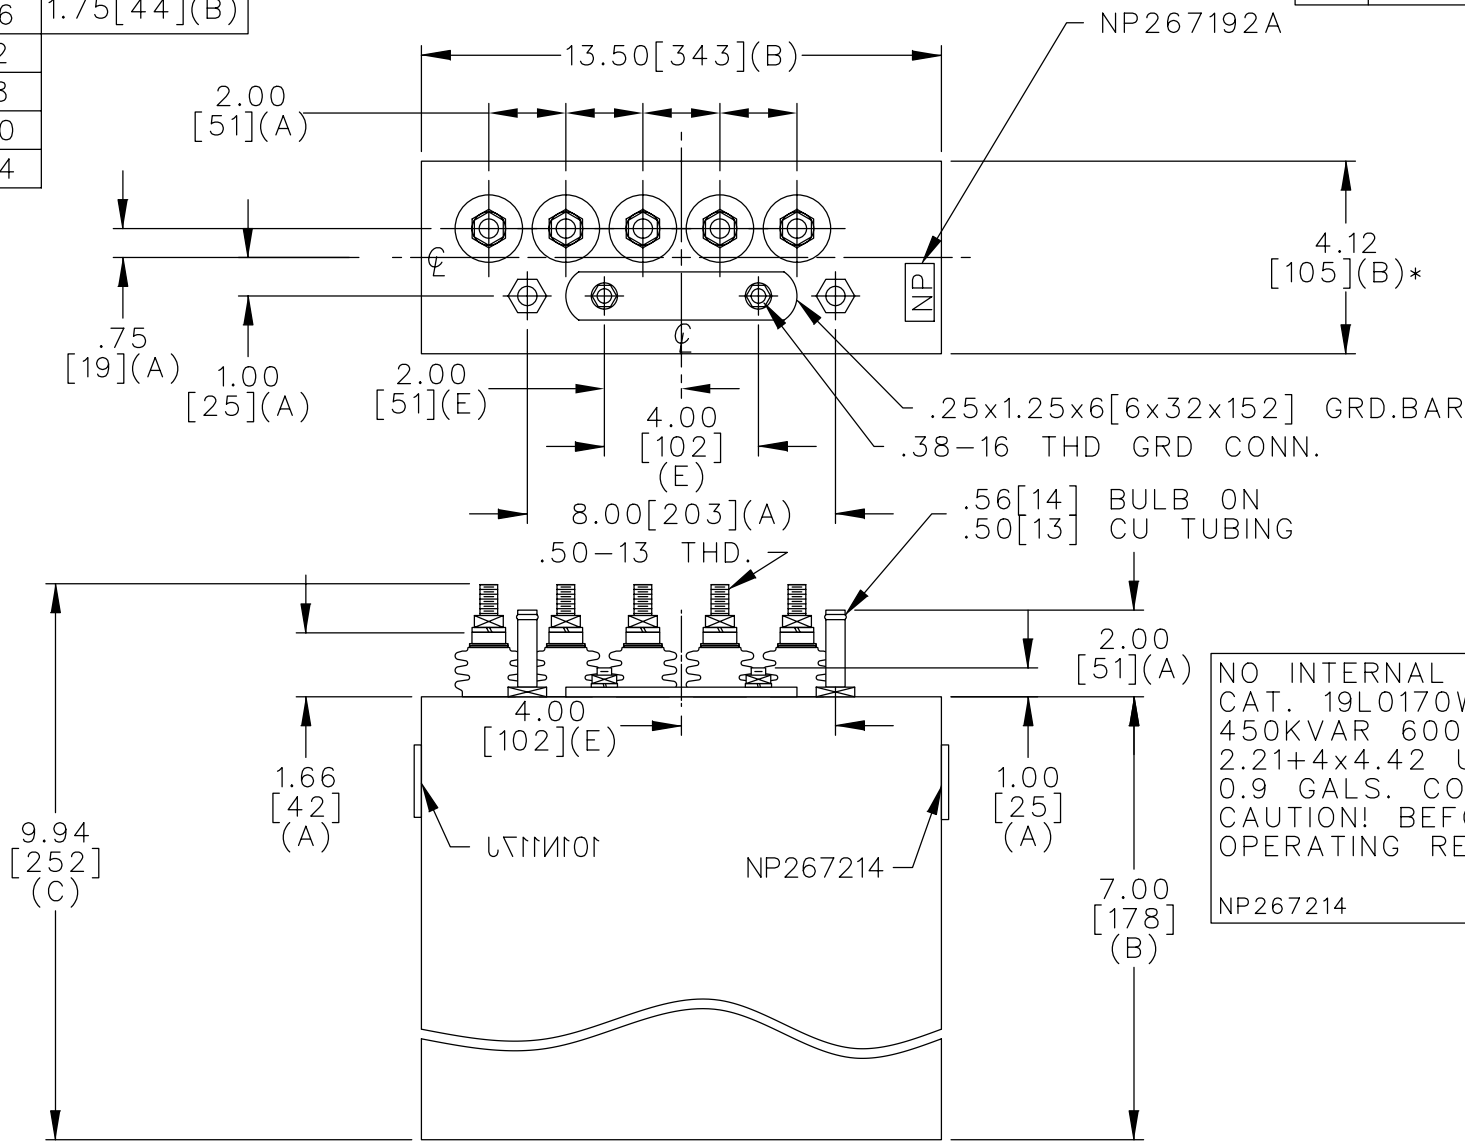

TERM	uF	kVAR
1	2.21	50
2	4.42	100
3	4.42	100
4	4.42	100
5	4.42	100

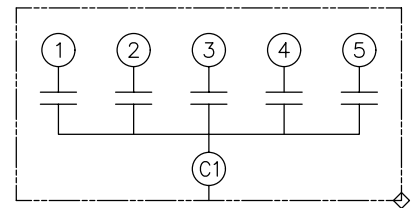

NO INTERNAL DISCH RESISTORS
 CAT. 19L0170WH1 SN
 450KVAR 600V 10000HZ 1PH
 2.21+4x4.42 UF/TAP
 0.9 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	
	DRAWN E.McGINN	JULY 20, 1999
ISSUED	SCALE	SHEET 2 CONT. ON -

SIZE
A

OUTLINE
19L0170WH1

DISTR TO