



| | | |
|-----|-----|-------------|
| TOL | +/- | BUSH. DIA. |
| A | .06 | 1.75[44](B) |
| B | .12 | |
| C | .18 | |
| D | .50 | |
| E | .04 | |

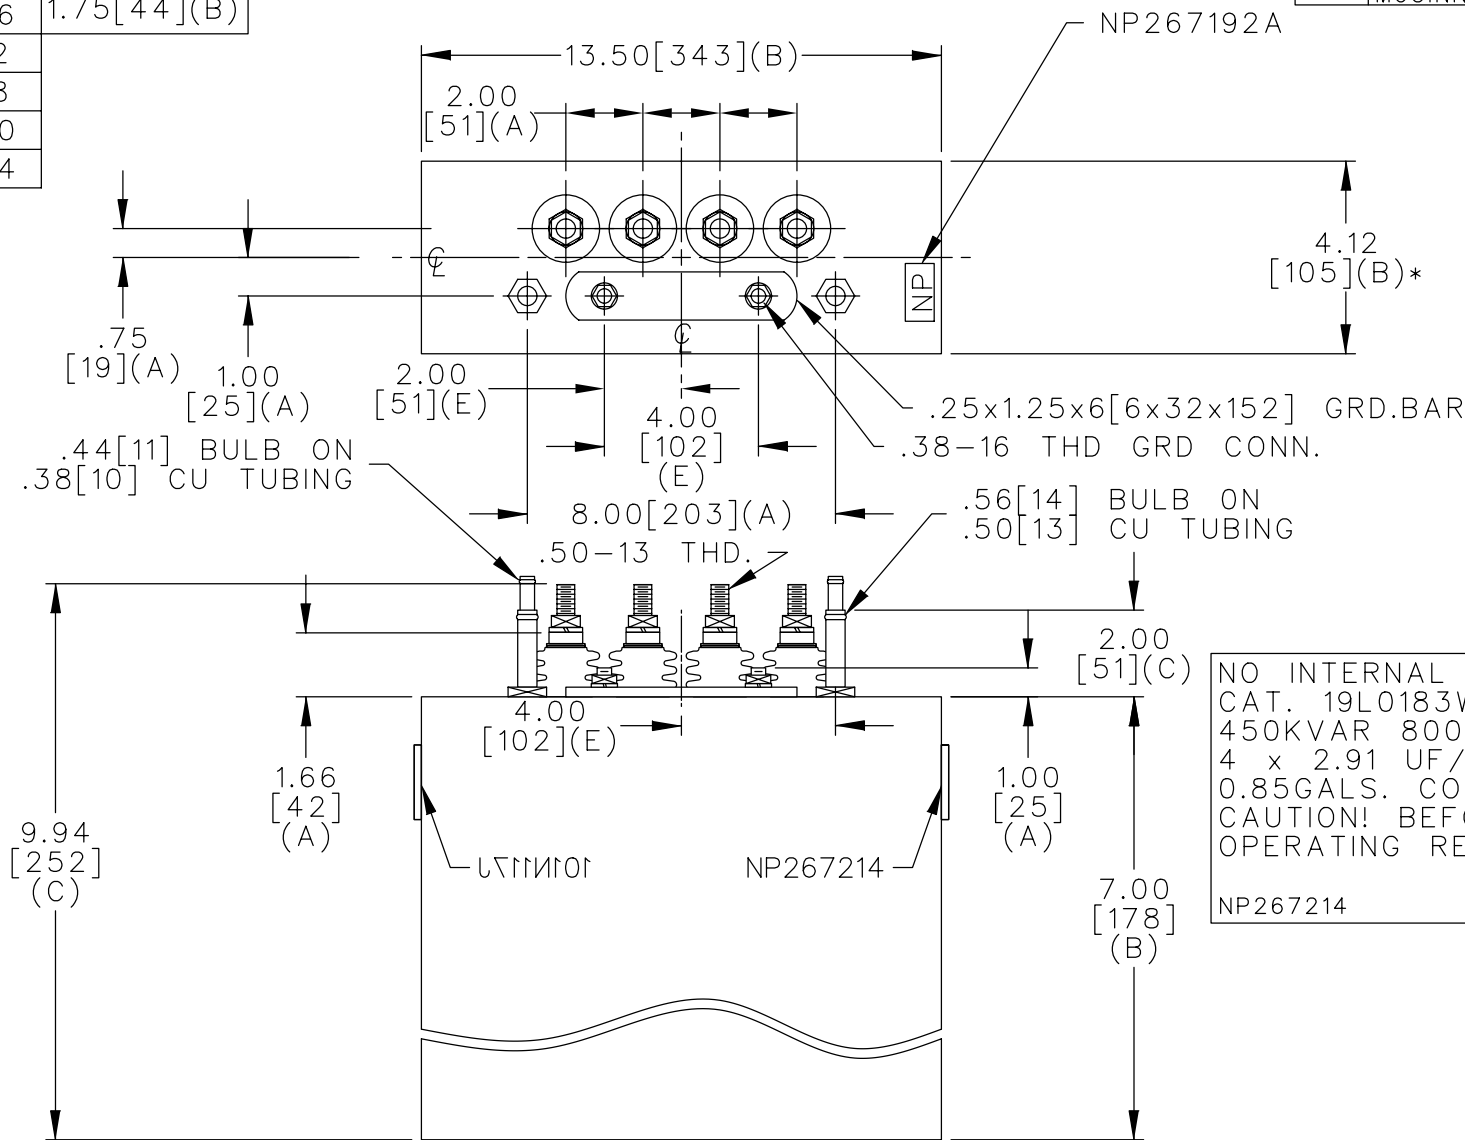

| TERM | uF | kVAR |
|------|------|-------|
| 1 | 2.91 | 112.5 |
| 2 | 2.91 | 112.5 |
| 3 | 2.91 | 112.5 |
| 4 | 2.91 | 112.5 |

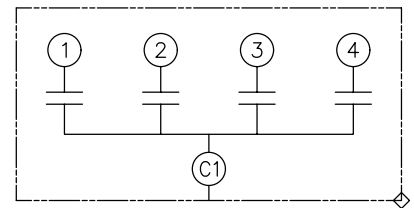

SCHEMATIC DIAGRAM - 416

NO INTERNAL DISCH RESISTORS
 CAT. 19L0183WH1 SN
 450KVAR 800V 9600HZ 1PH
 4 x 2.91 UF/TAP
 0.85GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

| | | |
|--|---|--------------|
| | CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A. | |
| | DRAWN E.McGINN | DEC. 9, 1997 |
| | ISSUED 12-10-97 | |

| |
|------------------|
| SIZE A |
| SCALE |

| |
|--------------------------------------|
| <h1>OUTLINE</h1> <h2>19L0183WH1</h2> |
| SHEET 2 CONT. ON - |

DISTR TO