

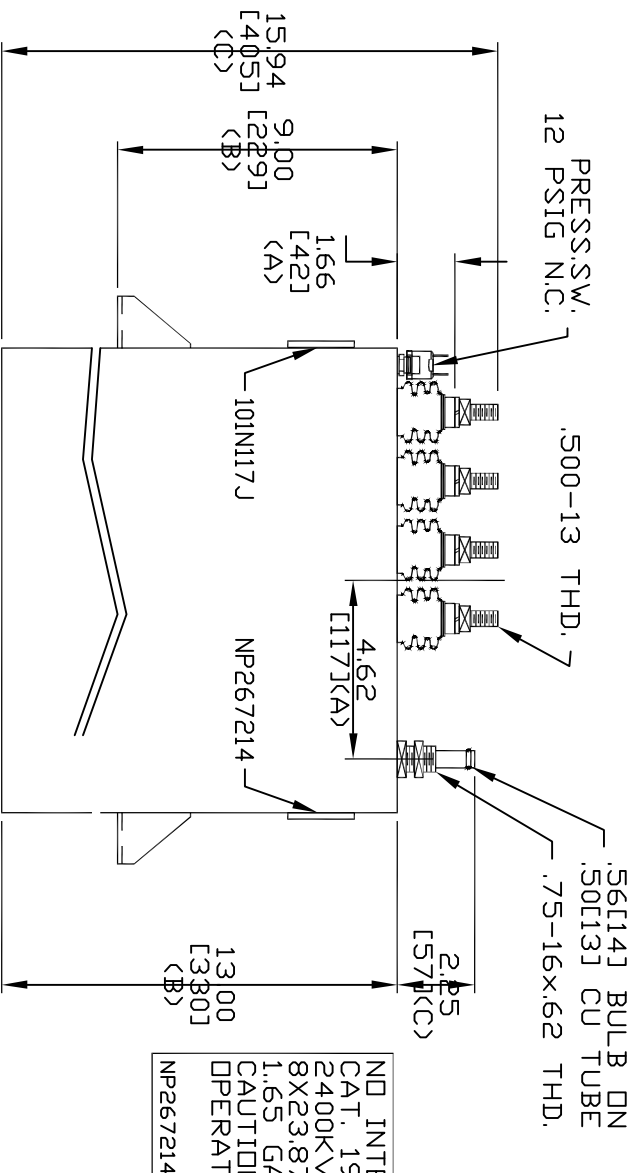


TOL	+/-	BUSH. DIA.
A	.06	1.75[444](B)
B	.12	
C	.18	
D	.50	
E	.04	

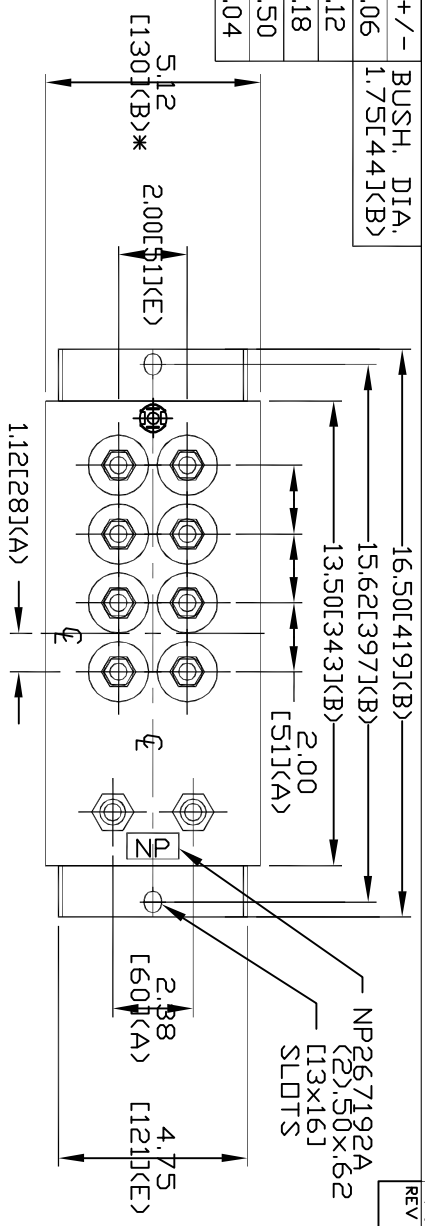

TERM	UF	KVAR
1	23.87	300
2	23.87	300
3	23.87	300
4	23.87	300
5	23.87	300
6	23.87	300
7	23.87	300
8	23.87	300

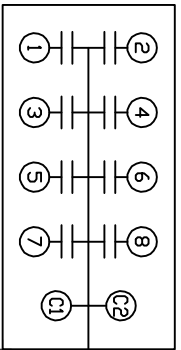


SCHEMATIC DIAGRAM - 801

ND INTERNAL DISCH RESISTORS
 CAT. 19L0211WH4 SN
 2400KVAR 1000V 2000HZ 1PH
 8X23.87 UF/TAP
 1.65 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING DR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS
 NP267192A

SIZE	DWG. NO.	SH	REV
A	19L0211WH4		
REV		DATE	


 CAPACITOR & POWER PROTECTION
 FORT EDWARD, N.Y., U.S.A.

DRAWN B. ROSS
 ISSUED

SIZE A
 SCALE

OUTLINE
 19L0211WH4

SHEET 2 OF 2
 DISTR TO