

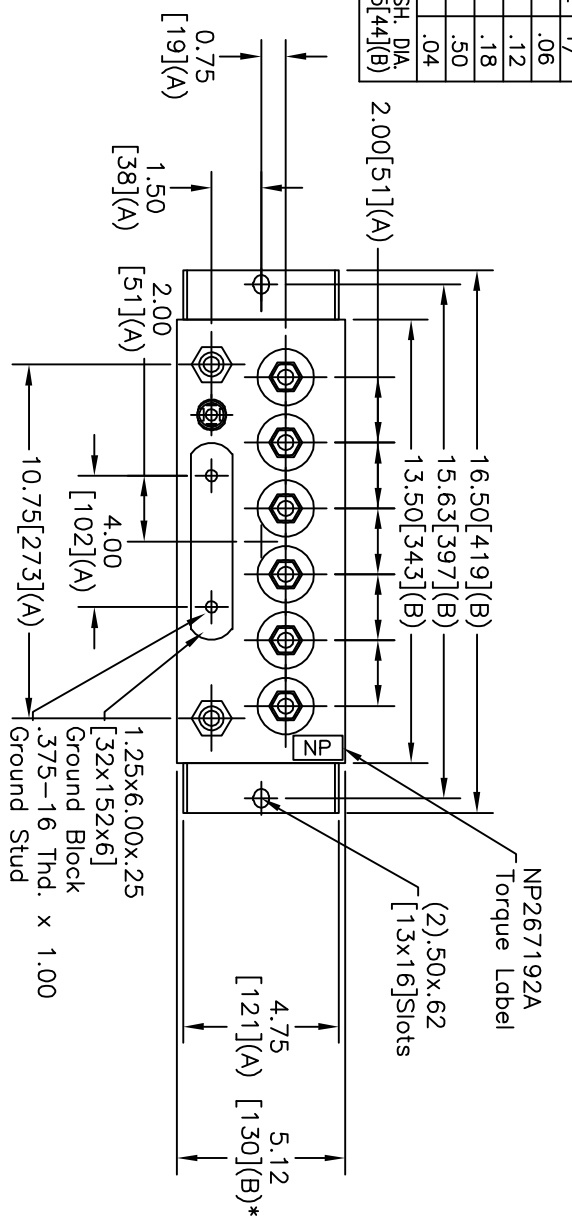


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04
BUSH. DIA.	1.75[.44](B)



TERM	UF	KVAR
1	0.597	60
2	1.194	120
3	2.387	240
4	2.387	240
5	2.387	240
6	2.387	240

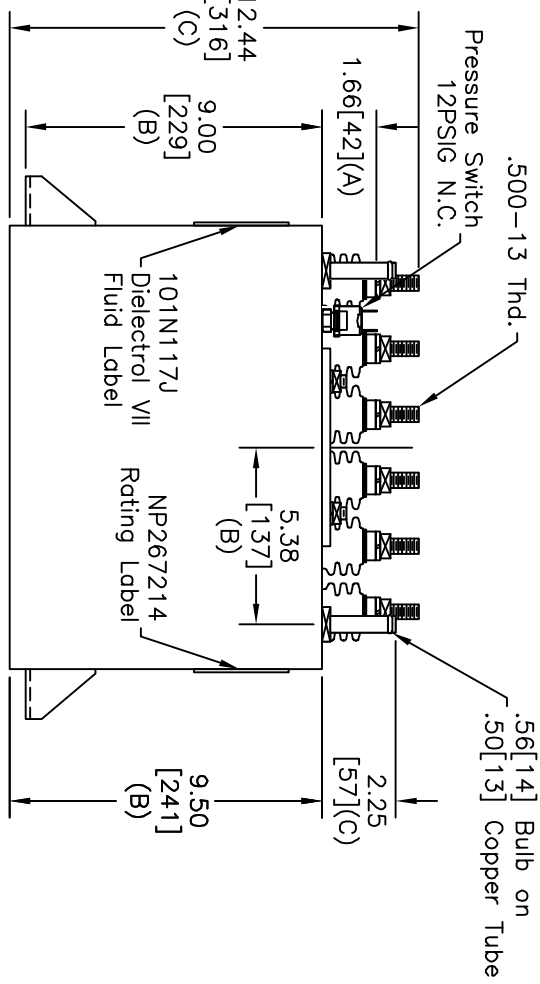

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0212WH4 SN  
 1140KVAR 800V 25000HZ 1PH  
 0.597+1.194+4x2.387UF/TAP  
 1.3 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 MADE IN USA  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE  
 MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS.  
 NP267192A

**INDUSTRIAL SYSTEMS**  
**FORT EDWARD, N.Y., U.S.A.**

DRAWN E.MCGINN  
 DATE 4/17/1997

ISSUED DATE 4/23/1997

SIZE **A**

**OUTLINE**  
**19L0212WH4**

SHEET 2 CONT ON -

SIZE	DWG NO	SHT	REV
A	19L0212WH4	2	3
REV	DESCRIPTION	DATE	APPROVED
3	RETRACE	9/14/2005	BTR