



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

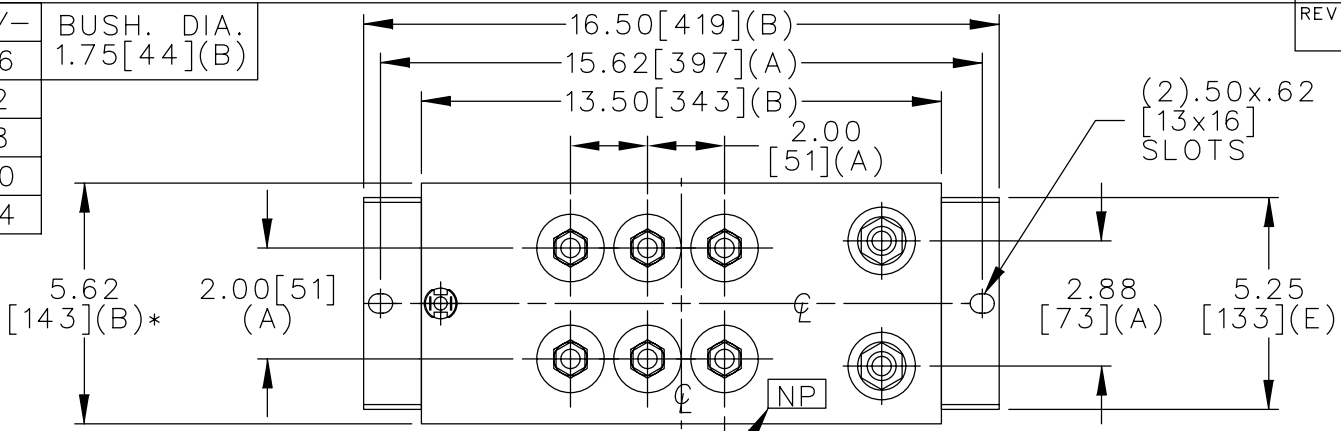


TERM	uF	kVAR
1	39.79	250
2	39.79	250
3	39.79	250
4	39.79	250
5	39.79	250
6	39.79	250

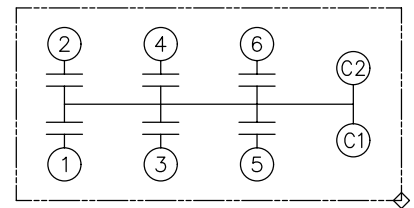

PRESS.SW.
12 PSIG N.C.

.75-16x.86 THD.
500-13 THD.

BULB ON
CU TUBE

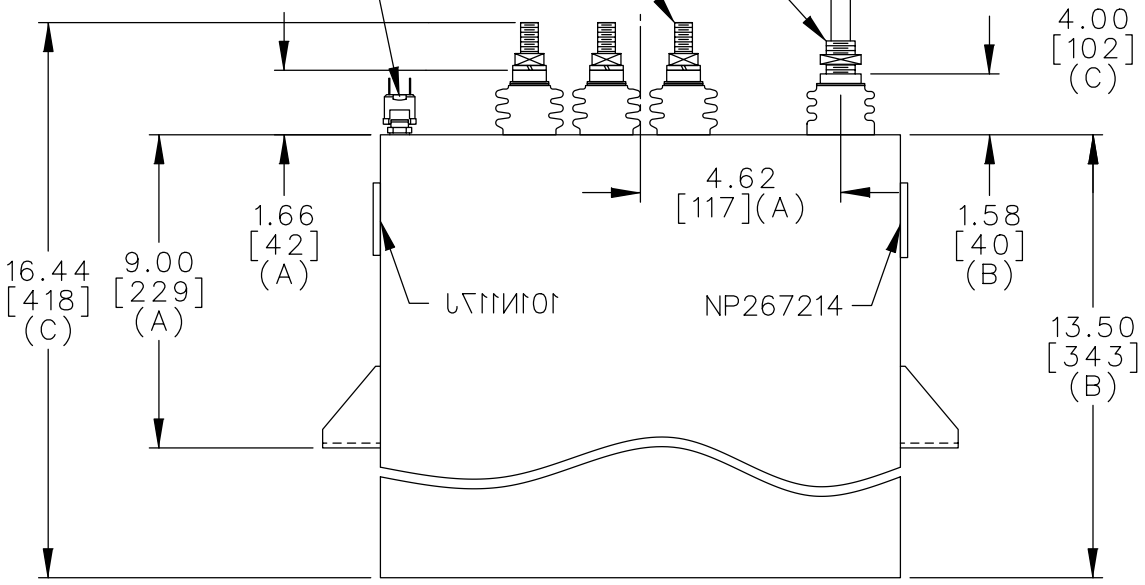

NO INTERNAL DISCH RESISTOR
 CAT. 19L0219WH4 SN
 1500KVAR 1000V 1000HZ 1PH
 6 x 39.79 UF/TAP
 1.7 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0219WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JAN. 28, 2000	SCALE		