




TOL	+/-	BUSH. DIA.
A	.06	1.75(B)
B	.12	
C	.18	
D	.50	
E	.04	

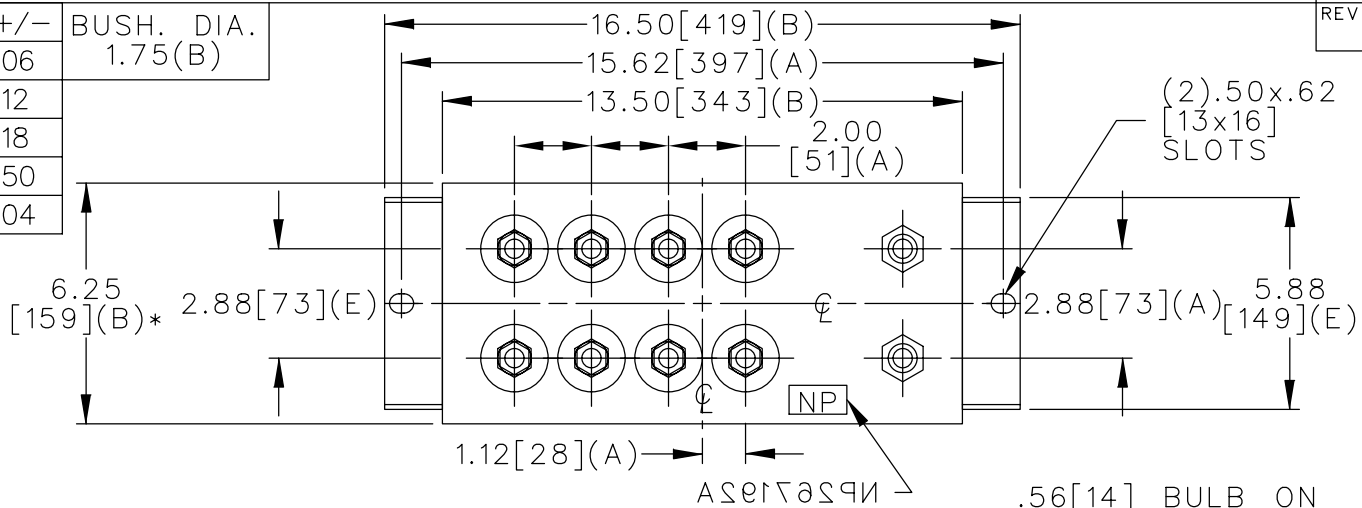

TERM	uF	kVAR
1	9.81	96.3
2	19.62	192.6
3	39.23	385.2
4	39.23	385.2
5	39.23	385.2
6	39.23	385.2
7	39.23	385.2
8	39.23	385.2

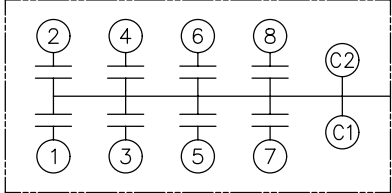

SCHEMATIC DIAGRAM - 801

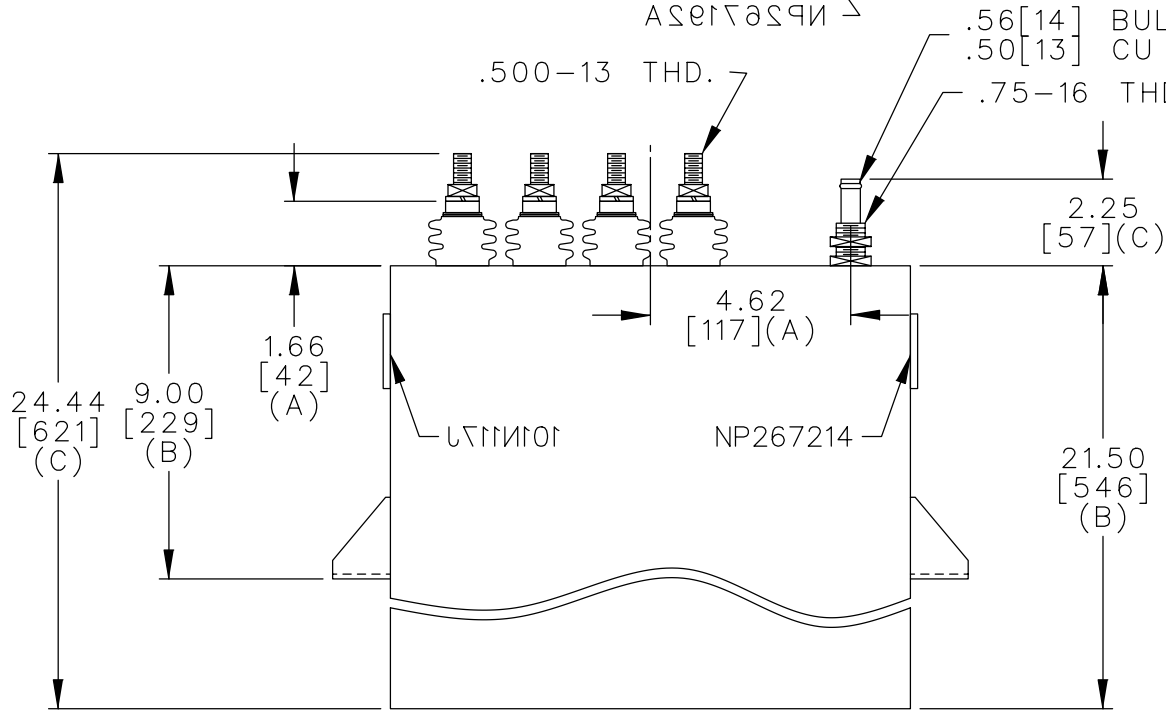

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0230WH3 SN  
 2600KVAR 1250V 1000HZ 1PH  
 9.81+19.62+6x39.23 UF/TAP  
 2.7 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0230WH3	
	DRAWN E. McGINN	OCT. 16, 1998	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO