




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

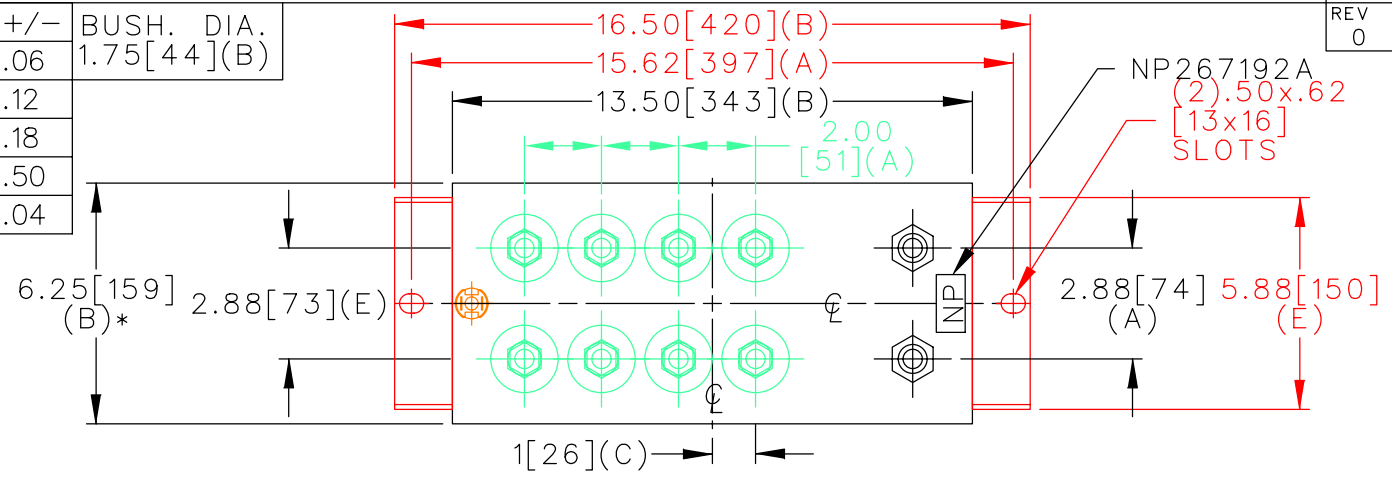

TERM	uF	kVAR
1	99.47	100
2	99.47	100
3	99.47	100
4	99.47	100
5	99.47	100
6	99.47	100
7	99.47	100
8	99.47	100

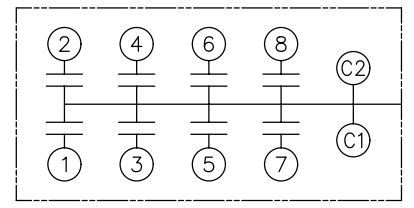

SCHEMATIC DIAGRAM - 801

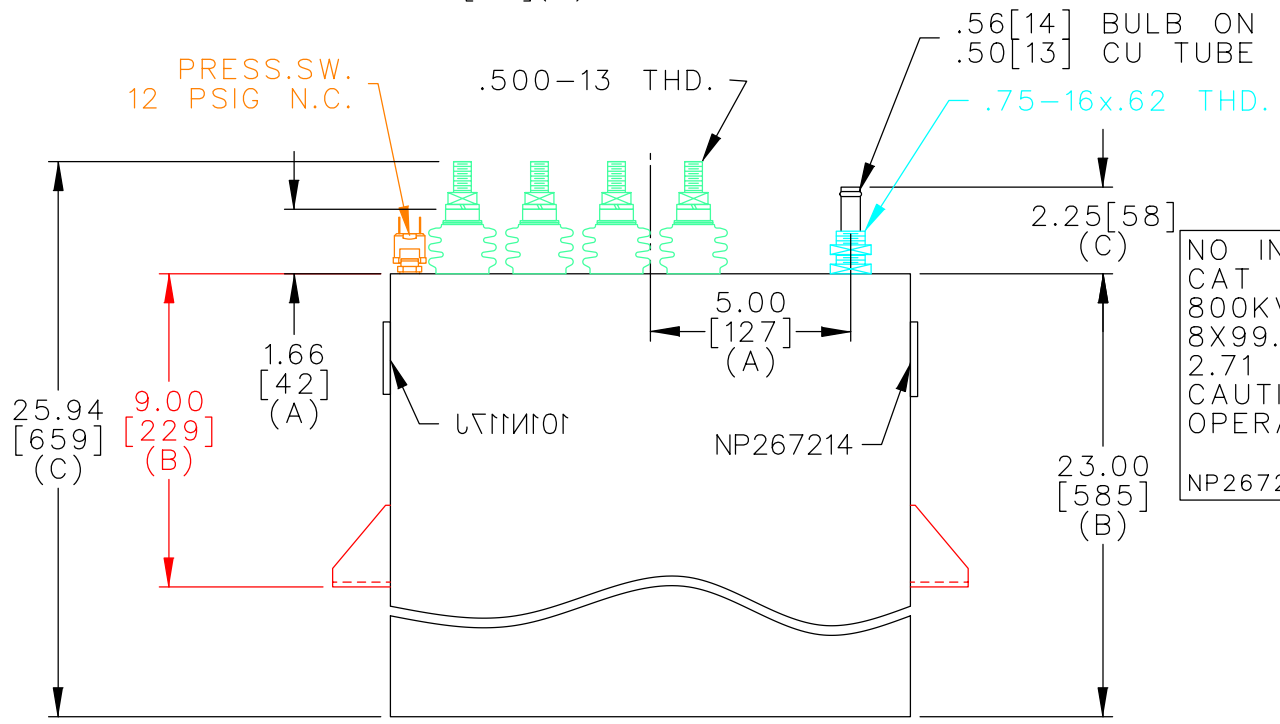

NO INTERNAL DISCH RESISTORS  
 CAT 19L0245WH4 SN  
 800KVAR 400V 1000HZ 1PH  
 8X99.47 UF/TAP  
 2.71 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 101 / 46 LB/KG	<h1>OUTLINE</h1> <h1>19L0245WH4</h1>	SHEET 2 CONT. 3 ON ON
	DRAWN 01/07/00	LRD ?	SCALE WC12	version		
ISSUED						DISTR TO