



TOL	+/-	BUSH. DIA.
A	.06	1.75 [44] (B)
B	.12	
C	.18	
D	.50	
E	.04	

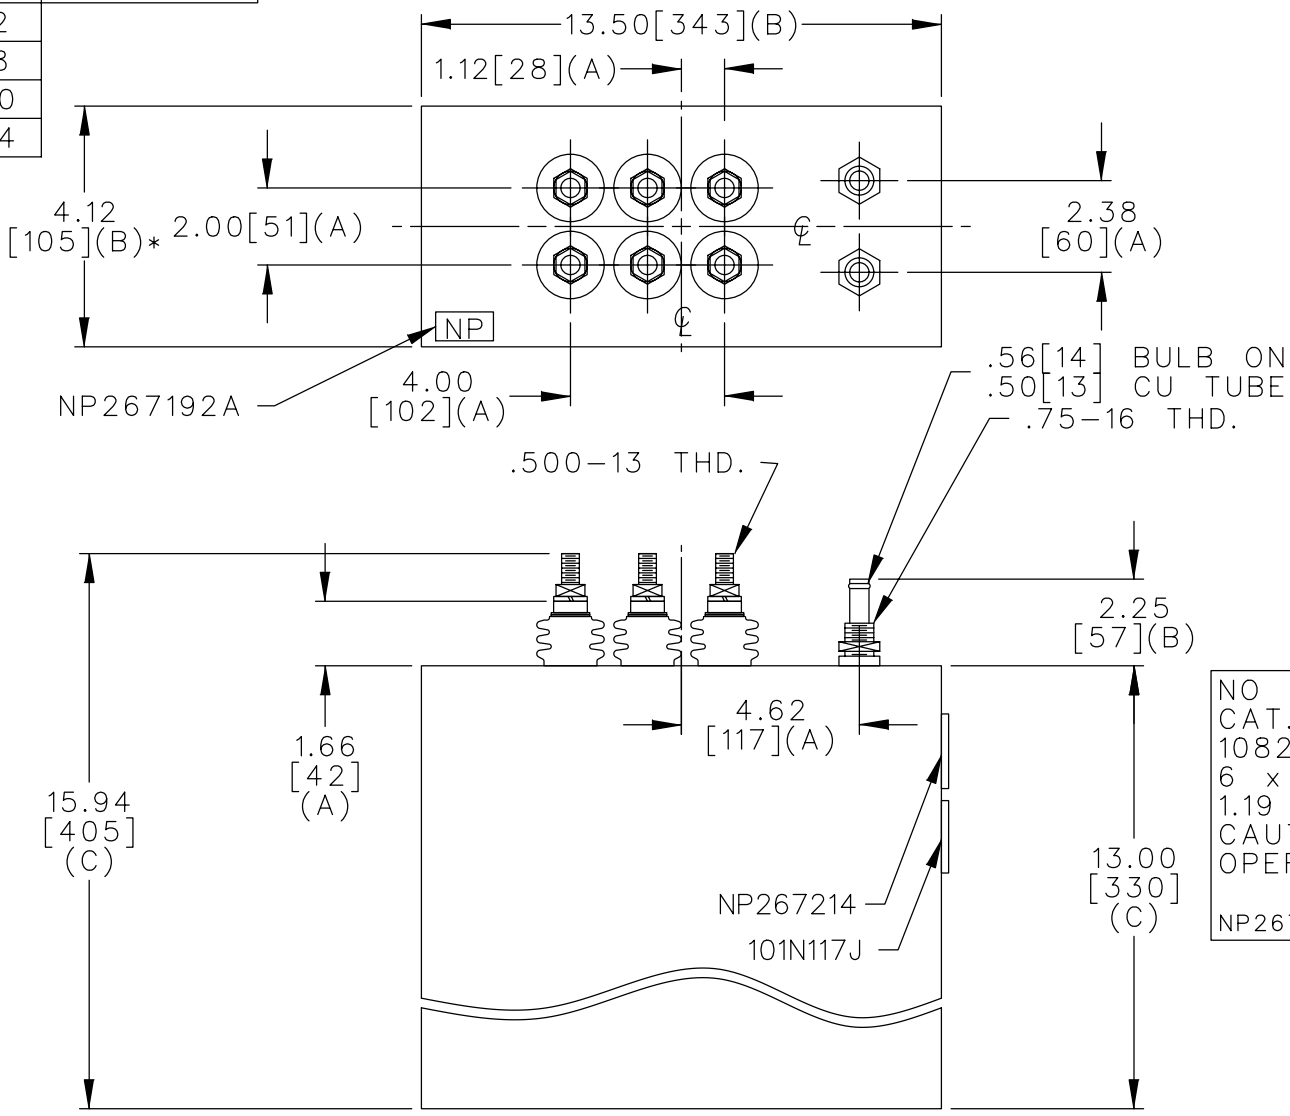

TERM	uF	kVAR
1	21	180.3
2	21	180.3
3	21	180.3
4	21	180.3
5	21	180.3
6	21	180.3

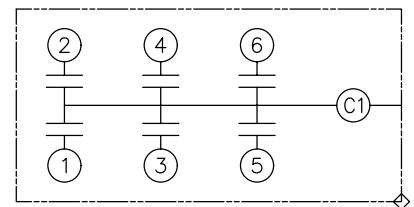

SCHEMATIC DIAGRAM - 606

NO INTERNAL DISCH RESISTORS
 CAT. 19L0272WH1 SN
 1082KVAR 675V 3000HZ 1PH
 6 x 21 UF/TAP
 1.19 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0272WH1	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JUNE 14, 2001			
ISSUED				DISTR TO	