



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

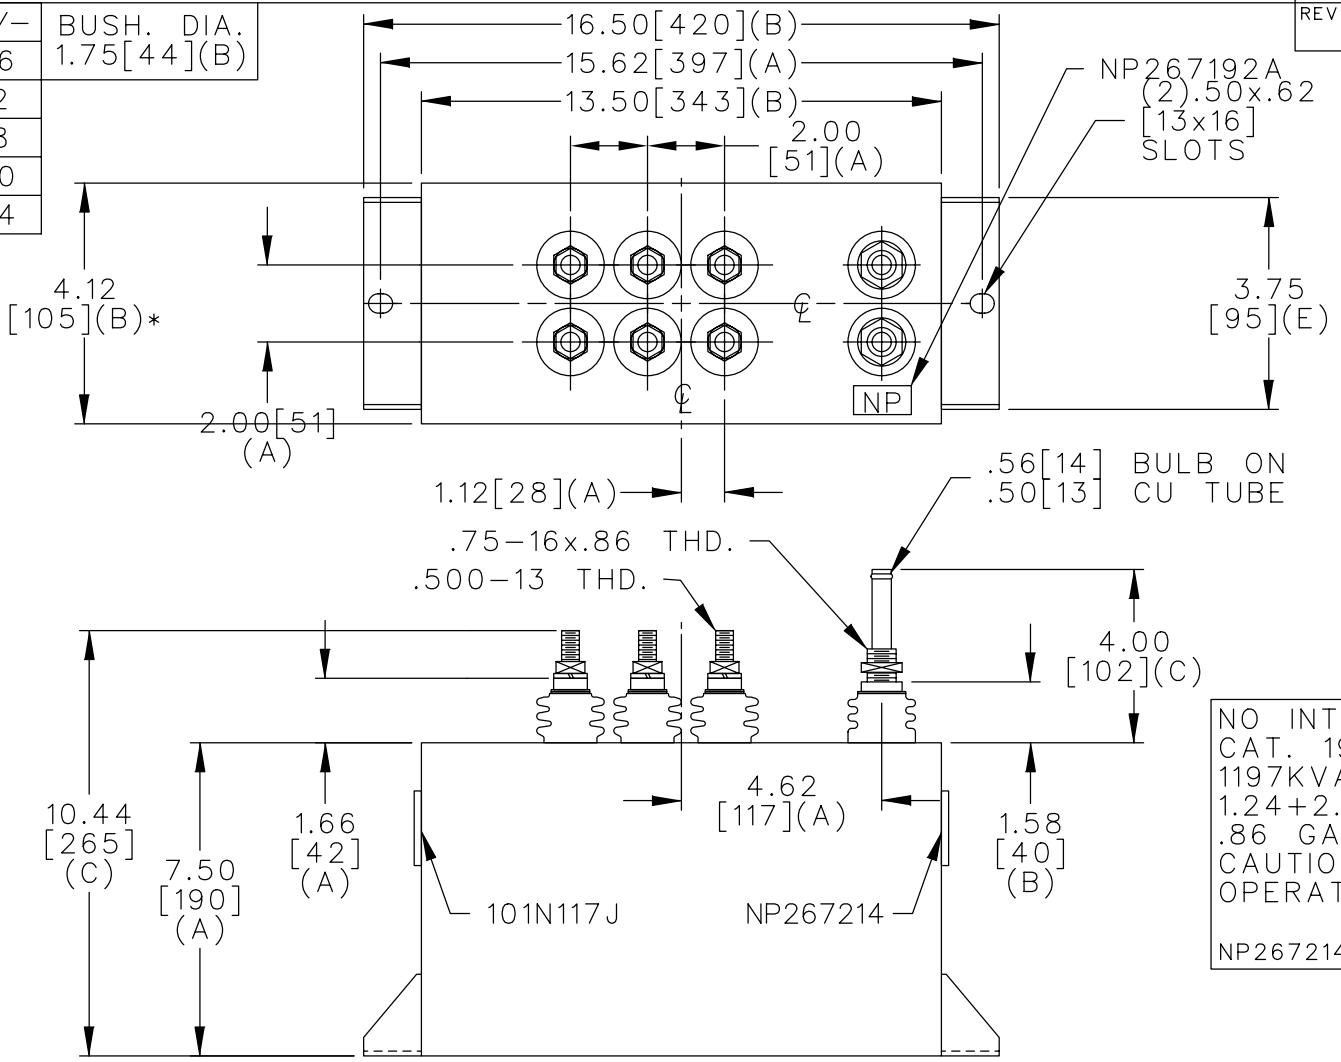

TERM	uF	kVAR
1	1.24	59.8
2	2.48	119.7
3	5.27	254.3
4	5.27	254.3
5	5.27	254.3
6	5.27	254.3

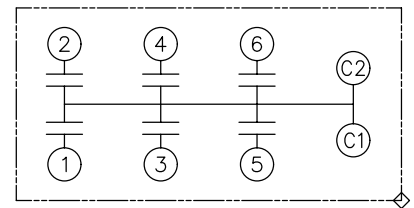

SCHEMATIC DIAGRAM - 615

NO INTERNAL DISCH RESISTORS
 CAT. 19L0285WH3 SN
 1197KVAR 1600V 3000HZ 1PH
 1.24+2.48+4x5.27 UF/TAP
 .86 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0285WH3	SHEET 2 CONT. ON -
	DRAWN E.McGINN	APR. 1, 1997	SCALE		
ISSUED	4-2-97	DISTR TO			