



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

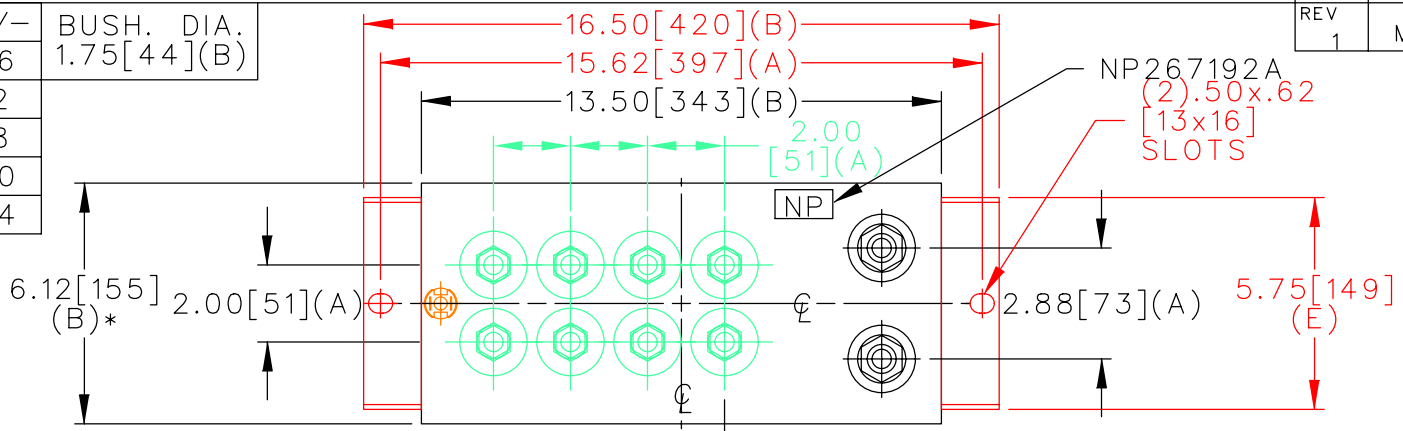


TERM	uF	kVAR
1	13.64	210
2	13.64	210
3	13.64	210
4	13.64	210
5	13.64	210
6	13.64	210
7	13.64	210
8	13.64	210

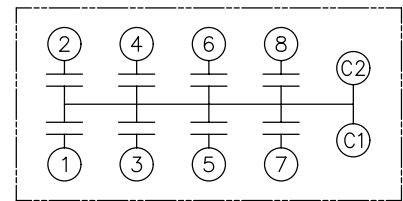

SCHEMATIC DIAGRAM - 800

PRESS.SW.  
12 PSIG N.C.

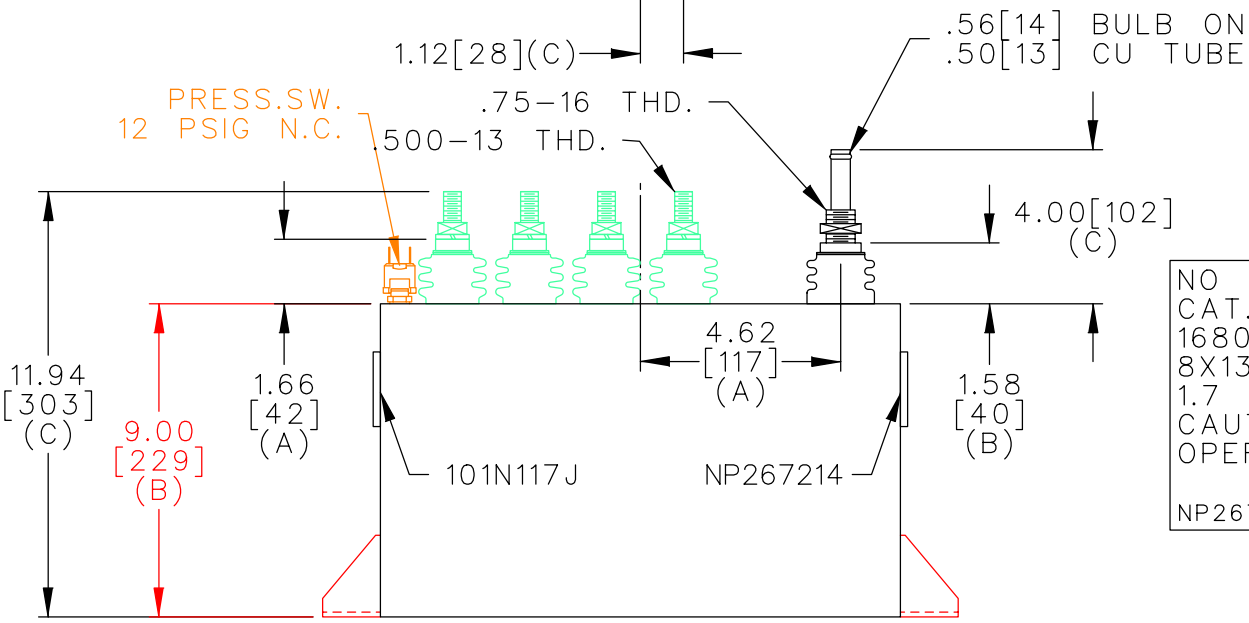

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0305WH4 SN  
 1680KVAR 700V 5000HZ 1PH  
 8X13.64 UF/TAP  
 1.7 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0305WH4	
	DRAWN E.McGINN	MAY 8, 1998	SCALE		
ISSUED	5-13-98		SHEET 2	CONT. ON	

DISTR TO