



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

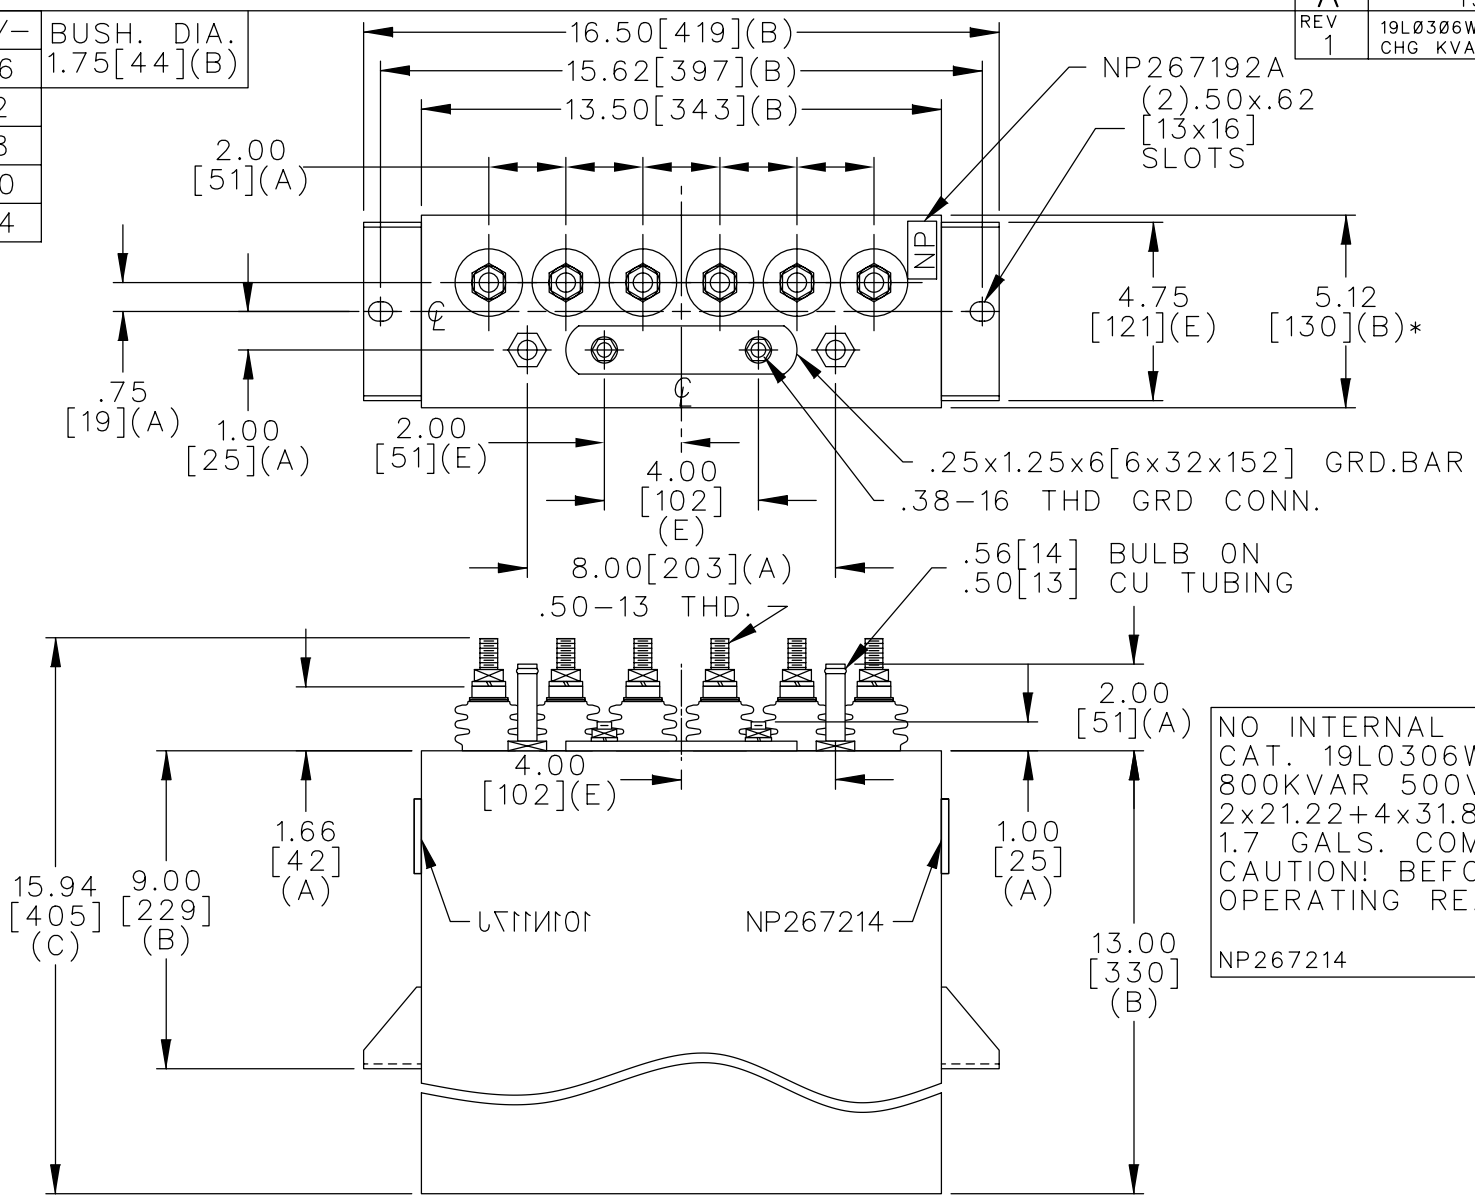

TERM	uF	kVAR
1	21.22	100
2	21.22	100
3	21.22	150
4	21.22	150
5	21.22	150
6	21.22	150

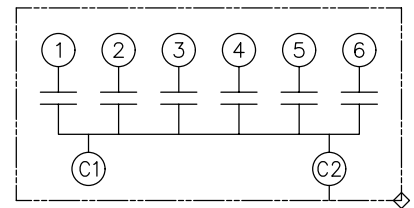

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0306WH3 SN
 800KVAR 500V 3000HZ 1PH
 2x21.22+4x31.83 UF/TAP
 1.7 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0306WH3	SHEET 2 CONT. ON -
	DRAWN E.McGINN NOV. 11, 1998	ISSUED 11-11-98	SCALE		