



TOL	+/-	BUSH. DIA.
A	.06	1.75[.44](B)
B	.12	
C	.18	
D	.50	
E	.04	

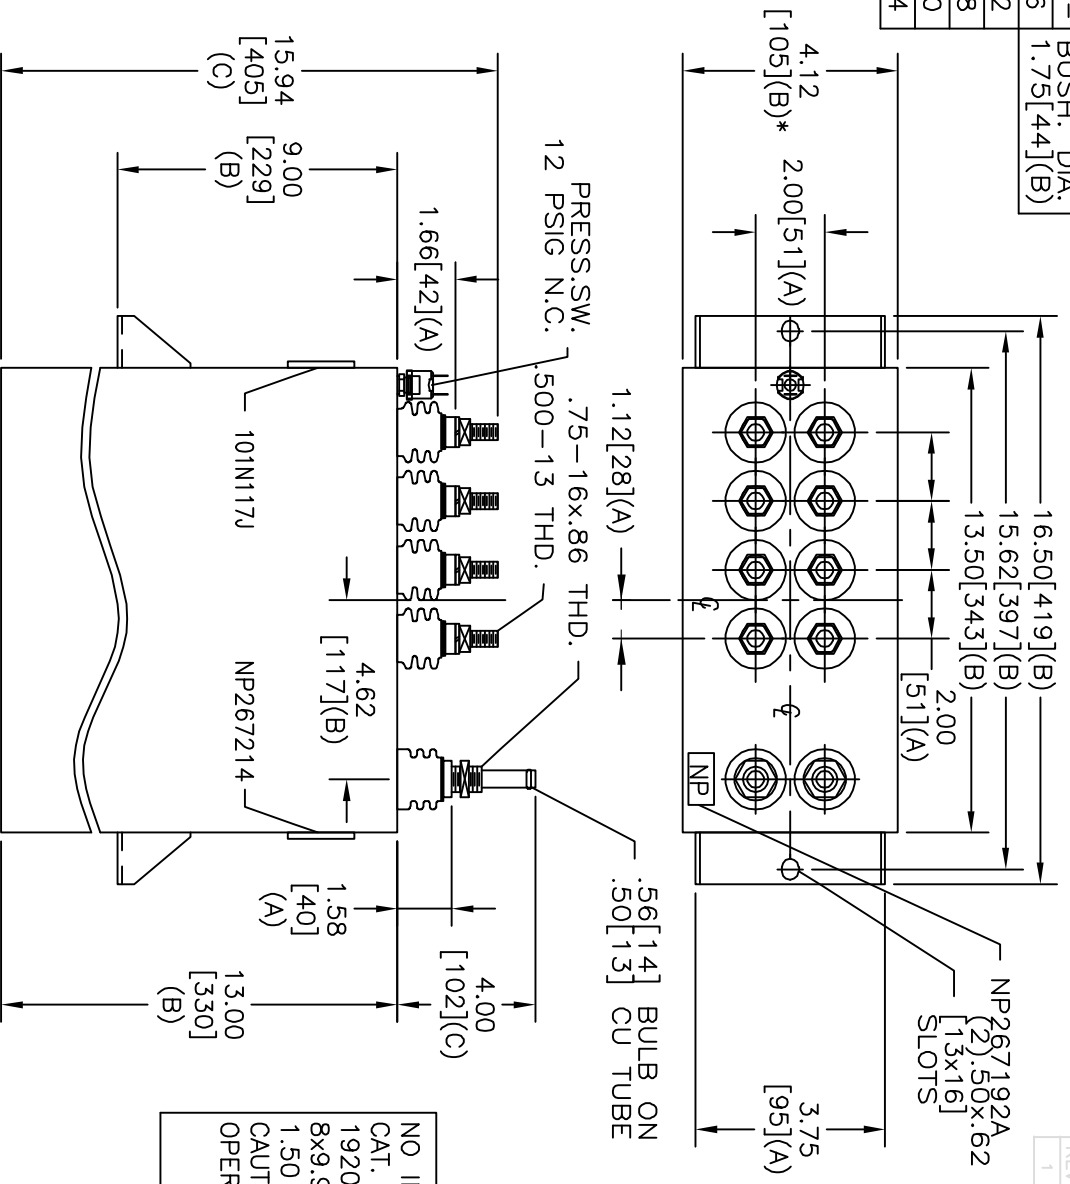

REV	DESCRIPTION	DATE	APPROVED
1	UPDATE CAT NO		MCGINN

TERM	UF	KVAR
1	9.95	240
2	9.95	240
3	9.95	240
4	9.95	240
5	9.95	240
6	9.95	240
7	9.95	240
8	9.95	240

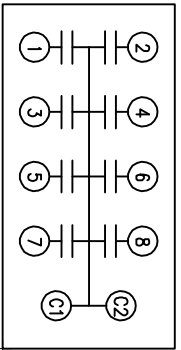

SCHEMATIC DIAGRAM - 800

NO INTERNAL DISCH RESISTORS
 CAT. 19L0308WH4 SN
 1920KVAR 800V 6000HZ 1PH
 8x9.95 UF/TAP
 1.50 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

		INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.		SIZE A
DRAWN E. McGinn	DATE JAN 24, 1997	SCALE A	OUTLINE 19L0308WH4	
ISSUED	DATE 1-30-97	SHEET 2	CONT ON	DIST. TO