




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

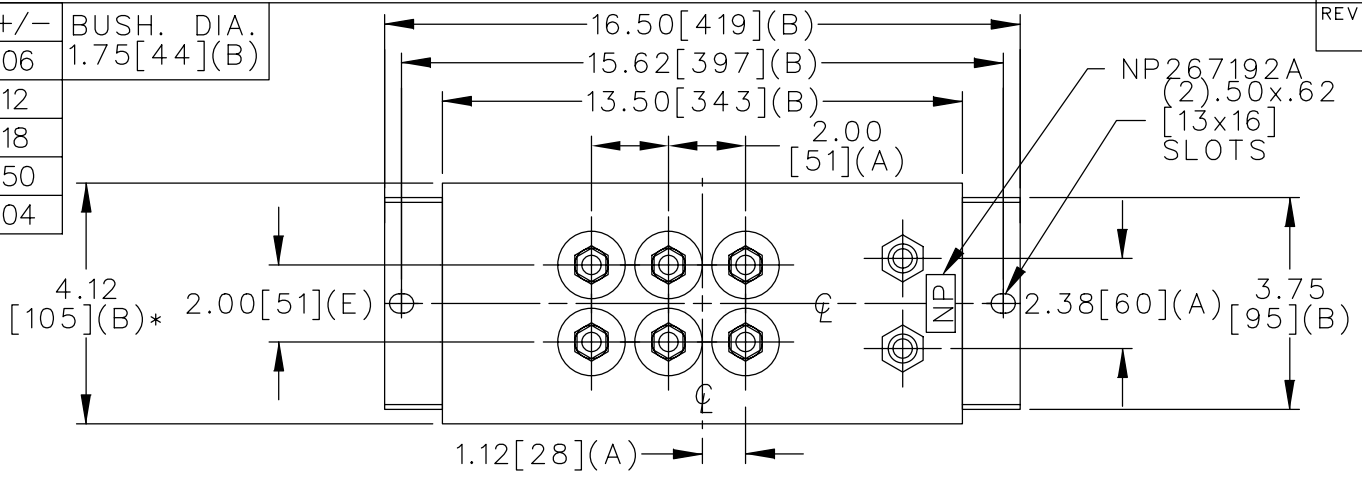

TERM	uF	kVAR
1	0.622	6.13
2	1.244	12.26
3	2.489	24.52
4	2.489	24.52
5	2.489	24.52
6	4.978	49.04

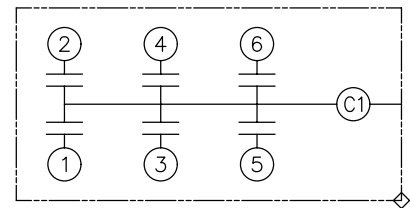

SCHEMATIC DIAGRAM - 606

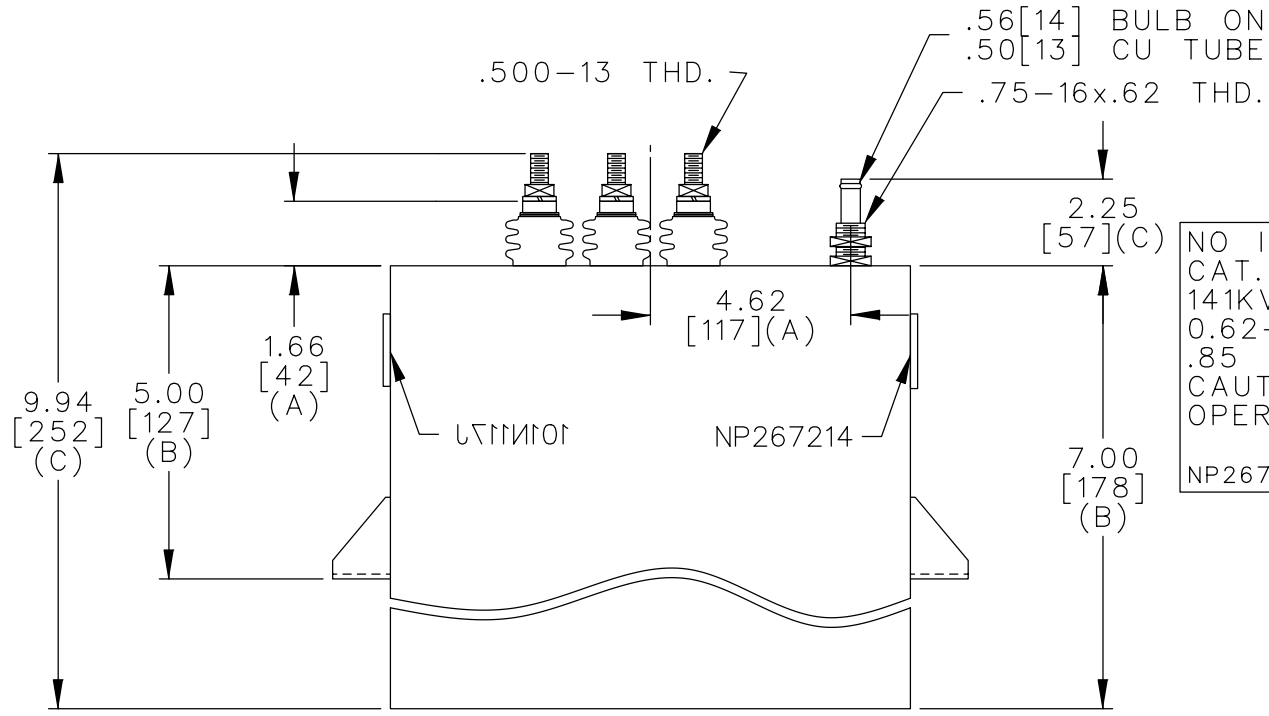

NO INTERNAL DISCH RESISTOR  
 CAT. 19L0309WH3 SN  
 141KVAR 280V 20000HZ 1PH  
 0.62+1.24+3x2.49+4.98 UF/TAP  
 .85 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	OUTLINE 19L0309WH3	
	DRAWN E.McGINN	APR. 1, 1997	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO