




TOL	+/-	BUSH. DIA.
A	.06	1.75[45](B)
B	.12	
C	.18	
D	.50	
E	.04	

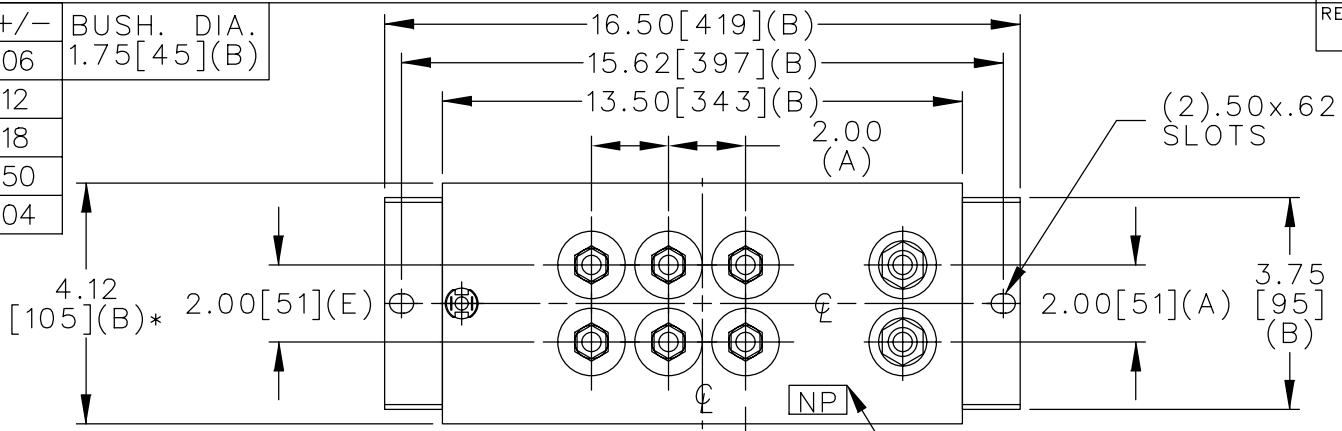

TERM	uF	kVAR
1	12.39	275
2	12.39	275
3	12.39	275
4	12.39	275
5	12.39	275
6	12.39	275

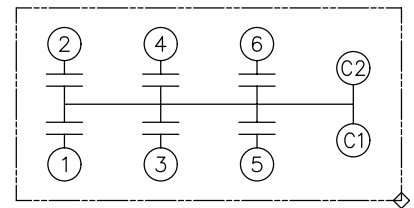

SCHEMATIC DIAGRAM - 615

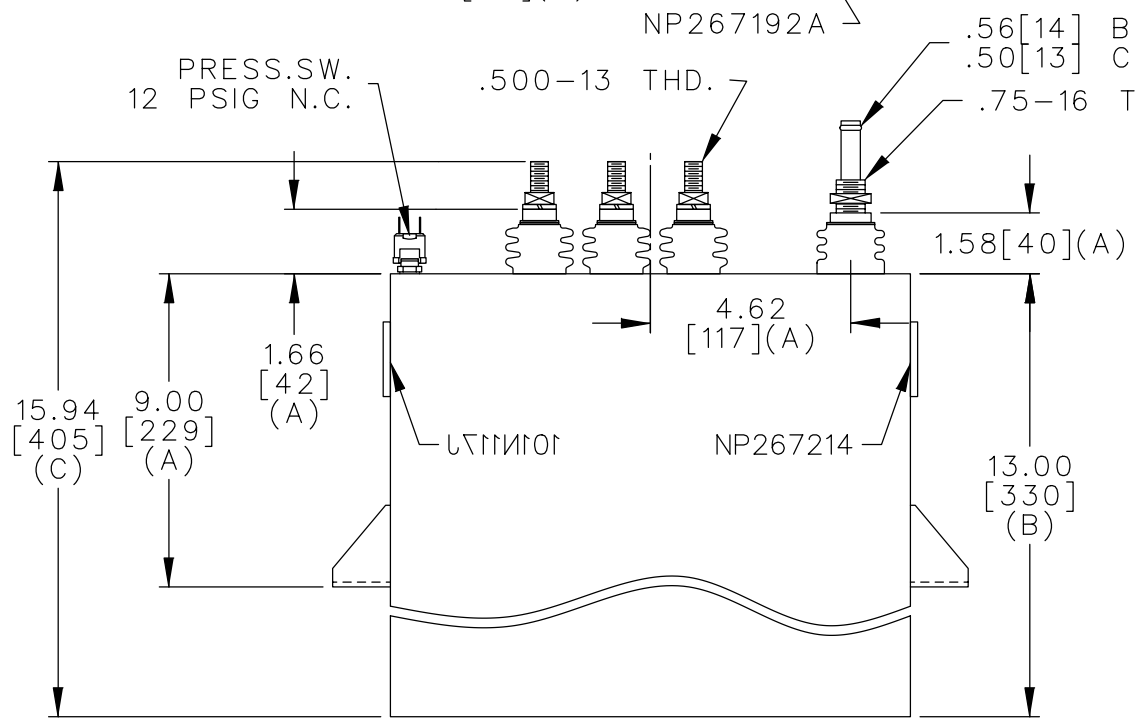

NO INTERNAL DISCH RESISTORS
 CAT. 19L0321WH4 SN
 1650KVAR 1100V 3000HZ 1PH
 6x12.39 UF/TAP
 1.5 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0321WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JULY 14, 1997	SCALE		
ISSUED	7-16-97	DISTR TO			