




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

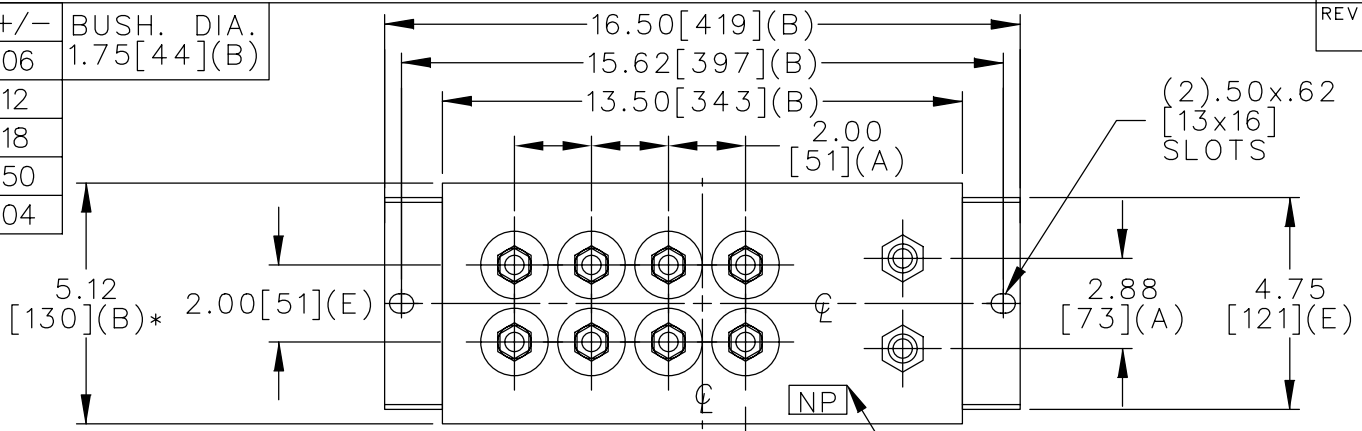

TERM	uF	kVAR
1	10.61	312.5
2	10.61	312.5
3	10.61	312.5
4	10.61	312.5
5	10.61	312.5
6	10.61	312.5
7	10.61	312.5
8	10.61	312.5

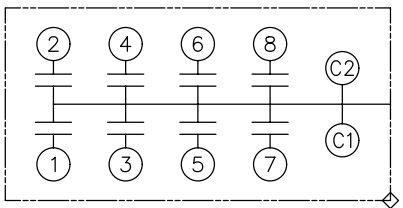

SCHEMATIC DIAGRAM - 801

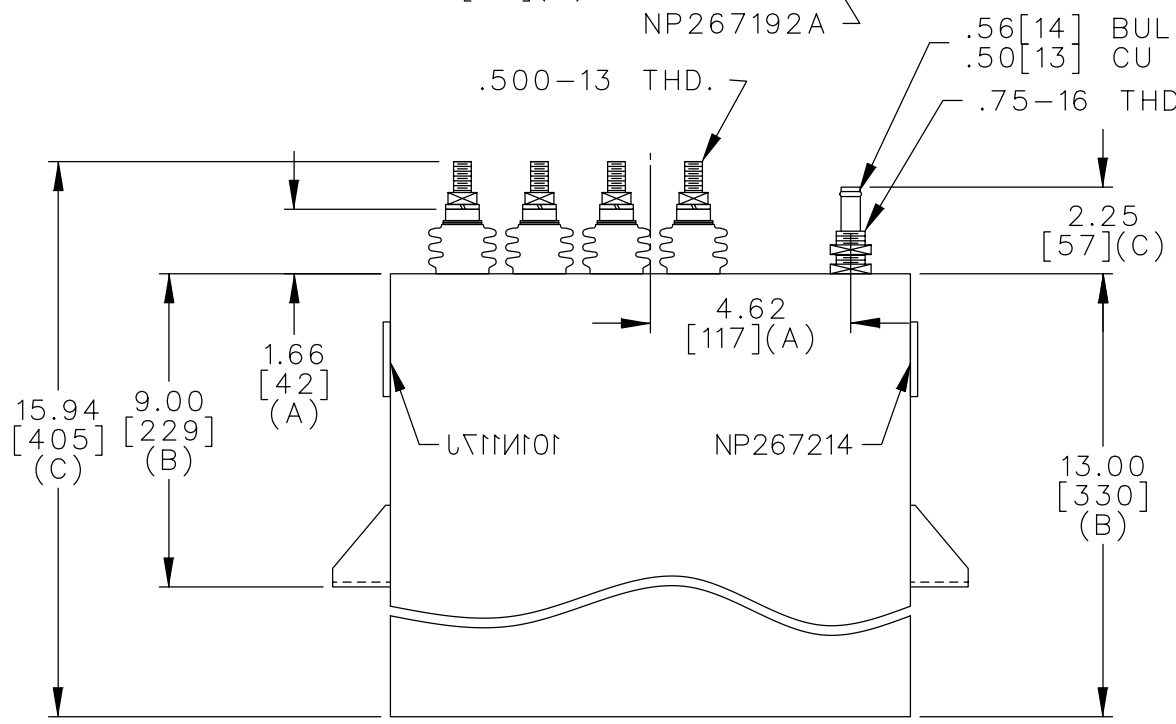

NO INTERNAL DISCH RESISTORS
 CAT. 19L0322WH3 SN
 2500KVAR 1250V 3000HZ 1PH
 8X10.61 UF/TAP
 1.7 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

<p>CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.</p>	SIZE A	<p>OUTLINE 19L0322WH3</p>	SHEET 2 CONT. ON -
	<p>DRAWN BROSS NOV. 29, 2001</p>		
<p>ISSUED</p>			

DISTR TO