



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

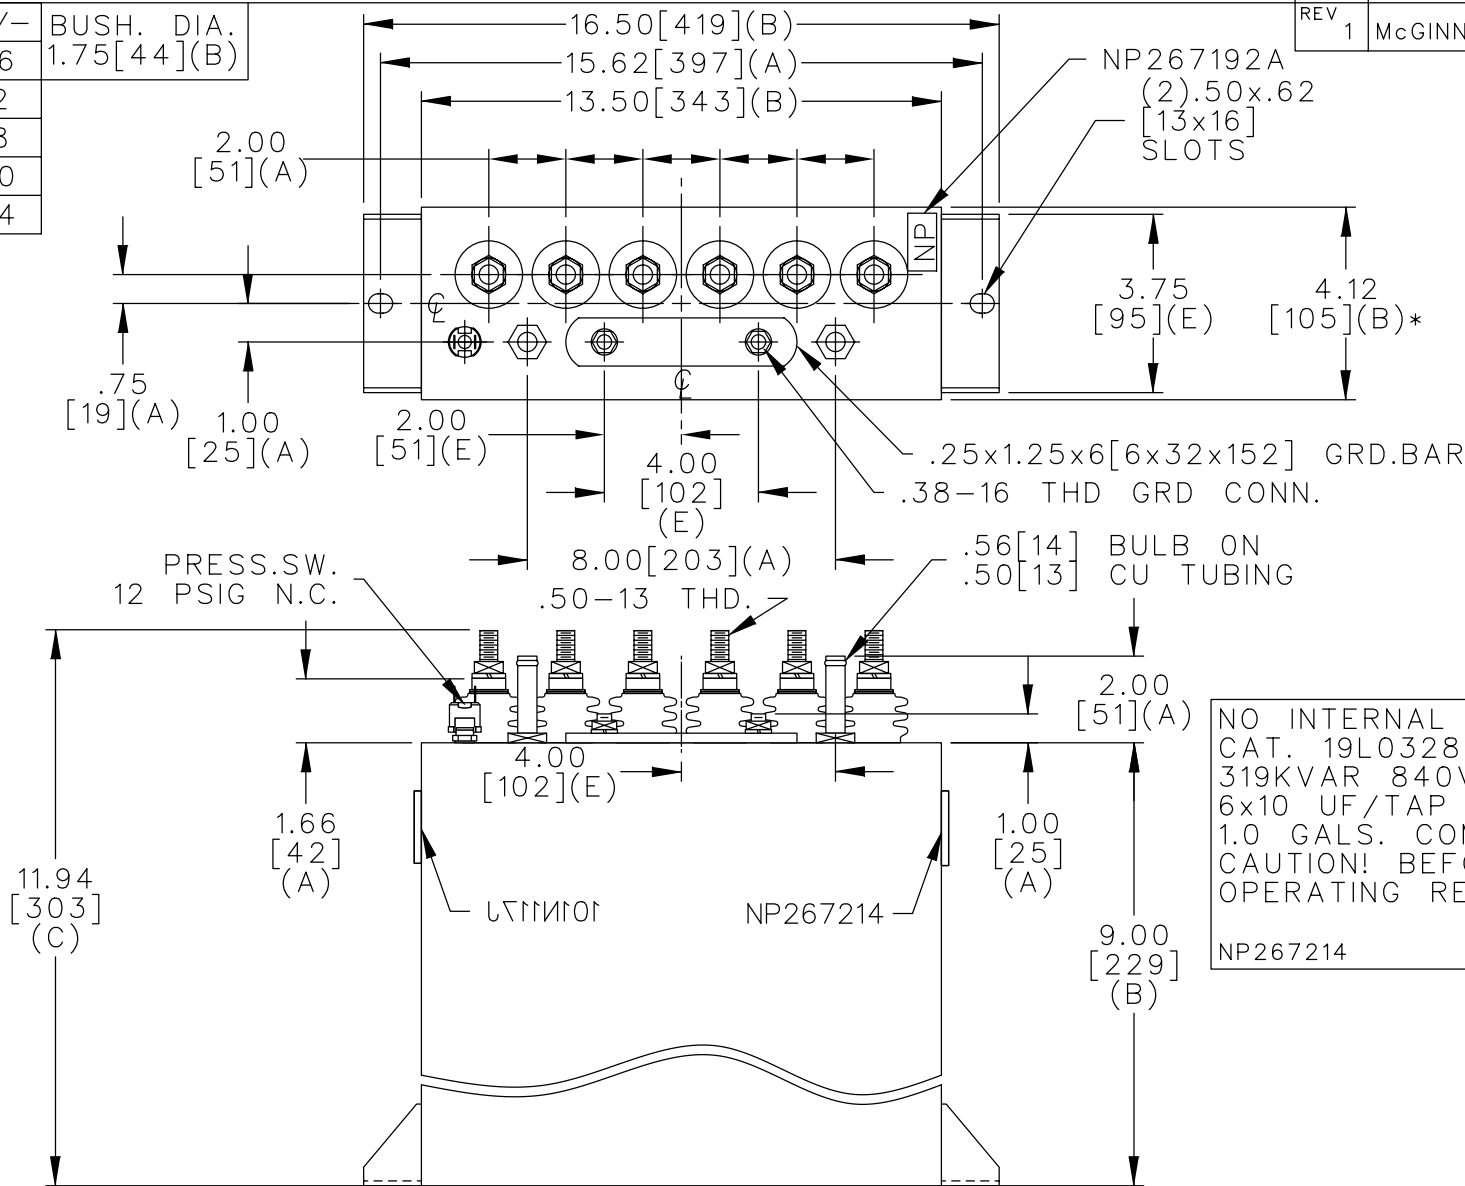

TERM	uF	kVAR
1	10	53
2	10	53
3	10	53
4	10	53
5	10	53
6	10	53

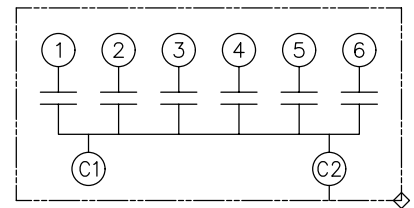

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0328WH4 SN  
 319KVAR 840V 1200HZ 1PH  
 6x10 UF/TAP  
 1.0 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0328WH4</b>	
	DRAWN E.McGINN	MAY 19, 1998	SCALE		
ISSUED	5-20-98	SHEET	2	CONT.	ON -

DISTR TO