

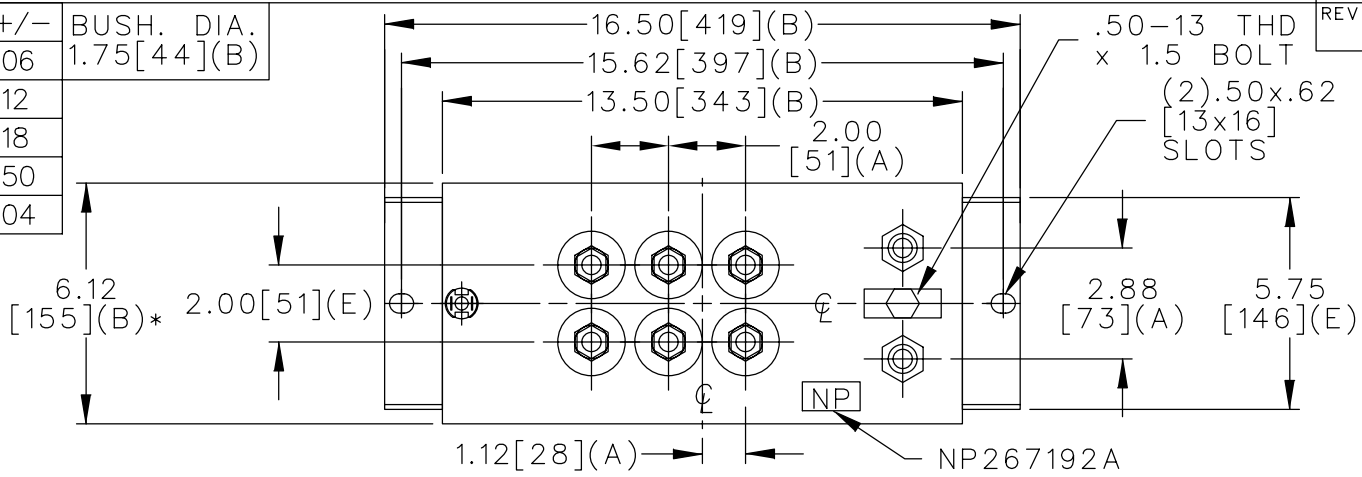


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

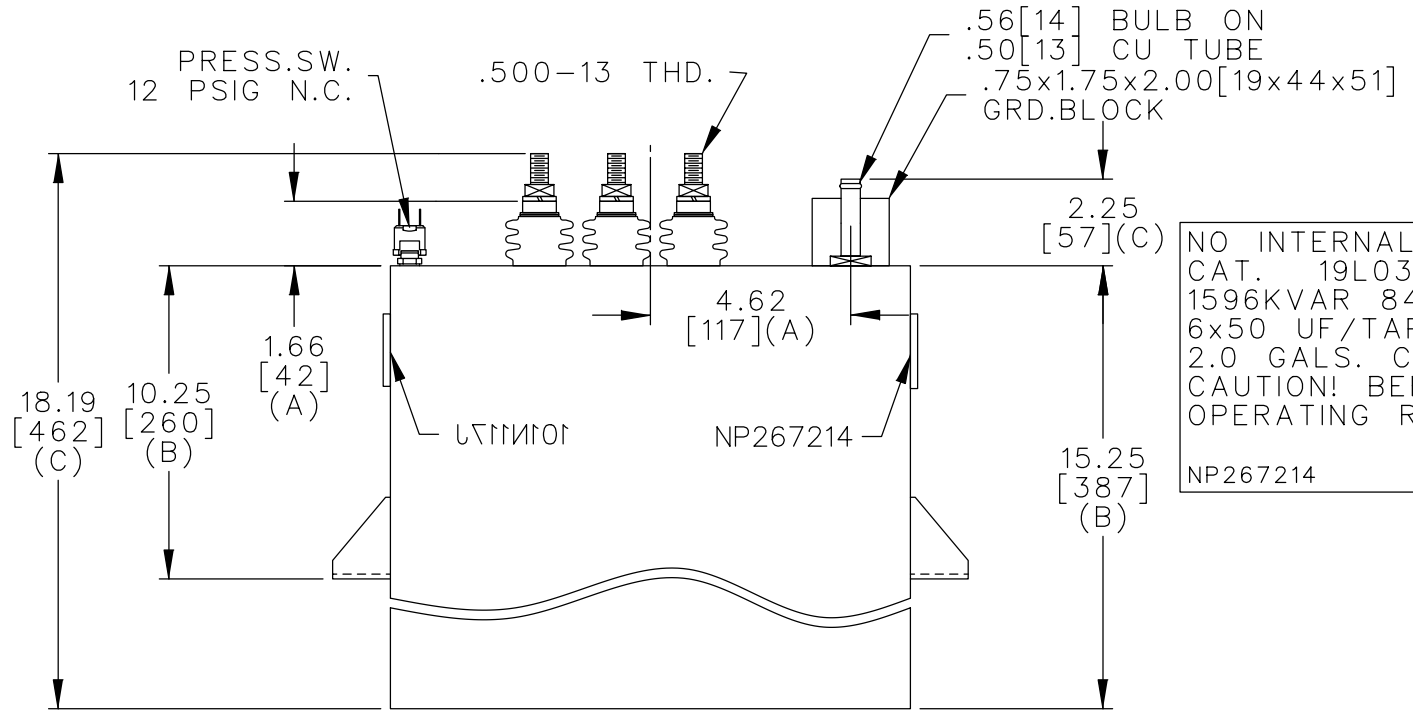

TERM	uF	kVAR
1	50	266
2	50	266
3	50	266
4	50	266
5	50	266
6	50	266

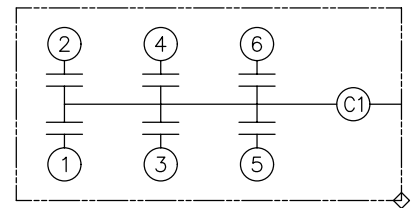

NO INTERNAL DISCH RESISTORS
CAT. 19L0329WH4 SN
1596KVAR 840V 1200HZ 1PH
6x50 UF/TAP
2.0 GALS. COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING OR
OPERATING READ GEH-2733
NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

<p>CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.</p>	SIZE	<p>A</p>	<p>OUTLINE 19L0329WH4</p>
	<p>DRAWN E.McGINN DEC. 12, 1997</p>		
<p>ISSUED</p>	<p>SHEET 2 CONT. ON 3</p>	<p>DISTR TO</p>	